THE PROVINCE OF TRANSVAAL

Official Gazette

(Registered at the Post Office as a Newspaper)

PRICE S.A. 10c OVERSEAS 15c

DIE PROVINSIE TRANSVAAL

Offisiële Koerant

(As 'n Nuusblad by die Poskantoor Geregistreer)

PRYS: S.A. 10c OORSEE 15c

VOL. 221 PRETORIA 19 OCTOBER, 19 OKTOBER 1977 3916

MENIKO

WERKEMAN LIBRARY

No. 214 (Administrator's), 1977.

PROCLAMATION

Under the powers vested in me by section 4 of the Local Authorities Roads Ordinance, 1904, read with section 80 of the Republic of South Africa Constitution Act, 1961, I do hereby proclaim the road as described in the Schedule hereto as a public road under the jurisdiction of the Town Council of Boksburg.

Given under my Hand at Pretoria, this 5th day of October, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 3-6-6-2-8-25

SCHEDULE.

A Road over—

(a) Portion 31 of the farm Vogelfontein 84-I.R. as described by the letters ABCDEFG on Diagram S.G. A.2863/77.

(b) Portion 42 of the farm Vogelfontein 84-I.R. as described by the letters FJKG on Diagram S.G. A.2863/77.

(c) Portion 43 of the farm Vogelfontein 84-I.R. as described by the letters KJLMN on Diagram S.G. A.2863/77.

(d) Portion 41 of the farm Vogelfontein 84-I.R. as described by the letters SNPQR on Diagram S.G. A.2863/77.

(e) Portion 40 of the farm Vogelfontein 84-I.R. as described by the letters UVSRT on Diagram S.G. A.2863/77.

(f) Portion 39 of the farm Vogelfontein 84-I.R. as described by the letters WXVU on Diagram S.G. A.2863/77.

(g) Portion 38 of the farm Vogelfontein 84-I.R. as described by the letters B'AXWYZA' on Diagram S.G. A.2863/77.

No. 214 (Administrateurs-), 1977.

PROKLAMASIE

Kragtens die bevoegdhede aan my verleen by artikel 4 van die "Local Authorities Roads Ordinance", 1904, gelees met artikel 80 van die Grondwet van die Republiek van Suid-Afrika, 1961, proklameer ek hierby die pad soos omskryf in die bygaande Bylae tot 'n publieke pad onder die regsbevoegdheid van die Stadsraad van Boksburg.

Gegee onder my Hand te Pretoria, op hede die 5de dag van Oktober, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 3-6-6-2-8-25

BYLAE.

'n Pad oor—

(a) Gedeelte 31 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters ABCDEFG op Kaart L.G. A.2863/77.

(b) Gedeelte 42 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters FJKG op Kaart L.G. A.2863/77.

(c) Gedeelte 43 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters KJLMN op Kaart L.G. A.2863/77.

(d) Gedeelte 41 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters SNPQR op Kaart L.G. A.2863/77.

(e) Gedeelte 40 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters UVSRT op Kaart L.G. A.2863/77.

(f) Gedeelte 39 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters WXVU op Kaart L.G. A.2863/77.

(g) Gedeelte 38 van die plaas Vogelfontein 84-I.R. soos aangedui deur die letters B'AXWYZA' op Kaart L.G. A.2863/77.

No. 215 (Administrator's), 1977.

PROCLAMATION

Under the powers vested in me by section 4 of the Local Authorities Roads Ordinance, 1904, read with section 80 of the Republic of South Africa Constitution

No. 215 (Administrateurs-), 1977.

PROKLAMASIE

Kragtens die bevoegdhede aan my verleen by artikel 4 van die "Local Authorities Roads Ordinance", 1904, gelees met artikel 80 van die Grondwet van die Repu-

Act, 1961, I do hereby proclaim the road as described in the Schedule hereto as a public road under the jurisdiction of the Town Council of Verwoerdburg.

Given under my Hand at Pretoria, this 29th day of September, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 3-6-6-2-93

SCHEDULE.

A Road over —

(a) Holding 234 Lyttelton Agricultural Holdings Extension 1 as described by the letters ABCDA on Diagram S.G. A.3936/76;

(b) Portion 35 of the farm Zwartkop 356-J.R. as described by the letters aBCDe middle of Ses Myl Spruit a on Diagram S.G. A.3937/76;

(c) Remainder of Portion 88 of the farm Zwartkop 356-J.R. as described by the letters ABCd middle of Ses Myl Spruit eA on Diagram S.G. A.3938/76.

bliek van Suid-Afrika, 1961, proklameer ek hierby die pad soos omskryf in die bygaande Bylae tot 'n publieke pad onder die regsbevoegdheid van die Stadsraad van Verwoerdburg.

Gegee onder my Hand te Pretoria, op hede die 29ste dag van September, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 3-6-6-2-93

BYLAE.

'n Pad oor —

(a) Hoewe 234 Lyttelton Landbouhoewes Uitbreiding 1 soos aangedui deur die letters ABCDA op Kaart L.G. A.3936/76;

(b) Gedeelte 35 van die plaas Zwartkop 356-J.R. soos aangedui deur die letters aBCDe middel van Ses Myl Spruit a op Kaart L.G. A.3937/76;

(c) Restant van Gedeelte 88 van die plaas Zwartkop 356-J.R. soos aangedui deur die letters ABCd middel van Ses Myl Spruit eA op Kaart L.G. A.3938/76.

No. 216 (Administrator's), 1977.

PROCLAMATION

by the Director of Roads of the Province Transvaal.

In terms of section 7(1) of the Advertising on Roads and Ribbon Development Act, 1940 (Act 21 of 1940), and pursuant to the powers delegated to me in terms of section 16 of the said Act, I hereby proclaim that the public roads described in the subjoined Schedule, shall as from the date hereof, be building restriction roads for the purpose of the said Act.

Given under my Hand at Pretoria on this 4th day of October, One thousand Nine hundred and Seventy-seven.

L. J. TERBLANCHE,
Director of the Roads Department
of the Province Transvaal.
DP. 07-41/2

SCHEDULE.

Road	*Description of Road*
88	The road commences at its junction with Provincial Road P20-4 on the farm Town and Townlands of Potchefstroom 435-I.Q., from where it proceeds in a westerly direction over the farms Modderfontein 383-I.P., Nooitverwacht 385-I.P. and Rietkuil 378-I.P., district of Potchefstroom, Eleazar 377-I.P., Syferfontein 376-I.P. and Goedgevonden 356-I.P., district of Klerksdorp and ends at its junction with Road 784.
89	The road commences at its junction with Road 566 on the farm Kromdraai 352-I.P., from where it proceeds in a northerly direction over the farms Leeuwfontein 350-I.P., Roodekop 229-I.P., Vlakfontein 213-I.P. and Palmietfontein 189-I.P., district of Ventersdorp, and ends at its junction with Provincial Road P20-4.

No. 216 (Administrateurs-), 1977.

PROKLAMASIE

deur die Direkteur van Paaie van die Provinsie Transvaal.

Ingevolge artikel 7(1) van die Wet op Adverteer Langs en Toebou van Paaie, 1940 (Wet 21 van 1940), en ooreenkomstig die bevoegdhede aan my verleen ingevolge artikel 16 van die genoemde Wet, proklameer ek hiermee met ingang van die datum hiervan die openbare paaie wat in die bygaande Bylae beskryf is, tot boubeperkingspaaie met die oog op die vermelde Wet.

Gegee onder my Hand te Pretoria, op hede die 4de dag van Oktober, Eenduisend Negehonderd Sewe-en-sewentig.

L. J. TERBLANCHE,
Direkteur van die Paaiedepartement
van die Provinsie Transvaal.
DP. 07-41/2

BYLAE.

Pad	*Beskrywing van Pad*
88	Die pad begin by die aansluiting by Provinsiale Pad P20-4 op die plaas Town and Townlands of Potchefstroom 435-I.Q., strek in 'n westelike rigting oor die plase Modderfontein 383-I.P., Nooitverwacht 385-I.P. en Rietkuil 378-I.P., distrik Potchefstroom; Eleazar 377-I.P., Syferfontein 376-I.P., Goedgevonden 356-I.P., distrik Klerksdorp, en eindig by die aansluiting by Pad 784.
89	Die pad begin by die aansluiting by Pad 566 op die plaas Kromdraai 352-I.P., strek in 'n noordelike rigting oor die plase Leeuwfontein 350-I.P., Roodekop 229-I.P., Vlakfontein 213-I.P. en Palmietfontein 189-I.P., distrik Ventersdorp, en eindig by die aansluiting by Provinsiale Pad P20-4.

Road	Description of Road
307	The road commences at its junction with Road 88 on the farm Brakspruit 370-I.P., from where it proceeds in a westerly direction over the farms Voorspoed 366-I.P., Lapfontein 363-I.P., Geduld 270-I.P., Rietfontein 266-I.P. and Paardeplaats 265-I.P., district of Klerksdorp and ends at its junction with Provincial Road P56-1.
433	The road commences at its junction with Provincial Road P34-3 on the farm Biesjesvallei 149-I.O., from where it proceeds in a north-westerly direction over the farms Holfontein 147-I.O., Kyl 115-I.O., Pleizier 113-I.O., Makoeiespan 97-I.O., Schoongezicht 109-I.O. and Nooitgedacht 98-I.O., district of Lichtenburg and ends at its junction with Provincial Road P183-1.
464	The road commences at its junction with Provincial Road P3-2 on the farm Witgatboom 317-H.O., from where it proceeds in a northerly direction over the farms Zoutpan 301-H.O., Holwater 302-H.O., Blaauwboschpan 293-H.O., Kafferspan 273-H.O., Gezicht 265-H.O., Boschplaats 138-H.O., Vuurfontein 117-H.O., district of Bloemhof; Homansvlei 110-H.O., Houtvolop 111-H.O., Mooilaagte 91-H.O., Hamburg 82-H.O., Grootpoort 83-H.O., and Mimosa 61-H.O., district of Schweizer-Reneke, and ends at its junction with Provincial Road P34-5.
510	The road commences at its junction with Provincial Road P3-3 on the farm Rietfontein 247-H.O., district of Wolmaransstad whence it proceeds in a north-westerly direction over the farms Kalkputs 245-H.O., Leeuwbosschen 231-H.O. and Kareepan 232-H.O., district of Bloemhof, Vlakplaats 215-H.O., district of Wolmaransstad, Kareeboschfontein 222-H.O., district of Bloemhof, and Hartsfontein 216-H.O., district of Schweizer-Reneke, and terminates at its junction with Road 565.
566	The road commences at its junction with Provincial Road P89-1 on the farm Oudedorp 376-I.Q., from where it proceeds in a westerly direction over the farms Witkoppies 382-I.Q. and Welgegund 375-I.Q., up to its junction with Provincial Road P20-4; starts again further north at its junction with Provincial Road P20-4 on the farm Wildebeeslaagte 374-I.Q., proceeds in a westerly, south-westerly and southerly direction and once again in a south-westerly direction over the farms Syferfontein 351-I.P., Kromdraai 352-I.P. and Rietkuil 378-I.P., district of Potchefstroom, and ends at its junction with Road 834.
606	The road commences at its junction with Road 028 on the farm Putfontein 62-I.P., from where it proceeds in a northerly direction over the farms Welgevonden 43-I.P., Twee Buffels Geschiet 42-I.P., district of Coligny, Klippan 15-I.P., Goedvooruitzicht 120-I.P., Klippan 13-I.P., Grootpan 117-I.P. and Doornkop 372-I.P., district of Lichtenburg, and ends at its junction with Provincial Road P34-2.
653	The road commences at its junction with Road 1013 on the farm Rietspruit 322-I.O., district of Lichtenburg, from where it proceeds in a north-westerly direction over the farms Disselboompan 290-I.O., Dwaalkraal 291-I.O. and De Klipdrift

Pad	Beskrywing van Pad
307	Die pad begin by die aansluiting by Pad 88 op die plaas Brakspruit 370-I.P., strek in 'n westelike rigting oor die plase Voorspoed 366-I.P., Lapfontein 363-I.P., Geduld 270-I.P., Rietfontein 266-I.P. en Paardeplaats 265-I.P., distrik Klerksdorp, en eindig by die aansluiting by Provinsiale Pad P56-1.
433	Die pad begin by die aansluiting by Provinsiale Pad P34-3 op die plaas Biesjesvallei 149-I.O., strek in 'n noordwestelike rigting oor die plase Holfontein 147-I.O., Kyl 115-I.O., Pleizier 113-I.O., Makoeiespan 97-I.O., Schoongezicht 109-I.O. en Nooitgedacht 98-I.O., distrik Lichtenburg, en eindig by die aansluiting by Provinsiale Pad P183-1.
464	Die pad begin by die aansluiting by Provinsiale Pad P3-2 op die plaas Witgatboom 317-H.O., strek in 'n noordelike rigting oor die plase Zoutpan 301-H.O., Holwater 302-H.O., Blaauwboschpan 293-H.O., Kafferspan 273-H.O., Gezicht 265-H.O., Boschplaats 138-H.O., Vuurfontein 117-H.O., distrik Bloemhof; Homansvlei 110-H.O., Houtvolop 111-H.O., Mooilaagte 91-H.O., Hamburg 82-H.O., Grootpoort 83-H.O. en Mimosa 61-H.O., distrik Schweizer-Reneke, en eindig by die aansluiting daarvan by Provinsiale Pad P34-5.
510	Die pad begin by die aansluiting by Provinsiale Pad P3-3 op die plaas Rietfontein 247-H.O., distrik Wolmaransstad strek in 'n noordwestelike rigting oor die plase Kalkputs 245-H.O., Leeuwbosschen 231-H.O. en Kareepan 232-H.O., distrik Bloemhof, Vlakplaats 215-H.O., distrik Wolmaransstad, Kareeboschfontein 222-H.O., distrik Bloemhof en Hartsfontein 216-H.O., distrik Schweizer-Reneke en eindig by die aansluiting by Pad 565.
566	Die pad begin by die aansluiting by Provinsiale Pad P89-1 op die plaas Oudedorp 376-I.Q., strek in 'n westelike rigting oor die plase Witkoppies 382-I.Q., en Welgegund 375-I.Q., tot by die aansluiting by Provinsiale Pad P20-4; begin weer verder noord by die aansluiting by Provinsiale Pad P20-4 op die plaas Wildebeeslaagte 374-I.Q., strek in 'n westelike, suidwestelike en suidelike rigting en weer eens in 'n suidwestelike rigting oor die plase Syferfontein 351-I.P., Kromdraai 352-I.P. en Rietkuil 378-I.P., distrik Potchefstroom, en eindig by die aansluiting by Pad 834.
606	Die pad begin by die aansluiting daarvan by Pad 028 op die plaas Putfontein 62-I.P., strek in 'n noordelike rigting oor die plase Welgevonden 43-I.P., Twee Buffels Geschiet 42-I.P., distrik Coligny, Klippan 15-I.P., Goedvooruitzicht 120-I.P., Klippan 13-I.P., Grootpan 117-I.P. en Doornkop 372-I.P., distrik Lichtenburg, en eindig by die aansluiting by Provinsiale Pad P34-2.
653	Die pad begin by die aansluiting by Pad 1013 op die plaas Rietspruit 322-I.O., distrik Lichtenburg, strek in 'n noordwestelike rigting oor die plase Disselboompan 290-I.O., Dwaalkraal 291-I.O. en

Road	Description of Road
	295-I.O., district of Delareyville, and ends at its junction with Road 894.
728	The road commences at its junction with Road 1227 on the farm De Hoop 198-H.O., whence it proceeds in a north-westerly direction over the farms Makaauwkop 167-H.O., Biesielaagte 53-H.O., Koppiesfontein 52-H.O., Koppiesvley 14-H.O. and Jala Jala 10-H.O., district of Schweizer-Reneke, and ends at its junction with Provincial Road P34-4.
828	The road commences at its junction with Road 307 on the farm Lapfontein 363-I.P., from where it proceeds in a north-westerly direction over the farms Rooikuil 362-I.P., Palmietfontein 248-I.P., Smalpunt 247-I.P. and Kafferskraal 243-I.P., district of Klerksdorp, and ends at its junction with Road 149.
834	The road commences at its junction with Road 88 on the farm Modderfontein 383-I.P., from where it proceeds in a north-westerly direction over the farms Rietkuil 378-I.P., Rooipoort 354-I.P., district of Potchefstroom; Witrandsfontein 348-I.P., Bulskop 225-I.P. and 226-I.P., Strydfontein 223-I.P. and Klipplaatdrift 224-I.P., district of Ventersdorp, and ends at its junction with Road 145.
912	The road commences at its junction with Road 1227 on the farm De Hoop 198-H.O., from where it proceeds in a north-easterly direction over the farms Diamanddoorns 169-H.O. and Doornhoek 165-H.O., district of Schweizer-Reneke, and ends at its junction with Road 774.
1067	The road commences at its junction with Road 1401 on the farm Klippan 133-I.O., from where it proceeds in a northerly direction over the farms Kalkfontein 132-I.O. and Schoongezicht 120-I.O., district of Delareyville, and ends at its junction with Road 653.
1150	The road commences at its junction with Provincial Road P20-4 on the farm Kaalfontein 212-I.P., from where it proceeds in an easterly direction over the farms Blesbokfontein 211-I.P., Syferbult 132-I.P., Thyszyndoorns 131-I.Q. and Rooidraai 85-I.Q., district of Ventersdorp, and ends at its junction with Road 90.
1152	The road commences at its junction with Provincial Road P20-4 on the farm Kaalfontein 212-I.P., from where it proceeds in a westerly direction over the farms Vlakfontein 213-I.P. and Klipplaatdrift 224-I.P., district of Ventersdorp, and ends at its junction with Road 145.
1227	The road commences at its junction with Road 565 on the farm Hartsfontein 216-H.O., from where it proceeds in a general northerly direction over the farms Langverwacht 196-H.O., Vaalboschbult 195-H.O., Grootlaagte 190-H.O., Zitland 171-H.O., Diamanddoorns 169-H.O., De Hoop 198-H.O., Makaauwkop 167-H.O., Zoetfontein 168-H.O., Nooitgedacht 144-H.O., Rosewood 390-I.O. and Rosalie 391-I.O., district of Schweizer-Reneke, and ends at its junction with Road 911.
1401	The road commences at its junction with Road 657 on the farm Welverdiend 304-I.O., whence

Pad	Beskrywing van Pad
	De Klipdrift 295-I.O., distrik Delareyville, en eindig by die aansluiting by Pad 894.
728	Die pad begin by die aansluiting by Pad 1227 op die plaas De Hoop 198-H.O., strek in 'n noordwestelike rigting oor die plase Makaauwkop 167-H.O., Biesielaagte 53-H.O., Koppiesfontein 52-H.O., Koppiesvley 14-H.O. en Jala Jala 10-H.O., distrik Schweizer-Reneke, en eindig by die aansluiting by Provinsiale Pad P34-4.
828	Die pad begin by die aansluiting by Pad 307 op die plaas Lapfontein 363-I.P., strek in 'n noordwestelike rigting oor die plase Rooikuil 362-I.P., Palmietfontein 248-I.P., Smalpunt 247-I.P. en Kafferskraal 243-I.P., distrik Klerksdorp, en eindig by die aansluiting by Pad 149.
834	Die pad begin by die aansluiting by Pad 88 op die plaas Modderfontein 383-I.P., strek in 'n noordwestelike rigting oor die plase Rietkuil 378-I.P., Rooipoort 354-I.P., distrik Potchefstroom; Witrandsfontein 348-I.P., Bulskop 225-I.P. en 226-I.P., Strydfontein 223-I.P. en Klipplaatdrift 224-I.P., distrik Ventersdorp en eindig by die aansluiting by Pad 145.
912	Die pad begin by die aansluiting by Pad 1227 op die plaas De Hoop 198-H.O., strek in 'n noordoostelike rigting oor die plase Diamanddoorns 169-H.O. en Doornhoek 165-H.O., distrik Schweizer-Reneke, en eindig by die aansluiting by Pad 774.
1067	Die pad begin by die aansluiting by Pad 1401 op die plaas Klippan 133-I.O., strek in 'n noordelike rigting oor die plase Kalkfontein 132-I.O. en Schoongezicht 120-I.O., distrik Delareyville, en eindig by die aansluiting daarvan by Pad 653.
1150	Die pad begin by die aansluiting by Provinsiale Pad P20-4 op die plaas Kaalfontein 212-I.P., strek in 'n oostelike rigting oor die plase Blesbokfontein 211-I.P., Syferbult 132-I.P., Thyszyndoorns 131-I.Q. en Rooidraai 85-I.Q., distrik Ventersdorp, en eindig by die aansluiting by Pad 90.
1152	Die pad begin by die aansluiting by Provinsiale Pad P20-4 op die plaas Kaalfontein 212-I.P., strek in 'n westelike rigting oor die plase Vlakfontein 213-I.P. en Klipplaatdrift 224-I.P., distrik Ventersdorp, en eindig by die aansluiting by Pad 145.
1227	Die pad begin by die aansluiting by Pad 565 op die plaas Hartsfontein 216-H.O., strek in 'n algemene noordelike rigting oor die plase Langverwacht 196-H.O., Vaalboschbult 195-H.O., Grootlaagte 190-H.O., Zitland 171-H.O., Diamanddoorns 169-H.O., De Hoop 198-H.O., Makaauwkop 167-H.O., Zoetfontein 168-H.O., Nooitgedacht 144-H.O., Rosewood 390-I.O. en Rosalie 391-I.O., distrik Schweizer-Reneke, en eindig by die aansluiting by Pad 911.
1401	Die pad begin by die aansluiting by Pad 657 op die plaas Welverdiend 304-I.O., strek in 'n

Road	Description of Road
	it proceeds in a northerly direction over the farms Villiershoop 277-I.O., Leeuwpan 279-I.O., Wachteenbeetje 130-I.O., Vlakplaats 128-I.O. and Klippan 133-I.O., district of Delareyville, and ends at its junction with Road 1067.
1456	The road commences at its junction with Provincial Road P34-3 on the farm Jala Jala 10-H.O., from where it proceeds in a north-westerly direction over the farms Lot 25(9) and 29(8)-H.O., district of Schweizer-Reneke, and ends at its junction with Road 163.
2036	The road commences at its junction with Road 0175 on the farm Kromdraai 420-I.P., from where it proceeds in a north-easterly direction over the farms Uitval 418-I.P., Welgevonden 417-I.P., Town and Townlands of Potchefstroom 435-I.Q. and Harpington 461-I.Q., district of Potchefstroom, and ends at its junction with Road 1671.
2406	The road commences at its junction with Provincial Road P28-3 on the farm Vlakfontein 56-I.P., district of Lichtenburg, from where it proceeds in an easterly direction and ends at its junction with the "Halfpad" Railway siding.

Pad	Beskrywing van Pad
	noordelike rigting oor die plase Villiershoop 277-I.O., Leeuwpan 279-I.O., Wachteenbeetje 130-I.O., Vlakplaats 128-I.O. en Klippan 133-I.O., distrik Delareyville, en eindig by die aansluiting by Pad 1067.
1456	Die pad begin by die aansluiting by Provinsiale Pad P34-3 op die plaas Jala Jala 10-H.O., strek in 'n noordwestelike rigting oor die plase Lot 25(9) en 29(8)-H.O., distrik Schweizer-Reneke, en eindig by die aansluiting by Pad 163.
2036	Die pad begin by die aansluiting by Pad 0175 op die plaas Kromdraai 420-I.P., strek in 'n noordoostelike rigting oor die plase Uitval 418-I.P., Welgevonden 417-I.P., Town and Townlands of Potchefstroom 435-I.Q., en Harpington 461-I.Q., distrik Potchefstroom, en eindig by die aansluiting by Pad 1671.
2406	Die pad begin by die aansluiting by Provinsiale Pad P28-3 op die plaas Vlakfontein 56-I.P., distrik Lichtenburg, strek in 'n oostelike rigting en eindig by die aansluiting by die Halfpad-spoorweghalte.

No. 218 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the *Removal of Restrictions Act, 1967 (Act 84 of 1967)* to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby;

(1) in respect of Lot 1193, situate in Ferndale Township, district Johannesburg, held in terms of Deed of Transfer 37498/1970, remove condition (c); and

(2) amend Randburg Town-planning Scheme, 1976, by the rezoning of Lot 1193, Ferndale Township, from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 2 000 m²" and which amendment scheme will be known as Amendment Scheme 44, as indicated on the annexed Map 3 and the scheme clauses.

Given under my Hand at Pretoria this 10th day of August, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-14-2-465-5

RANDBURG TOWN-PLANNING SCHEME 1976.

RANDBURG AMENDMENT SCHEME 44.

The Randburg Town-planning Scheme, 1976, approved by virtue of Administrator's Notice 1746, dated 29 December, 1976, is hereby further amended and altered in the following manner:

The map, as shown on Map 3, Amendment Scheme 44.

No. 218 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967, (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem, te wysig, op te skort of op te hef;

So is dit dat ek;

(1) met betrekking tot Lot 1193, geleë in die dorp Ferndale, distrik Johannesburg, gehou kragtens Akte van Transport 37498/1970, voorwaarde (c) ophef; en

(2) Randburg-dorpsaanlegskema, 1976, wysig deur die hersonering van Lot 1193, dorp Ferndale, van "Spesiale Woon" met 'n digtheid van "Een woonhuis per erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 2 000 m²", welke wysigingskema bekend staan as Wysigingskema 44, soos aangedui op die bygaande Kaart 3 en die skemaklousules.

Gegee onder my Hand te Pretoria op hede die 10de dag van Augustus, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-14-2-465-5

RANDBURG-DORPSBEPLANNINGSKEMA 1976.

RANDBURG-WYSIGINGSKEMA 44.

Die Randburg-dorpsbeplanningskema, 1976, goedgekeur kragtens Administrateurskennisgewing 1746, gedateer 29 Desember 1976, word hiermee verder soos volg gewysig en verander:

Die kaart, soos aangetoon op Kaart 3, Wysigingskema 44.

KODE CODE 132 • RANDBURG DORPSBEPLANNINGSKEMA TOWN PLANNING SCHEME 1976 • KAART MAP 3 • B REEKS SERIES • WYSIGINGSKEMA AMENDMENT SCHEME 44 • VEL SHEET I VAN OF I VEL SHEET

SKAAL - SCALE 1: 2500

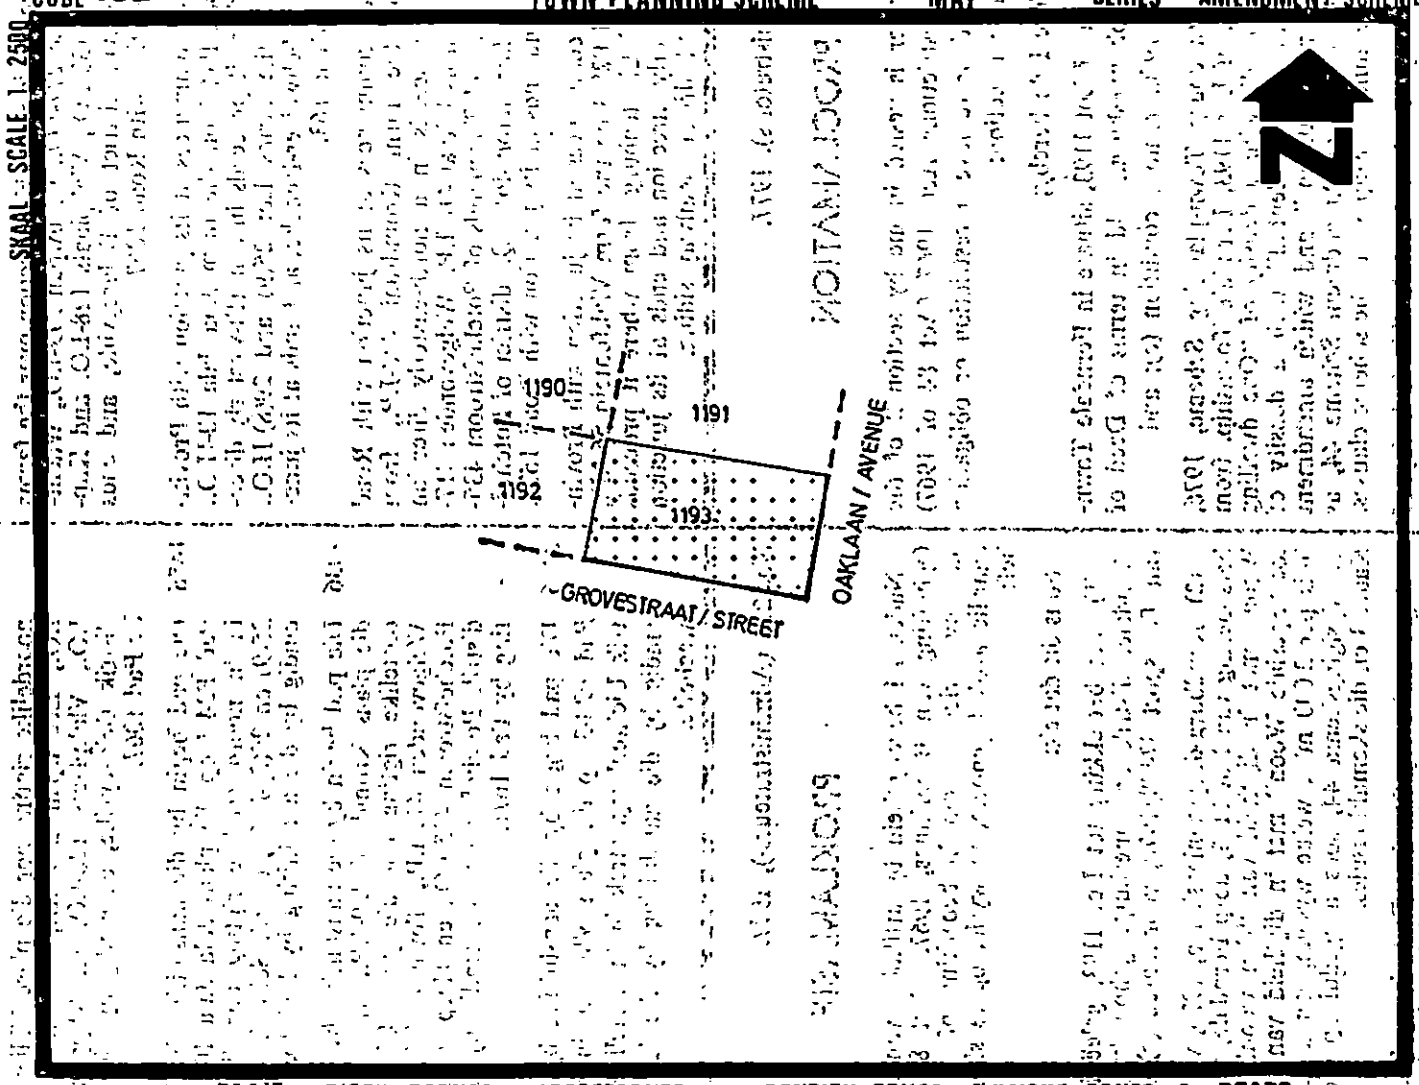

LOT 1193 DORP TOWNSHIP

FERNDALE

VERWYSING / REFERENCE

1 WOONHUIS DWELLING PER 2000m²

PAAIE, DIGTHEIDSONES & HOOGTESONES • DENSITY ZONES, HEIGHT ZONES & ROADS

KODE CODE 132 • RANDBURG DORPSBEPLANNINGSKEMA TOWN PLANNING SCHEME 1976 • KAART MAP 3 • A REEKS SERIES • WYSIGINGSKEMA AMENDMENT SCHEME 44 • VEL SHEET 1 VAN OF 1 VEL SHEET

SKAAL / SCALE 1:2500

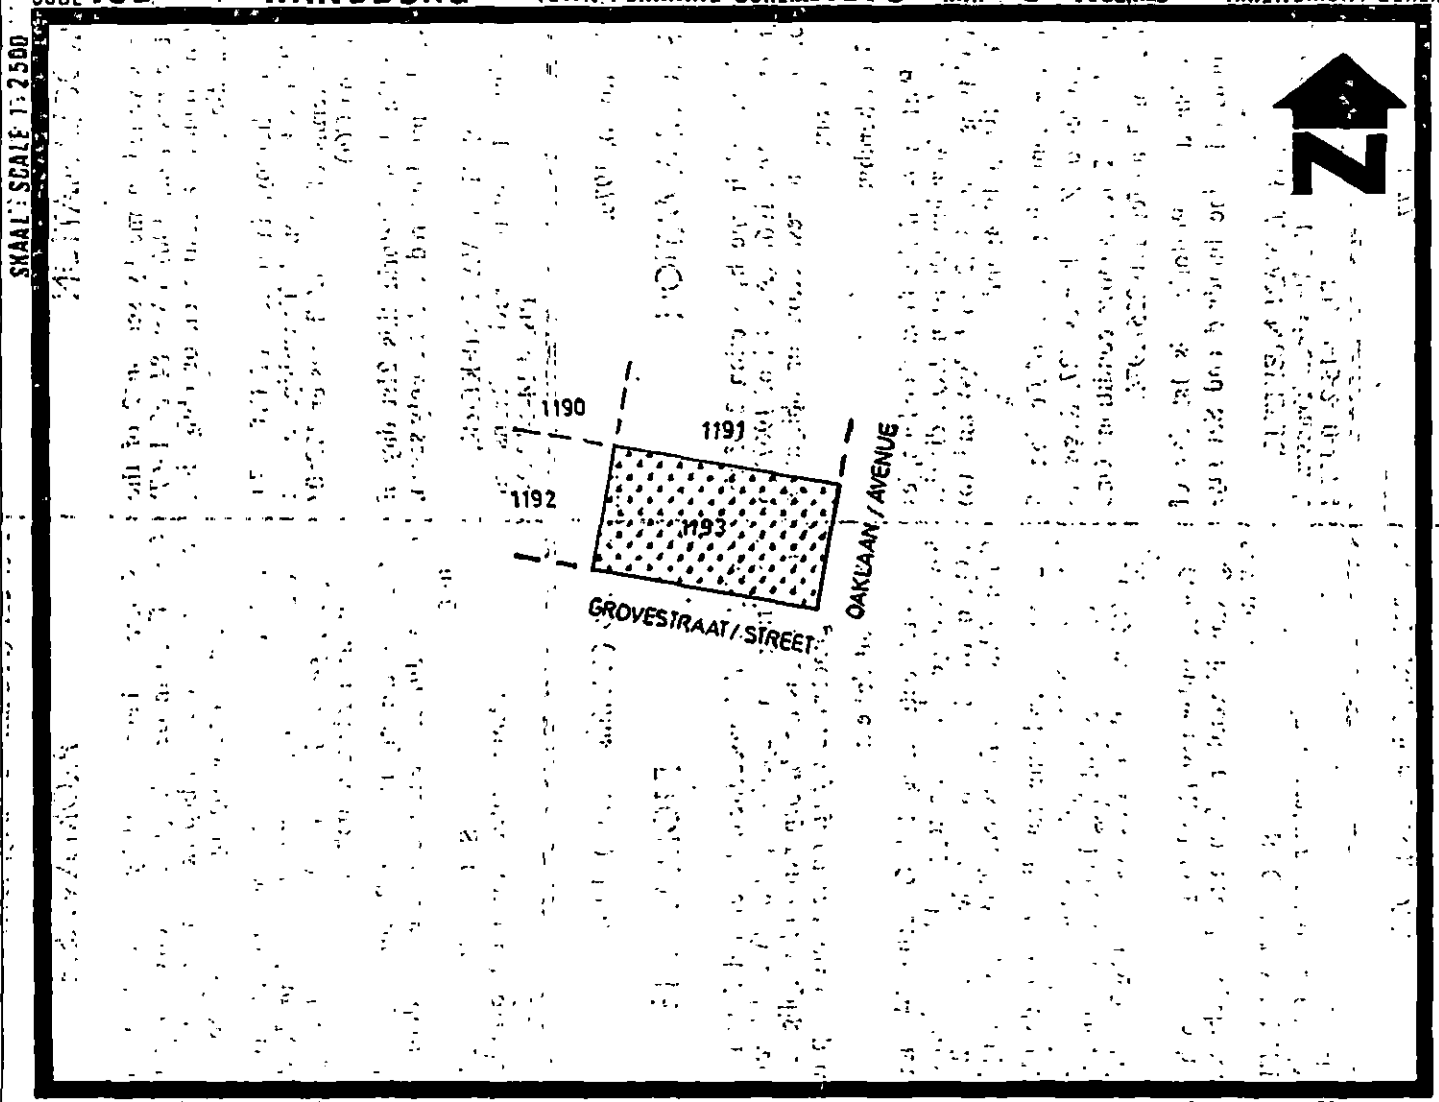

LOT 1193 : DORP TOWNSHIP

FERNDALE

VERWYSING / REFERENCE

RESIDENSIEËL 1
RESIDENTIAL

GEBRUIKSONES • USE ZONES

No. 217 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Erf 1070, situate in Three Rivers Extension 1 Township, district Vereeniging, held in terms of Deed of Transfer 17250/1965, remove condition C(a).

Given under my Hand at Pretoria this 21st day of June, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-14-2-1302-5

No. 217 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Erf 1070, geleë in die dorp Three Rivers Uitbreiding 1, distrik Vereeniging, gehou kragtens Akte van Transport 17250/1965, voorwaarde C(a) ophef.

Gegee onder my Hand te Pretoria, op hede die 21ste dag van Junie, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-14-2-1302-5

No. 219 (Administrator's), 1976.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby:

1. in respect of Portion 74 of the farm Roodekopjes or Zwartkopjes 427, Registration Division J.Q., district Brits, remove conditions Two, 1, 2 and 3(a) and (b) in Deed of Transfer T.19225/1974; and

2. in respect of the Remaining Extent of Portion 75 of the farm Roodekopjes or Zwartkopjes 427, Registration Division J.Q., district Brits, remove conditions One (a) and (b) in Deed of Transfer T.19225/1974.

Given under my Hand at Pretoria this 1st day of November, One thousand Nine hundred and Seventy-six.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-15-2-10-427-4

No. 219 (Administrateurs-), 1976.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek:

1. met betrekking tot Gedeelte 74 van die plaas Roodekopjes of Zwartkopjes 427, Registrasie Afdeling J.Q., distrik Brits, voorwaardes Twee 1, 2 en 3(a) en (b) in Akte van Transport T.19225/1974, ophef; en

2. met betrekking tot die Resterende Gedeelte van Gedeelte 75 van die plaas Roodekopjes of Zwartkopjes 427, Registrasie Afdeling J.Q., distrik Brits, voorwaardes Een (a) en (b) in Akte van Transport T.19225/1974, ophef.

Gegee onder my Hand te Pretoria, op hede die 1ste dag van November, Eenduisend Negehonderd Ses-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-15-2-10-427-4

No. 221 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Holding 32, situate in Simarlo Agricultural Holdings Extension 2, district Pretoria, held in terms of Deed of Transfer 22228/1967, remove condition (e)(iv).

Given under my Hand at Pretoria this 28th day of September, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-16-2-541-2

No. 221 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Hoewe 32, geleë in Simarlo Landbouhoewes Uitbreiding 2, distrik Pretoria, gehou kragtens Akte van Transport 22228/1967, voorwaarde (e)(iv) ophef.

Gegee onder my Hand te Pretoria, op hede die 28ste dag van September, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-16-2-541-2

No. 222 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Erf 151, situate in Casseldale Township, district Springs, held in terms of Deed of Transfer F.73/1973, alter condition 3 to read as follows:

"3. Buildings erected on the erf shall be located in such a position and at such a distance being not less than 3,05 metres from the street frontage or street boundary, and in such a manner as shall be agreed upon by the applicant company, provided that the dwelling which existed on the erf prior to 3 August, 1977, may not be less than 1,50 metres from the western boundary and not less than 1,20 metres from the northern boundary of the erf. No outbuildings may be erected on any street front."

Given under my Hand at Pretoria this 1st day of September, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-14-2-235-4

No. 222 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Erf 151, geleë in die dorp Casseldale, distrik Springs, gehou kragtens Akte van Transport F.73/1973, voorwaarde 3 wysig om soos volg te lees:

"3. Buildings erected on the erf shall be located in such a position and at such a distance being not less than 3,05 metres from the street frontage or street boundary, and in such a manner as shall be agreed upon by the applicant company, provided that the dwelling which existed on the erf prior to 3 August, 1977, may not be less than 1,50 metres from the western boundary and not less than 1,20 metres from the northern boundary of the erf. No outbuildings may be erected on any street front."

Gegee onder my Hand te Pretoria, op hede die 1ste dag van September, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-14-2-235-4

No. 220 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby;

(1) in respect of Lot 1169, situate in Ferndale Township, district Johannesburg, held in terms of Deed of Transfer 19552/1971, remove condition (c); and

(2) amend Randburg Town-planning Scheme, 1976 by the rezoning of Lot 1169, Ferndale Township, from "Special Residential" with a density of "One dwelling per erf" to "Special Residential" with a density of "One dwelling per 1 500 m²" and which amendment scheme will be known as Amendment Scheme 95, as indicated on the annexed Map 3 and the scheme clauses.

Given under my Hand at Pretoria this 12th day of July, One thousand Nine hundred and Seventy-seven.

D. S. VAN DER M. BRINK,
Deputy Administrator of the Province Transvaal.
PB. 4-14-2-465-8

RANDBURG TOWN-PLANNING SCHEME, 1976.

AMENDMENT SCHEME 95.

The Randburg Town-planning Scheme, 1976, approved by virtue of Administrator's Notice 1746, dated 29 December, 1976, is hereby further amended and altered in the following manner:

The map, as shown on Map 3, Amendment Scheme 95.

No. 220 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967, (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem, te wysig, op te skort of op te hef;

So is dit dat ek;

(1) met betrekking tot Lot 1169, geleë in dorp Ferndale, distrik Johannesburg gehou kragtens Akte van Transport 19552/1971, voorwaarde (c) ophef; en

(2) Randburg-dorpsaanlegskema, 1976, wysig deur die hersonering van Lot 1169, dorp Ferndale, van "Spesiale Woon" met 'n digtheid van "Een woonhuis per erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1 500 m²", welke wysigingskema bekend staan as Wysigingskema 95, soos aangedui op die bygaande Kaart 3 en die skemaklousules.

Gegee onder my Hand te Pretoria op hede die 12de dag van Julie, Eenduisend Negehonderd Sewe-en-sewentig.

D. S. VAN DER M. BRINK,
Wnde. Administrateur van die Provinsie Transvaal.
PB. 4-14-2-465-8

RANDBURG-DORPSBEPLANNINGSKEMA, 1976.

WYSIGINGSKEMA 95.

Die Randburg-dorpsbeplanningskema, 1976, goedgekeur kragtens Administrateurskennisgewing 1746, gedateer 29 Desember 1976, word hiermee verder soos volg gewysig en verander:

Die kaart, soos aangetoon op Kaart 3, Wysigingskema 95.

KODE CODE 132 • RANDBURG DORPSBEPLANNINGSKEMA TOWN PLANNING SCHEME 1976 • KAART MAP 3 • A REEKS SERIES • WYSIGINGSKEMA AMENDMENT SCHEME 95 • VEL SHEET 1 VAN OF 1 VELLE SHEETS

SKAAL SCALE 1:2500

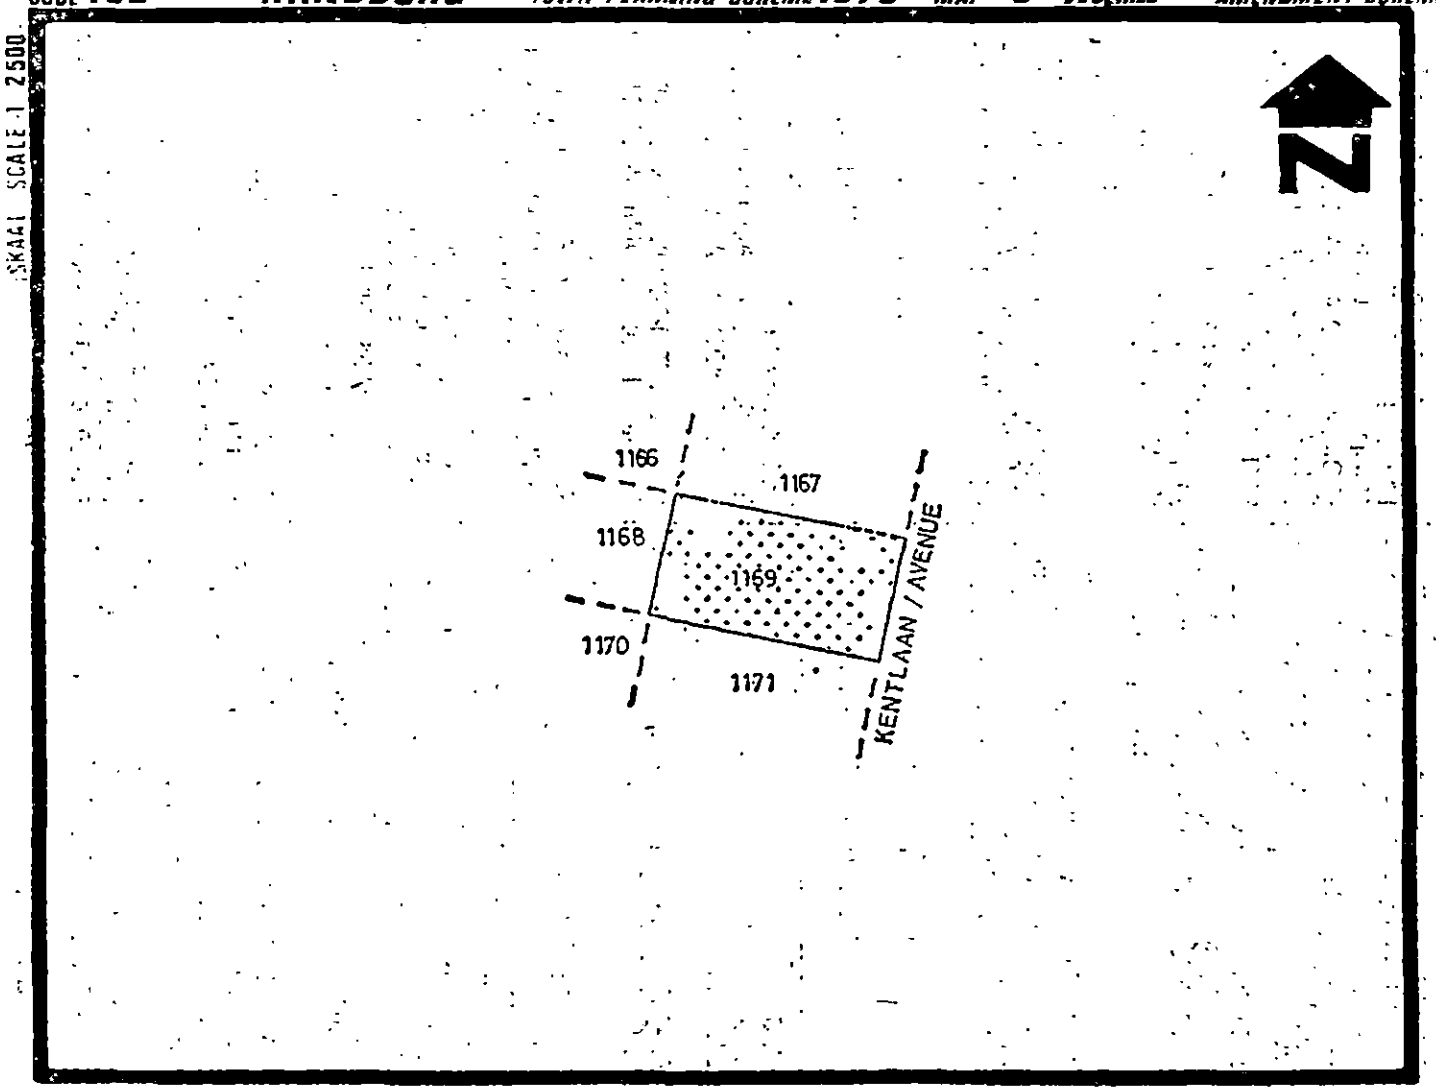

LOT 1169
FERNDALE DORP TOWNSHIP

VERWYSING / REFERENCE

RESIDENSIEEL 1 RESIDENTIAL 1

GEBRUIKSONES • USE ZONES

KODE CODE 132 • RANDBURG • DORPSBEPLANNINGSKEMA TOWN PLANNING SCHEME 1976 • KAART MAP 3 • B REEKS SERIES • WYSIGINGSKEMA AMENDMENT SCHEME 95 • VEL SHEET 1 VAN OF 1 VELLE SHEETS

SKAAL SCALE 1 : 2500

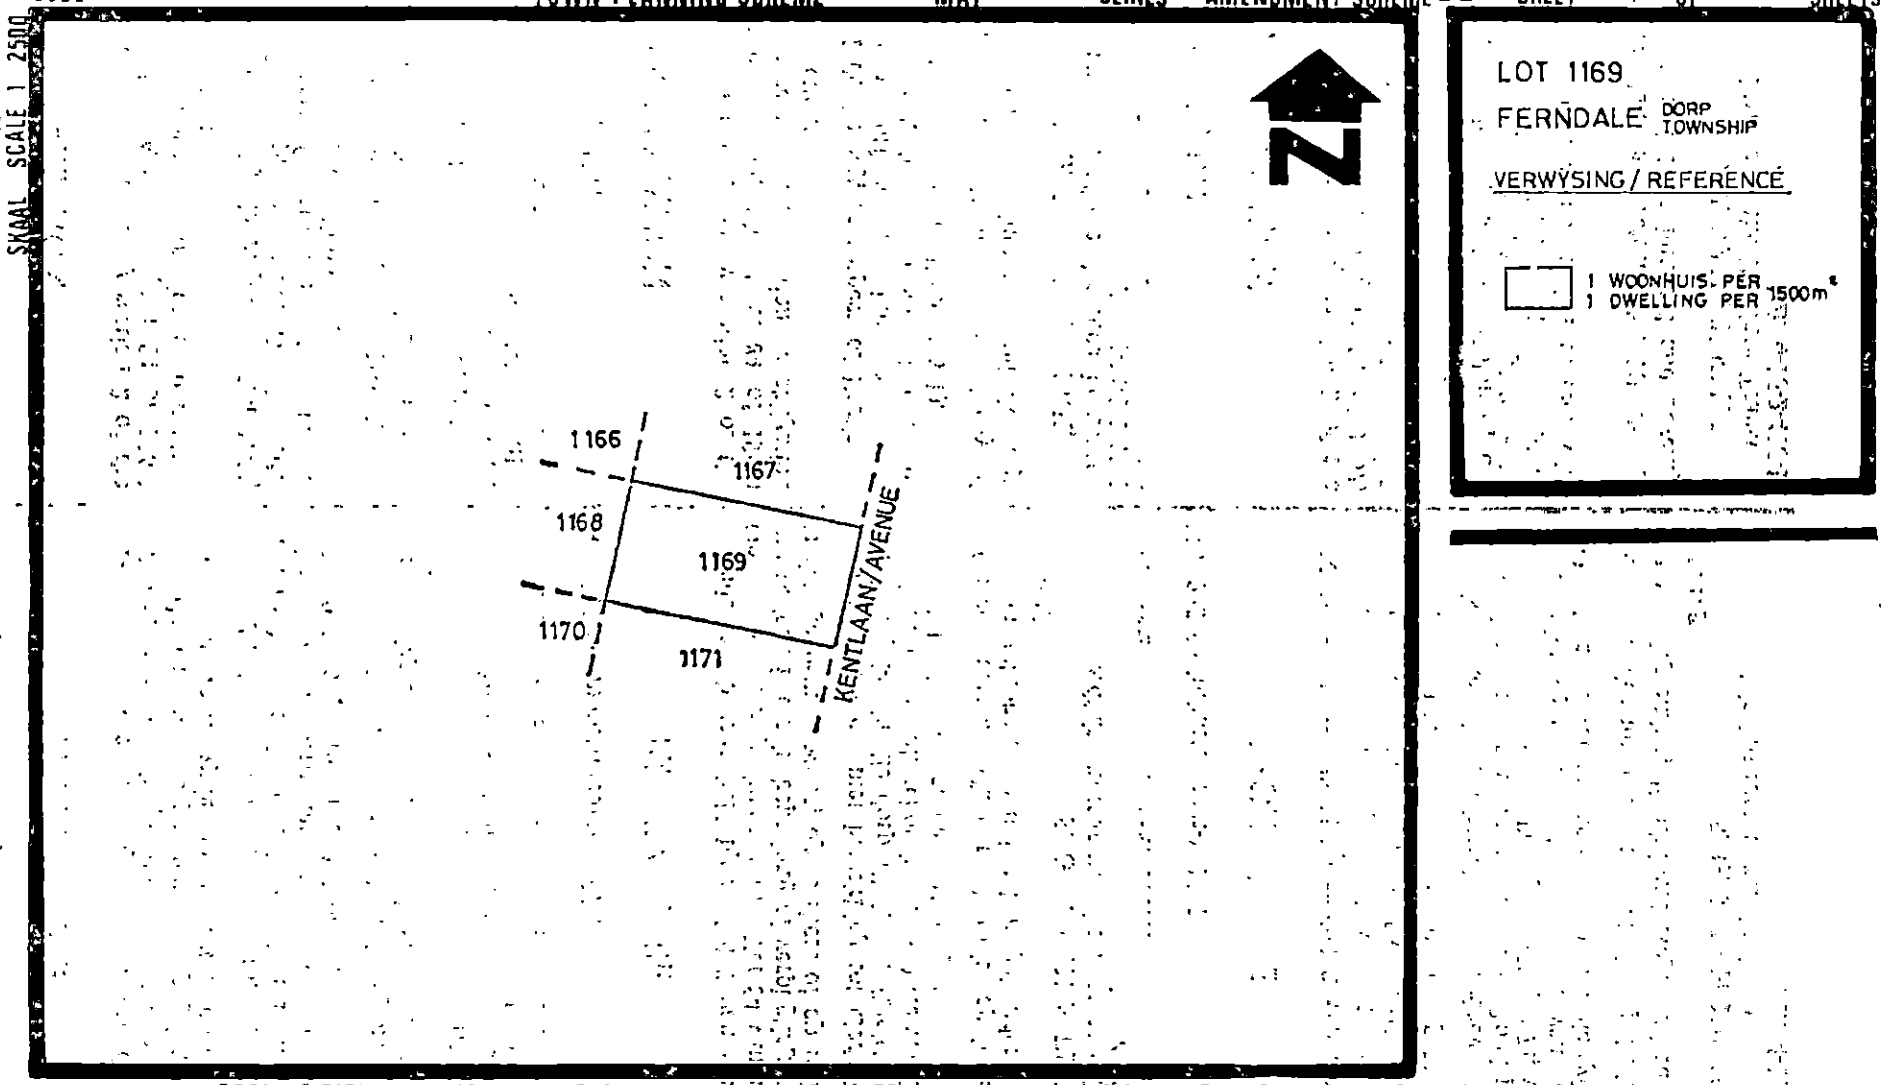

PAAIE , DIGTHEIDSONES & HOOGTESONES • DENSITY ZONES , HEIGHT ZONES & ROADS

No. 223 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Lot 1243, situate in Yeoville Township, Registration Division I.R., Transvaal, held in terms of Certificate of Consolidated Title T.22850/1976, remove condition A.3.

Given under my Hand at Pretoria this 21st day of September, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-14-2-1501-5

No. 223 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Lot 1243, geleë in dorp Yeoville, Registrasie Afdeling I.R., Transvaal, gehou kragtens Sertifikaat van Gekonsolideerde Titel T.22850/1976, voorwaarde A.3 ophef.

Gegee onder my Hand te Pretoria, op hede die 21ste dag van September, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-14-2-1501-5

No. 224 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a restriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Portion 1 of Erf 246, situate in Eloffsdal Township, Registration Division J.R., Transvaal, held in terms of Deed of Transfer T.29997/1975, remove condition 2.A(1).

Given under my Hand at Pretoria this 3rd day of October, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-14-2-2072-1

No. 224 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Gedeelte 1 van Erf 246, geleë in die dorp Eloffsdal, Registrasie Afdeling J.R., Transvaal, gehou kragtens Akte van Transport T.29997/1975, voorwaarde 2.A(1) ophef.

Gegee onder my Hand te Pretoria, op hede die 3de dag van Oktober, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-14-2-2072-1

No. 225 (Administrator's), 1977.

PROCLAMATION

Whereas power is vested in me by section 2 of the Removal of Restrictions Act, 1967 (Act 84 of 1967) to alter, suspend or remove a resctriction or obligation referred to in that section;

Now therefore I do hereby, in respect of Holding 476, situate in Northriding Agricultural Holdings, district Roodepoort, held in terms of Deed of Transfer 9597/1972, alter condition 2(d)(iv) by the removal of the figures "30,48" and the substitution thereof with the figures "14".

Given under my Hand at Pretoria this 7th day of September, One thousand Nine hundred and Seventy-seven.

S. G. J. VAN NIEKERK,
Administrator of the Province Transvaal.
PB. 4-16-2-416-13

No. 225 (Administrateurs-), 1977.

PROKLAMASIE

Nademaal bevoegdheid by artikel 2 van die Wet op Opheffing van Beperkings, 1967 (Wet 84 van 1967) aan my verleen is om 'n beperking of verpligting in daardie artikel genoem te wysig, op te skort of op te hef;

So is dit dat ek, met betrekking tot Hoewe 476, geleë in Northriding Landbouhoewes, distrik Roodepoort, gehou kragtens Akte van Transport 9597/1972, voorwaarde 2(d)(iv) wysig deur die skrapping van die syfers "30,48" en die vervanging daarvan met die syfers "14".

Gegee onder my Hand te Pretoria, op hede die 7de dag van September, Eenduisend Negehonderd Sewe-en-sewentig.

S. G. J. VAN NIEKERK,
Administrateur van die Provinsie Transvaal.
PB. 4-16-2-416-13

ADMINISTRATOR'S NOTICES

Administrator's Notice 1546 19 October, 1977

BARBERTON MUNICIPALITY: ADOPTION OF STANDARD BY-LAWS RELATING TO CAFES, RESTAURANTS AND EATING-HOUSES.

1. The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes that the Town Council of Barberton has, in terms of section 96*bis*(2) of the said Ordinance, adopted without amendment the Standard By-laws Relating to Cafes, Restaurants and Eating-houses, published under Administrator's Notice 492, dated 27 April 1977, as by-laws made by the said Council.

2. Chapter 10 of the Public Health By-laws of the Barberton Municipality, published under Administrator's Notice 148, dated 21 February, 1951, as amended, is hereby deleted.

PB. 2-4-2-22-5

Administrator's Notice 1547 19 October, 1977

CORRECTION NOTICE.

TOWN COUNCIL OF BRAKPAN: WITHDRAWAL OF EXEMPTION FROM RATING.

Administrator's Notice 1382 dated 21 September, 1977, is hereby corrected by the substitution in the first paragraph in the sixth and seventh lines for the expression "Witbank Estates" of the expression "Withok Estates".

PB. 3-5-11-2-9

Administrator's Notice 1548 19 October, 1977

BEDFORDVIEW MUNICIPALITY: FLAMMABLE LIQUIDS AND SUBSTANCES BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

INDEX.

Section.

1	Definitions .....
2 — 53	General .....
54 — 59	Stores .....
60 — 69	Bulk Depots .....
70 — 80	Transport of Flammable Liquid
81 — 95	Dry-cleaning Rooms: General .....
96 — 98	Special Provisions where Class A Flammable Liquids are used for Dry-cleaning .....

ADMINISTRATEURSKENNISGEWINGS

Administrateurskennisgewing 1546 19 Oktober 1977

MUNISIPALITEIT BARBERTON: AANNAME VAN STANDAARDVERORDENINGE BETREFFENDE KAFEES, RESTAURANTE EN EETHUISE.

1. Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Stadsraad van Barberton die Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise, afgekondig by Administrateurskennisgewing 492 van 27 April 1977, ingevolge artikel 96*bis*(2) van genoemde Ordonnansie sonder wysiging aangeneem het as verordeninge wat deur genoemde Raad opgestel is.

2. Hoofstuk 10 van die Publieke Gesondheidsverordeninge van die Munisipaliteit Barberton, afgekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, soos gewysig, word hierby geskrap.

PB. 2-4-2-22-5

Administrateurskennisgewing 1547 19 Oktober 1977

KENNISGEWING VAN VERBETERING.

STADSRAAD VAN BRAKPAN: INTREKKING VAN VRYSTELLING VAN EIENDOMSBELASTING.

Administrateurskennisgewing 1382 van 21 September 1977, word hierby verbeter deur in die eerste paragraaf in die sewende reël die uitdrukking "Witbank Estates" deur die uitdrukking "Withok Estates" te vervang.

PB. 3-5-11-2-9

Administrateurskennisgewing 1548 19 Oktober 1977

MUNISIPALITEIT BEDFORDVIEW: VLAMBARE VLOEISTOWWE EN STOWWE VERORDENINGE.

Die Administrateur publiseer ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

INHOUDSOPGAWE.

Artikel

1	Woordomskrywing .....
2 — 53	Algemeen .....
54 — 59	Pakkamers .....
60 — 69	Grootmaatdepots .....
70 — 80	Vervoer van Vlambare Vloeistowwe .....
81 — 95	Droogskoonmaaklokale: Algemeen .....
96 — 98	Spesiale Maatreëls waar Vlambare Vloeistowwe Klas A vir Droogskoonmaakdoeleindes gebruik word

99 — 100 Special Provisions where Class B Flammable Liquid is used for Dry-cleaning

101 — 105 Spray Rooms

106 — 108 Mixing Rooms

109 Liquified Petroleum Gases

110 Gas-filled Toys

111 — 124 Carbide

125 Offences and Penalties

Definitions.

1. For the purpose of these by-laws, unless the context indicates otherwise —

"above ground storage tank" means a tank situated above or partly above the ground and used or intended to be used for the storage of flammable liquid;

"authorized officer" means any officer of the Council acting within the scope of his duties;

"boundary line" means the perimeter of any premises in or on which flammable liquid is stored or used;

"bulk depot" means any premises used or intended to be used for the storage in bulk of flammable liquid whence flammable liquid is to be distributed mainly by road tank wagon or otherwise, and also includes any premises for the storage in bulk of packed products;

"bulk store" means any building or structure used or intended to be used in a bulk depot for the storage of flammable liquid in portable containers;

"carbide" means carbide of calcium;

"certificate of registration" means a certificate issued by the Council authorizing any person to use the premises therein specified either for the storage, use or handling of flammable liquid or for the storage of flammable substances, as the case may be;

"Chief Fire Officer" means the Chief Fire Officer of the Council, or in his absence, the person acting as Chief Fire Officer;

"container" means any case, tin, barrel, drum or other vessel used or intended to be used for the holding of flammable liquids but shall not include the fuel tank of a motor vehicle or stationary engine in normal use as such;

"Council" means the Village Council of Bedfordview and includes the management committee of that Council or any officer employed by the Council, acting by virtue of any power vested in the Council in connection with these by-laws and delegated to him in terms of section 58 of the Local Government (Administration and Elections) Ordinance, 1960 (Ordinance 40 of 1960);

"dry-cleaning machinery" means any machinery used or intended to be used for the cleaning or treatment of garments or textiles with the aid of flammable liquid;

99 — 100 Spesiale Maatreëls waar Vlambare Vloeistowwe Klas B vir Droogskoonmaakdoeleindes gebruik word

101 — 105 Spuitlokale

106 — 108 Menglokale

109 Vloeibare Petroleumgas

110 Speelgoed wat met Gas gevul is

111 — 124 Karbied

125 Oortredings en Boetes

Woordomskrywing.

1. Vir die toepassing van hierdie verordeninge, tensy die sinsverband anders aandui, beteken —

"beskermde gebou" enige huis of gebou of ander bouwerk wat gebruik word of bedoel is om gebruik te word, of beskikbaar is vir menslike bewoning of openbare byeenkomste, en sluit skole, klubs en soortgelyke inrigtings in en omvat ook geboue of strukture vir die huisvesting van diere, maar sluit nie administrasiekantore, kleedkamers of eetlokale in 'n grootmaatdepot in nie;

"bewoonbare vertrek" 'n vertrek wat gebou of ingerig is om as woonkamer of werkkamer te dien, en sluit winkels, werkwinkels en kantore in, en die uitdrukking "woonvertrek" beteken dieselfde;

"bogrondse opbergtenk" 'n tenk wat op of gedeeltelik bokant die grond geleë is, en wat gebruik word om vlambare vloeistof in op te berg, of wat bedoel is om as sodanig gebruik te word;

"Brandweerhoof" die Brandweerhoof van die Raad, of in sy afwesigheid, die persoon wat as waarnemende brandweerhoof optree;

"droogskoonmaaklokaal" 'n lokaal of bouwerk wat gebruik word of bedoel is om gebruik te word om vir wins of teen vergoeding kledingstukke of tekstielware met behulp van vlambare vloeistof skoon te maak of te behandel;

"droogskoonmaakmasjinerie" enige masjinerie wat gebruik word of bedoel is om gebruik te word om kledingstukke of tekstielware met behulp van vlambare vloeistof skoon te maak of te behandel;

"gemagtigde beampte" 'n beampte van die Raad handelende binne die bestek van sy werksaamhede;

"geregistreerde perseel" 'n perseel deur die Raad kragtens hierdie verordeninge geregistreer vir die opberg van vlambare vloeistowwe en stowwe;

"grenslyn" die omtrek van 'n perseel waarop of waarin vlambare vloeistowwe of stowwe opgeberg of gebruik word;

"grootmaatdepot" 'n perseel wat gebruik word, of bedoel is om gebruik te word, vir die opberging by die grootmaat van vlambare vloeistowwe en vanwaar vlambare vloeistowwe, hoofsaaklik deur middel van padtenkvoertuie of op 'n ander wyse, versprei word;

"grootmaatpakhuis" 'n gebou of bouwerk in 'n grootmaatdepot wat gebruik word of bedoel is om gebruik te word om vlambare vloeistof in draagbare houers op te berg;

"houer" 'n kis, blik, vaatjie, drom of 'n ander vat wat gebruik word of bedoel is om gebruik te word om

"dry-cleaning room" means any room or structure used or intended to be used for the cleaning or treatment for gain or reward of garments or textiles with the aid of flammable liquid;

"flammable liquids" —

'Class A flammable liquid' means any flammable liquid having a true flash-point of 23°C and lower;

'Class B flammable liquid' means any flammable liquid having a true flash-point of over 23°C up to and including 55°C.

'Class C flammable liquid' means any liquid, oil or other similar substance having a true flash-point of more than 55°C but under 90°C.

For the purposes of the definition of "flammable liquids", flash-point shall be determined in accordance with the definition contained in the Code of Practice for the Petroleum Industry SABS 089 : Part I - 1966;

"habitable room" means a room constructed or adapted to be used as a living room or workroom and includes shops, workshops and offices, and the term "habitable" shall have a like meaning;

"liquid petroleum gas" means a gas, being a petroleum by-product which, when stored under pressure in cylinders, assumes a liquid state until the pressure has been reduced;

"mixing room" means any room or structure used or intended to be used for the manufacture or preparation of any product involving the use of flammable liquid;

"person" includes any individual, company or corporate body or partnership or other association of persons;

"protected work" means any house or building or other structure used or intended to be used or available for use for human habitation or public assembly and any school, club or similar institution and the building or structure housing animals, but shall not include any administrative office, change room or mess room in a bulk depot;

"pump" means any pump used or intended to be used for the supply, delivery, propulsion or pumping of flammable liquid or substances and includes all apparatus, pipes and appliances used for or in connection therewith, but shall not include pumps in bulk depots;

"registered premises" means premises registered by the Council in terms of these by-laws for the storage of flammable liquids and substances;

"road tank wagon" means a vehicle constructed and intended for the purpose of conveying flammable liquid for distribution principally or solely in a tank constructed as part of and firmly attached to such vehicle;

"spray booth" means any separate compartment constructed of metal and erected inside an existing building or any subdivision of any spray room when such subdivision or separate compartment is used or invlambare vloeistof in te hou maar sluit nie die brandstoftenk van 'n motorvoertuig of van 'n vasstaande masjien in normale gebruik as sodanig in nie;

"karbied" kalsiumkarbied;

"lugpypie" 'n pypie wat gemaak en aangebring is ten einde die dampe van vlambare vloeistof in die atmosfeer te laat ontsnap;

"menglokaal" enige lokaal of bouwerk wat gebruik word of bedoel is om gebruik te word vir die vervaardiging of voorbereiding van enige produk waarby die gebruik van vlambare vloeistowwe betrek word;

"ondergrondse opbergtenk" 'n tenk wat gebruik word of bedoel is om gebruik te word om vlambare vloeistof in op te berg en wat heeltemal in die grond ingelaat, en met grond of soliede rots omring is, of 'n tenk wat in 'n kelderverdieping onderkant die grondvlak geleë en omring is deur vloeistofdigte beton of steenwerk en geheel en al met 'n sandomhulling omring is;

"padtenkvoertuig" 'n voertuig wat gebou en bedoel is om vlambare vloeistof, hoofsaaklik of uitsluitend in 'n tenk wat as deel van sodanige voertuig, en stewig daaraan vasgebou is, vir verspreidingsdoeleindes te vervoer;

"pakkamer" 'n gebou of bouwerk, uitgesonderd 'n grootmaatpakhuis, wat gebruik word of bedoel is om gebruik te word om vlambare vloeistof in houers daarin op te berg;

"persoon" ook enige individu, maatskappy of liggaam met regspersoonlikheid, of 'n vennootskap, of ander vereniging van persone;

"pomp" enige pomp wat vir die voorsiening, lewering, voortdrywing of pomp van vlambare vloeistof of stowwe gebruik word, of wat vir sodanige gebruik bedoel is, en sluit alle apparate, pype en toestelle in wat daarvoor of in verband daarmee gebruik word, maar sluit nie pompe in grootmaatdepots in nie;

"Raad" die Dorpsraad van Bedfordview en omvat die bestuurskomitee van daardie Raad of enige beampte deur die Raad in diens geneem, handelende uit hoofde van enige bevoegdheid wat in verband met hierdie verordeninge aan die Raad verleen is en wat ingevolge artikel 58 van die Ordonnansie op Plaaslike Bestuur (Administrasie en Verkiesings), 1960 (Ordonnansie 40 van 1960), aan hom gedelegeer is;

"registrasiesertifikaat" 'n sertifikaat wat deur die Raad uitgereik is, waarby iemand gemagtig word om die persele wat daarin aangegee word vir die opberg, gebruik of hantering van vlambare vloeistowwe of die opberg van vlambare stowwe na gelang van die geval, te gebruik;

"spuithokkie" enige afsonderlike kompartement van metaal, gebou, en binne 'n bestaande lokaal ingerig of enige onderverdeling van 'n spuitlokaal indien so 'n kompartement of onderverdeling gebruik word of bedoel is om gebruik te word om voertuie of artikels met vlambare vloeistof te bespuit, en vir doeleindes wat daarmee gepaard gaan;

"spuitlokaal" 'n lokaal of bouwerk wat gebruik word of bedoel is om gebruik te word om voertuie of artikels met vlambare vloeistof te bespuit, en vir doeleindes wat daarmee gepaard gaan;

tended to be used for the purpose of spraying vehicles or articles with flammable liquid, and purposes incidental thereto;

"spray permit" means a permit issued by the Council authorizing any person to carry out the spraying of any article or thing with flammable liquid inside a building;

"spray room" means any room or structure used or intended to be used for the purpose of spraying vehicles or articles with flammable liquid and purposes incidental thereto;

"store" means any building or structure, other than a bulk store, which is used or intended to be used for the storage of flammable liquid in containers;

"tank" means a metal tank of adequate strength for the use intended, used or intended to be used for the storage of flammable liquid;

"transfer under seal" means the transfer of flammable liquid from or to a road tank wagon in such manner as to prevent the escape of flammable liquid or its vapour at any point in the system, except at such points where the vapour necessarily expelled is discharged through a vent pipe;

"transport permit" means a permit authorizing the transportation by road of flammable liquid;

"underground storage tank" means a tank used or intended to be used for the storage of flammable liquid wholly sunk in and surrounded by earth or solid rock or any such tank situated in a basement below ground level and totally enclosed by a liquid-tight concrete or brick structure, and wholly surrounded by a sand filling;

"vent pipe" means a pipe constructed and installed to allow the escape of flammable liquid vapour into the atmosphere.

GENERAL.

Provision of other By-laws to Apply.

2. The provisions of these by-laws shall be in addition to, and not in substitution for, any other by-laws of the Council.

Application of these By-laws to Existing Premises.

3. The provisions of sections 34, 35, 37, 40, 41, 44, 56, 62, 65(a), 76, 81(2), 96(a), (b), (c), (e), (f) and (g), 99(a) and (c), and 103(a) and (d) shall not apply to any premises now in lawful use for the storage, use or handling of flammable liquid so as to require such premises to be reconstructed, altered or added to, to conform to the provisions thereof, but where any such premises or part thereof are reconstructed, altered or added to, such work shall be carried out in conformity with the provisions of these by-laws: Provided that on change of control or ownership of any premises in lawful use for the storage, use or handling of flammable liquid, no renewal of any certificate of registration issued in connection therewith shall be made, unless and until the provisions of sections hereinbefore mentioned have been complied with, and the provisions of such sections shall thereafter apply to such premises.

Application for the Approval of Plans.

4.(1) Every application for approval of plans shall be made in writing to the Council.

"spuitpermit" 'n permit wat die Raad uitreik en waarby iemand gemagtig word om enige artikel of ding in 'n gebou met vlambare vloeistowwe te bespuit;

"tenk" 'n metaaltenk van voldoende sterkte vir die beoogde doel, wat gebruik word, of bedoel is om gebruik te word, vir die opberg van vlambare vloeistof;

"verseëlde oorplasing" die oorplasing van vlambare vloeistof van of na 'n padtenkvoertuig op so 'n wyse dat die ontsnapping van vlambare vloeistof of die dampe daarvan op enige punt in die oorplasingstelsel voorkom word, uitgesonderd op sodanige punt waar dampe wat noodwendig vrygestel word, deur 'n lugpyp uitgelaat word;

"vervoerpermit" 'n permit waarkragtens vlambare vloeistof per pad vervoer mag word;

"vlambare vloeistowwe" —

'vlambare vloeistof Klas A' enige vlambare vloeistof waarvan die flitspunt 23°C en laer is;

'vlambare vloeistof Klas B' enige vlambare vloeistof waarvan die flitspunt hoër is as 23°C, tot en met 55°C;

'vlambare vloeistof Klas C' enige vloeistof, olie of soortgelyke stof met 'n flitspunt wat hoër as 55°C, maar laer is as 90°C;

Vir die toepassing van die woordomskrywing van "vlambare vloeistowwe", word flitspunt bepaal ooreenkomstig die definisie daarvan vervat in die Gebruikskode vir die Petroleumnywerheid SABS 089: Deel I — 1966;

"vloeibare petroleum-gas" 'n petroleum neweproduk wat, indien dit onder druk in silinders gestoor is, 'n vloeibare toestand aanneem totdat die druk verminder word.

ALGEMEEN.

Bepalings van ander Verordeninge is van Toepassing.

2. Die bepalings van hierdie verordeninge is ter aanvulling van, en nie ter vervanging van enige ander verordeninge van die Raad nie.

Toepassing van hierdie Verordeninge op Bestaande Perseele.

3. Die bepalings van artikels 34, 35, 37, 40, 41, 44, 56, 62, 65(a), 76, 81(2), 96(a), (b) (c), (e), (f) en (g), 99(a) en (c) en 103(a) en (d) is nie op enige perseel wat tans wettiglik vir die opberg, gebruik of hantering van vlambare vloeistowwe gebruik word, op so 'n wyse van toepassing dat dit meebring dat sodanige perseel herbou, verbou of uitgebrei moet word ten einde aan die bepalings daarvan te voldoen nie, maar wanneer sodanige perseel of 'n gedeelte daarvan herbou, verbou of uitgebrei word, moet sodanige werk ooreenkomstig die bepalings van hierdie verordeninge verrig word: Met dien verstande dat indien 'n perseel wat wettiglik vir die opberg, gebruik of hantering van vlambare vloeistowwe gebruik word, van beheer of eienaar verwissel, geen registrasiesertifikaat in verband daarmee uitgereik, hernieu word nie, tensy en alvorens aan die bepalings van bogenoemde artikels voldoen is, en die bepalings van vermelde artikels is dan op sodanige perseel van toepassing.

Aansoek om Goedkeuring van Planne.

4.(1) Elke aansoek om goedkeuring van planne, moet skriftelik by die Raad gedoen word.

(2) Every such application shall be accompanied by a plan of the premises in respect of which a certificate is required, drawn to a scale of not less than 1:100, which shall specify —

(a) the premises including their elevation with regard to adjacent buildings or structures above or below the ground; the inside dimensions shown in figures of any room, building, structure or storage tank in which flammable liquid is to be stored, used or handled, as well as a description of the material to be used with which such room, building, structure or storage tank is or is proposed to be constructed; and

(b) full particulars including position of any pump, storage tank, store, mixing room, pipe-line, dry-cleaning machinery, spray room, spray booth, or ventilating equipment.

(3) Every such application shall also be accompanied by a block plan of such premises, drawn to a scale of not less than 1:500, which shall specify —

(a) the premises and all open spaces with stand numbers thereof and the materials of which such premises are constructed or are to be constructed;

(b) the stands with numbers thereof immediately adjoining;

(c) the names of any streets on which the site abuts and the township in which it is situated; and

(d) the north point.

(4) Where the plan relates to existing premises in respect of which a certificate of registration has been issued and wherein it is proposed to make alterations or additions to any apparatus lawfully used or intended to be used thereon for the storage or handling of flammable liquid, only a ground plan together with such application form and the prescribed charges shall be submitted. Such ground plan shall be drawn to a scale not less than 1:100 and shall show such additions or alterations in relation to such existing premises or apparatus.

(5) All plans shall be —

(a) signed by the owner or his agent;

(b) drawn in Indian ink on tracing linen or clear prints on cloth with white ground; and

(c) coloured with fixed colours as follows:

(i) *Block Plan:*

Proposed premises: Red.

Other existing buildings: Grey or a natural colour.

Open spaces: Uncoloured.

(ii) *Other Plans:*

Ventilation ducts, trunks or enclosures: Blue.

Storage tanks, pumps, pipe-lines, dry-cleaning machinery and spray booths: Red.

Buildings in which flammable liquid is to be stored, used or handled: Uncoloured.

Other existing buildings where required: Grey or a natural colour.

(2) Elke sodanige aansoek moet vergesel gaan van 'n plan van die perseel ten opsigte waarvan 'n sertifikaat vereis word, en moet volgens 'n skaal van minstens 1:100 geteken wees, en die volgende in besonderhede aandui:

(a) Die perseel, insluitende die opstand daarvan met betrekking tot aangrensende geboue of bouwerke bo of onder die grond, die binne-afmetings in syfers aangegee van enige vertrek, gebou, bouwerk of opbergtenk waarin vlambare vloeistof opgeberg, gebruik of gehanteer moet word, asook 'n beskrywing van die materiale waarmee sodanige vertrek, gebou, bouwerk of opbergtenk gebou is, of gebou gaan word; en

(b) volledige besonderhede, insluitende die terreinligging van enige pomp, opbergtenk, pakkamer, menglokaal, pypleiding, droogskoonmaakmasjinerie, spuitlokaal, spuithokkie of ventilasietoerusting.

(3) Elke sodanige aansoek moet ook vergesel gaan van 'n blokplan van sodanige perseel volgens 'n skaal van minstens 1:500 geteken en waarop die volgende gespesifiseer moet word:

(a) Die perseel en alle oop ruimtes en die standplaasnommers daarvan asook die materiaal waarvan sodanige persele gebou is of gebou gaan word;

(b) die direk aangrensende standplase en hul nommers;

(c) die name van strate waaraan die terrein grens en die naam van die dorp waarin dit geleë is; en

(d) die noordpunt.

(4) Indien die plan betrekking het op bestaande persele ten opsigte waarvan 'n registrasiesertifikaat uitgereik is, en ten opsigte waarvan dit die voorneme is om veranderings of toevoegings aan te bring aan 'n apparaat wat in verband met die opberg of hantering van vlambare vloeistowwe wettiglik daarop gebruik word of wat bedoel is om daarop te gebruik, moet daar slegs 'n grondplan en die voorgeskrewe gelde saam met so 'n aansoekvorm ingedien word. So 'n grondplan moet volgens 'n skaal van minstens 1:100 geteken word, en moet sodanige toevoegings of veranderings met betrekking tot die bestaande perseel of apparaat aandui.

(5) Alle planne moet —

(a) deur die eienaar of sy agent onderteken word;

(b) met Indiese ink op natreklinne geteken of duidelik op 'n wit doek afgedruk wees; en

(c) soos volg met vaste kleure ingekleur wees:

(i) *Blokplan:*

Voorgestelde perseel: Rooi.

Ander bestaande geboue: Grys of 'n neutrale kleur.

Oop ruimtes: Ongekleurd.

(ii) *Ander Planne:*

Ventilasiepype, hoofleidings of insluitings: Blou.

Opbergtenks, pompe, pypleidings, droogskoonmaakmasjinerie en spuithokkies: Rooi.

Geboue waarin vlambare vloeistowwe opgeberg, gebruik of hanteer word: Ongekleurd.

Ander bestaande geboue waar vereis: Grys of 'n neutrale kleur.

(6) On approval, a plan or plans shall become the property of the Council. On approval of such plans a written notice in accordance with these by-laws shall be issued with such conditions endorsed thereon as are deemed necessary by the Council.

(7) The approval of plans in respect of premises shall in no way imply the acceptance of any responsibility on the part of the Council in regard to such premises.

When Plans are Null and Void.

5. The approval by the Council in terms of section 4 of any plans shall lapse and be null and void if the provisions of these by-laws have not been complied with within one year after the date of such approval.

Permits.

6.(1) No person shall carry out any spraying operations with flammable liquid in any building or part thereof unless such person is in possession of a spray permit in respect of the said building or part thereof issued in accordance with these by-laws, or store, use or handle flammable liquid on any premises in excess of the under-mentioned quantities:

(a) Flammable liquid Class A — a total quantity of 50 litres.

(b) Flammable liquid Class B — a total quantity of 400 litres, unless such person is in possession of a certificate of registration in respect of such premises issued in terms of these by-laws.

6.(2) No certificate of registration or spray permit shall be issued in respect of any premises for the storage, use or handling of flammable liquid, unless application is made in writing to the Council and such application is accompanied by the prescribed charge as set out in Schedule 1 hereto, and until the provisions of these by-laws have been complied with in respect of such premises.

(3) Such certificate of registration or spray permit may be issued subject to such conditions as are deemed necessary by the Council, having regard to the circumstances pertaining to each application.

(4) Such certificate of registration shall state the maximum amount of each class of flammable liquid permitted to be stored, used or handled, the manner in which such liquid shall be stored, used or handled and the number of pumps, storage tanks and stores permitted on the premises.

(5) Every such certificate of registration shall only be valid for the period terminating on the next succeeding 31st day of December.

(6) No certificate of registration or spray permit, other than a renewal thereof, shall be issued in respect of any premises until the provisions of these by-laws have been complied with and the application therefor has been approved by the Council.

Supply of Flammable Liquid.

7. No person shall —

(a) supply or deliver or cause or permit to be supplied or delivered flammable liquid in excess of the quantity specified in section 6(1) to any premises, the

(6) Nadat 'n plan goedgekeur is, behou die Raad sodanige plan of planne. Wanneer sodanige planne goedgekeur is, word 'n skriftelike kennisgewing ooreenkomstig hierdie verordeninge uitgereik met sodanige voorwaardes wat die Raad nodig ag, daarop geëndosseer.

(7) Die goedkeuring van planne ten opsigte van enige perseel beteken geensins dat die Raad enige aanspreeklikheid met betrekking tot sodanige perseel aanvaar nie.

Wanneer Planne van Nul en Gener Waarde is.

5. Goedkeuring deur die Raad van enige plan kragtens artikel 4 verval en is van nul en gener waarde indien daar nie binne een jaar na die datum van sodanige goedkeuring aan die bepalings van hierdie verordeninge voldoen is nie.

Permitte.

6.(1) Niemand mag in 'n gebou of 'n gedeelte daarvan met vlambare vloeistowwe spuitwerk verrig nie, tensy hy in besit is van 'n spuitpermit ten opsigte van genoemde gebou of 'n gedeelte daarvan wat ooreenkomstig hierdie verordeninge uitgereik is of mag, tensy hy 'n registrasiesertifikaat ten opsigte van 'n perseel besit, meer vlambare vloeistof as die volgende hoeveelhede op sodanige perseel opberg, gebruik of hanteer nie:

(a) Vlambare vloeistof, Klas A — altesaam 50 liter.

(b) Vlambare vloeistof, Klas B — altesaam 400 liter, tensy sodanige persoon ten opsigte van sodanige perseel in besit is van 'n registrasiesertifikaat vir die perseel kragtens hierdie verordeninge uitgereik.

6.(2) Daar word geen registrasiesertifikaat of spuitpermit ten opsigte van 'n perseel vir die opberg, gebruik of hantering van vlambare vloeistof uitgereik nie, tensy skriftelik by die Raad aansoek gedoen word en die voorgeskrewe gelde soos in Bylae 1 hierby uiteengesit, die aansoek vergesel en alvorens aan die bepalings van hierdie verordeninge met betrekking tot sodanige perseel voldoen is.

(3) Sodanige registrasiesertifikaat of spuitpermit kan uitgereik word onderworpe aan sodanige voorwaardes wat die Raad, met inagneming van die omstandighede aan elke aansoek verbonde, noodsaaklik ag.

(4) Sodanige registrasiesertifikaat moet die grootste hoeveelheid vlambare vloeistof van elke klas wat opgeberg, gebruik of gehanteer mag word, asook die wyse waarop sodanige vloeistof opgeberg, gebruik of gehanteer moet word, en die getal pompe, opbergtenks en pakkamers wat op die perseel toegelaat word, aangee.

(5) Elke sodanige registrasiesertifikaat is slegs geldig vir die tydperk wat verstryk op die eerste daaropvolgende 31ste dag van Desember.

(6) Daar word geen registrasiesertifikaat of spuitpermit, uitgesonderd 'n hernuwing daarvan, ten opsigte van enige perseel uitgereik, alvorens aan die bepalings van hierdie verordeninge voldoen is en die aansoek daarvoor deur die Raad goedgekeur is.

Verskaffing van Vlambare Vloeistowwe.

7. Niemand mag —

(a) meer vlambare vloeistof as die hoeveelheid wat in artikel 6(1) gespesifiseer is, aan 'n perseel waarvan die okkupant nie in besit is nie van 'n registrasie-

occupier of which is not in possession of a certificate of registration issued in terms of these by-laws in respect of the said premises; or

(b) supply or deliver or cause or permit to be supplied or delivered to any premises flammable liquid in excess of the quantity or of a class other than that specified on the certificate of registration relating to such premises.

Exemptions and Requirements: General.

8.(1) Notwithstanding anything contained in these by-laws —

(a) flammable liquid shall not be deemed to be stored or conveyed or transported when contained in the fuel tank of a motor vehicle or stationary engine in normal use as such;

(b) any person may keep any flammable substance such as varnish, lacquer, paint, vulcanising cement or other similar preparations, hydraulic fluids and other similar preparations, liquids constituting or forming part of medicinal, cosmetic and other similar preparations and diesel and heavy furnace fuels on any premises where such substance is entirely contained in sealed metal containers and no container shall be opened on such premises except in the open air or in a store as defined in section 1: Provided that —

(i) where 1 kl or more of such substances is kept in any room or building, such room or building shall be constructed of non-combustible material and fire appliances shall be installed to the satisfaction of the Chief Fire Officer and the substances shall be situated in such a position that they shall not impede the escape of any person or animal from the premises in case of fire;

(ii) where the total quantity of such substances is in excess of 5 kl, such excess quantities shall be kept in a separate non-combustible room, building or store;

(iii) such room or building shall be constructed in such a manner and be surrounded by walls or bunds of such a character that the substances contained therein cannot escape therefrom, such walls or bunds to be of sufficient capacity to contain not less than 110 per cent of the maximum quantity capable of being stored therein;

(iv) the room or building shall be ventilated so as to adequately prevent the accumulation of flammable vapour within all portions of such room or building;

(v) the room or building shall be situated in such a position that it is not likely to endanger any other adjoining room, building or premises in case of fire;

(vi) the words "DANGER — NO SMOKING" in both official languages shall be prominently displayed in letters not less than 150 mm in height outside the entrances to every such room or building and shall at all times be maintained in such positions and in a legible condition;

sertifikaat wat ingevolge die bepalings van hierdie verordeninge ten opsigte van die genoemde perseel uitgereik is, verskaf of aflewer of toelaat dat dit verskaf of afgelewer word nie; of

(b) meer vlambare vloeistof as die hoeveelheid, of vlambare vloeistof van 'n ander klas as dié wat gespesifiseer is, in die registrasiesertifikaat wat betrekking op sodanige perseel het, aan 'n perseel verskaf of aflewer of toelaat dat dit verskaf of afgelewer word nie.

Vrystellings en Vereistes: Algemeen.

8.(1) Ondanks enigiets in hierdie verordeninge vervat —

(a) word daar nie geag dat vlambare vloeistof opgeberg of vervoer word wanneer dit in die brandstoftenk is van 'n motorvoertuig of 'n vasstaande masjien wat as sodanig in normale gebruik is nie;

(b) kan enigiemand enige vlambare stof soos vernis, lakvernis, verf, vulkaniseergom of ander soortgelyke preparate, hidrouliese vloeistowwe en ander soortgelyke preparate, vloeistowwe wat òf self is òf deel uitmaak van, geneeskundige, skoonheids- en ander soortgelyke preparate, en diesel en grootoond stowwe aanhou op enige perseel waar sodanige stowwe geheel en al in verseëlde metaalhouers gehou word en sodanige houer nie op die perseel oopgemaak word nie, behalwe in die buitelug of in 'n pakkamer soos omskryf in artikel 1: Met dien verstande dat —

(i) indien 1 kl of meer van sodanige stowwe in 'n vertrek of gebou gehou word, sodanige vertrek of gebou van nie-brandbare materiaal gebou moet wees, brandblustoestelle tot voldoening van die Brandweerhoof aangebring moet word, en die stowwe sodanig geberg moet word dat dit nie die ontvlugting van mense of diere in geval van 'n brand belemmer nie;

(ii) indien die totale hoeveelheid sodanige stowwe meer as 5 kl is, sodanige addisionele hoeveelhede in 'n afsonderlike nie-brandbare vertrek, gebou of pakkamer gehou moet word;

(iii) sodanige vertrek of gebou op so 'n wyse opgerig en omring moet wees van mure of walle van sodanige aard dat die stowwe wat daarin geberg is, nie daaruit kan ontsnap nie en sodanige mure of walle se inhoudsvermoë moet voldoende wees om minstens 110 persent van die grootste hoeveelheid stowwe wat daarin opgeberg kan word, te hou;

(iv) die vertrek of gebou sodanig geventileer moet word om die ophoping van vlambare damp in enige gedeelte van sodanige vertrek of gebou voldoende te voorkom;

(v) die vertrek of gebou sodanig geleë moet wees dat dit geen gevaar inhou vir aangrensende vertrekke, geboue of persele in geval van 'n brand nie;

(vi) opvallende kennisgewings met die woorde "GEVAAR — ROOK VERBODE" duidelik in albei amptelike tale daarop, in letters van minstens 150 mm hoog, buite alle ingange tot sodanige vertrek of gebou opgerig moet word, en te alle tye op die plekke in 'n leesbare toestand in stand gehou moet word;

(vii) no container shall be opened in such room or building;

(viii) fire appliances shall be installed to the satisfaction of the Chief Fire Officer;

(ix) the Chief Fire Officer may require other additional safety precautions to be complied with, having regard to the particular circumstances of any case.

Exemptions and Requirements: Class C Flammable Liquid.

(2)(a) The exemption referred to in subsection (1)(a) and (b) shall *mutatis mutandis* apply to Class C flammable liquid contained in drums and not exceeding 1 kl on any premises. In the event of the quantity exceeding 1 kl, the provisions of subsection (1)(b)(i) to (ix) inclusive shall *mutatis mutandis* apply.

(b) In the case of bulk storage of liquids, oils or other substances which are or are to be stored or used for heating or any other purpose, the procedure and provisions of sections 4, 5 and 33 to 46 inclusive shall be followed and shall *mutatis mutandis* apply, save and except that with reference to section 35(2) the Chief Fire Officer may at his discretion permit above ground storage tanks, subject to the following conditions:

(i) The capacity of any tank containing liquids with a true flash-point of more than 55°C but under 90°C and not installed in a building shall not exceed 2,3 kl and such tank shall not be positioned within 6 m of any protected work or within 4,5 m of any public thoroughfare;

(ii) The capacity of any tank containing liquids, oils or other substances with a true flash-point of over 90°C and not installed in a building, and any part of which is placed within a distance of 6 m from any part of a building, shall not exceed 23 kl, and if such tank is not so placed that the whole of it is below the surface of the adjoining ground, the following requirements shall be complied with:

(aa) If the tank is placed within a distance of 2 m from the building, unless the part of the wall of the building within 6 m from the tank is of fire-resisting construction and impervious, it shall be enclosed in a tank chamber.

(bb) If the tank is placed at a distance of more than 2 m but within a distance of 6 m from the building, it shall be placed in a tank chamber unless either the part of the wall of the building within 6 m from the tank and any opening therein shall be of fire-resisting construction or a screen wall of fire-resisting construction shall have been erected between the tank and the building: Provided that such screen wall shall have been erected co-extensive with the tank so as to project laterally for a distance of not less than 1 m at each extremity of such tank and such screen wall shall have foundations of adequate strength, and throughout its length shall have been erected above the

(vii) geen houer in sodanige vertrek of gebou oopgemaak mag word nie;

(viii) brandblussers tot voldoening van die Brandweerhoof geïnstalleer moet word;

(ix) die Brandweerhoof ander bykomende veiligheidsmaatreëls kan vereis met inagneming van die besondere omstandighede van enige geval.

Uitsonderings en Vereistes: Klas C Vlambare Vloeistowwe.

(2)(a) Die uitsondering waarna daar in subartikels (1)(a) en (b) verwys word, is *mutatis mutandis* van toepassing op Klas C vlambare vloeistowwe wat in dromme aangehou word en nie 1 kl op enige perseel oorskry nie. Waar die hoeveelheid 1 kl oorskry, is die bepalings van subartikel (1)(b)(i) tot en met (ix) *mutatis mutandis* van toepassing.

(b) In die geval van die massa opberging van vloeistowwe, olie of ander stowwe wat geberg of gebruik word of geberg of gebruik sal word vir verhitting of vir enige ander doel, moet die prosedure en bepalings van artikels 4, 5 en 33 tot en met 46 gevolg word en is *mutatis mutandis* van toepassing, behalwe dat die Brandweerhoof met verwysing na artikel 35(2) na goeddunke bogrondse opgaartenks kan toelaat onderworpe aan die volgende voorwaardes:

(i) Die inhoudsvermoë van enige tenk wat vloeistof met 'n flitspunt van meer as 55°C maar minder as 90°C bevat, en nie in 'n gebou geïnstalleer is nie, mag nie 2,3 kl oorskry nie, en sodanige tenk mag nie nader as 6 m van enige beskermde gebou of 4,5 m van enige openbare deurgang geleë wees nie;

(ii) Die inhoudsvermoë van enige tenk wat vloeistowwe, olie of ander stowwe met 'n flitspunt van meer as 90°C bevat en nie in 'n gebou geïnstalleer is nie, en waarvan enige deel nie meer as 6 m van enige deel van 'n gebou geleë is nie, mag nie 23 kl oorskry nie, en indien sodanige tenk so geplaas is dat dit nie heeltemal onder die omliggende grondhoogte geleë is nie, moet aan die volgende vereistes voldoen word:

(aa) Indien die tenk binne 2 m van 'n gebou geleë is, tensy die deel van die muur van die gebou wat binne 6 m van die tenk geleë is van brandbestande materiaal gebou en syferdig is, moet dit in 'n tenkkamer gehou word.

(bb) Indien die tenk meer as 2 m maar minder as 6 m van 'n gebou staan, moet dit in 'n tenkkamer geplaas word tensy die deel van die muur van die gebou binne 6 m van die tenk en enige opening daarin van brandbestande konstruksie is of 'n skeidsmuur van brandbestande materiaal tussen die tenk en die gebou opgerig word: Met dien verstande dat sodanige skeidsmuur gelyktydig met die tenk opgerig moet word sodat dit minstens 1 m aan weerskante van die uiterste van die tenk verbysteek, en sodanige skeidsmuur fondamente van voldoende sterkte moet hê en vir die volle lengte van die muur bokant die grondoppervlakte uitgebou moet wees tot 'n hoogte van minstens

ground to a height of not less than 1 m above the uppermost part of the tank.

(iii) If the storage tank is placed so that the whole of it is below the surface of the adjoining ground, it shall be covered by a roof of fire-resisting construction.

(c) All tanks shall be firmly placed in steel, concrete or brick saddles of adequate strength and stability or some other approved method. The Chief Fire Officer may require other additional safety precautions he may deem necessary to be complied with appertaining either to the tank or to apparatus or other equipment using fuel from such tank for any purpose whatsoever. Fire extinguishing appliances shall be installed to the satisfaction of the Chief Fire Officer.

Conditions of Certificate of Registration.

9.(1) No person shall store, use or handle or cause to be stored, used or handled on any premises —

(a) any quantity of flammable liquid in excess of the amount specified in the certificate of registration relating to such premises;

(b) any flammable liquid other than the class or classes specified in the certificate of registration relating to such premises;

(c) any flammable liquid in a manner other than the manner specified in the certificate of registration relating to such premises; or

(d) a greater number of pumps, storage tanks or stores than specified in the certificate of registration relating to such premises.

(2) Any person in lawful possession of any certificate of registration may make written application to the Council for the amendment of the total quantity or class of flammable liquid specified in such certificate. Such application shall be granted by the Council only when the proposed amendment conforms with the provisions of these by-laws. Where the Council has granted any such application, such person shall surrender the certificate of registration to the Council for amendment.

Display of Certificate of Registration.

10. Any person to whom a certificate of registration has been issued shall cause such certificate to be affixed and maintained in a conspicuous position on the registered premises. Such certificate shall be maintained at all times in such position and in a legible condition.

Renewal of Certificate of Registration or Spray Permit.

11. Application for the annual renewal of a certificate of registration or spray permit shall be made not later than 15 November of the year prior to that for which such renewal is required, on a form to be provided by the Council and shall be accompanied by the prescribed charge as set out in Schedule 1 hereto. No plans of the premises in terms of section 4 shall be required in the case of a renewal of a certificate of registration or spray permit, unless called for at the discretion of the Council.

1 m bokant die hoogste punt van die tenk.

(iii) Indien die opgaartenk so geplaas is dat dit heeltemal onder die oppervlakte van die omliggende grond geleë is, moet dit bedek word met 'n dak van brandbestande materiaal.

(c) Alle tenks moet stewig geplaas word in staal, beton of steenstutte van voldoende sterkte en stabiliteit of enige ander goedgekeurde metode. Die Brandweerhoof kan ander bykomende veiligheidsmaatreëls wat hy nodig ag en waaraan voldoen moet word, oplê met betrekking tot die tenk of apparaat of ander toerusting wat brandstof uit sodanige tenk gebruik vir watter doel ook al. Brandblusapparaat moet tot voldoening van die Brandweerhoof geïnstalleer word.

Voorwaardes van die Registrasiesertifikaat.

9.(1) Niemand mag op enige perseel —

(a) meer vlambare vloeistof as die hoeveelheid wat op die registrasiesertifikaat wat op sodanige perseel betrekking het, aangegee word;

(b) enige vlambare vloeistof, uitgesonderd die klas of klasse wat op die registrasiesertifikaat wat op sodanige perseel betrekking het, aangegee word;

(c) enige vlambare vloeistof op 'n ander wyse as dié wat op die registrasiesertifikaat wat op sodanige perseel betrekking het, aangedui word; of

(d) meer pompe, opbergtenks, of pakkamers as dié wat op die registrasiesertifikaat wat op sodanige perseel betrekking het, aangegee word;

opberg, gebruik of hanteer of laat opberg, gebruik of hanteer nie.

(2) Iemand wat in wettige besit van 'n registrasiesertifikaat is, kan by die Raad skriftelik aansoek doen om die totale hoeveelheid of die klas vlambare vloeistof wat op sodanige sertifikaat aangegee word, te laat wysig. Die Raad staan so 'n aansoek slegs toe indien die voorgestelde wysiging voldoen aan die bepalings van hierdie verordeninge. Indien die Raad sodanige aansoek toegestaan het, moet so 'n persoon die registrasiesertifikaat by die Raad indien sodat dit gewysig kan word.

Vertoning van Registrasiesertifikaat.

10. Iemand aan wie 'n registrasiesertifikaat uitgereik is, moet die sertifikaat op 'n opvallende plek op die geregistreerde perseel laat aanbring en onderhou. Sodanige sertifikaat moet te alle tye in 'n leesbare toestand op dié plek in stand gehou word.

Hernuwing van Registrasiesertifikaat of Spuitpermit.

11. Daar moet uiters op 15 November van die jaar wat die jaar voorafgaan ten opsigte waarvan die hernuwing benodig word, aansoek om die hernuwing van die registrasiesertifikaat of spuitpermit gedoen word op 'n vorm wat deur die Raad verskaf word, en die voorgeskrewe geld, soos in Bylae 1 hierby uiteengesit, moet die aansoek vergesel. Tensy die Raad na goeddunke dit verlang, word daar in die geval van 'n hernuwing van 'n registrasiesertifikaat of spuitpermit geen plan van die perseel kragtens artikel 4 vereis nie.

Transfer of Certificate of Registration or Spray Permit.

12.(1) A certificate of registration or spray permit may be transferred from one person to another.

(2) The person desiring such transfer shall apply in writing to the Council on a form to be provided by the Council for such purpose. Such application shall be accompanied by the prescribed charge as set out in Schedule 1 hereto, together with the certificate of registration or spray permit relating to the premises in respect of which such transfer is desired.

(3) No certificate of registration or spray permit shall be transferable from one premises to another.

Temporary Storage.

13.(1) The Council may in writing exempt from the provisions of section 6 for such period as it may deem necessary any person wishing to store more than 50 litres of Class A flammable liquid or more than 400 litres of Class B flammable liquid required for or in connection with any excavation, building, road making or other like operations of a temporary nature: Provided that —

(a) application is submitted in writing to the Council on a form to be obtained from the Council;

(b) suitable provision has been made to surround the containers of such flammable liquid by walls or bunds of such a character that such flammable liquid cannot escape from such walls or bunds either under the action of fire or otherwise; and

(c) at least one efficient chemical fire extinguisher of the dry chemical type as set out in section 26 has been provided.

(2) Any person to whom an exemption has been granted in terms of subsection (1) shall ensure that at all times —

(a) all reasonable precautions are taken to prevent any fire, flame or other agent likely to ignite flammable liquid vapour being brought into contact with such flammable liquid or its vapour;

(b) such flammable liquid is not placed within 4,5 m of any protected work or public thoroughfare; and

(c) the provisions of subsection (1)(b) and (c) are observed.

Installation and Erection.

14.(1) Immediately the installation of any pump, storage tank, filling device, dry-cleaning room, store, mixing room, spray room or other premises intended for the storage, use, or handling of flammable liquid has been completed, the occupier of the premises shall notify the Council in writing on a form to be obtained from it, of the date on which the work will be ready for inspection.

(2) No person shall use or cause or permit to be used such pump, storage tank, filling device, dry-cleaning room, store, mixing room, spray room or other premises for the storage, use or handling of flammable liquid until such person is in possession of a certificate of registration relating thereto.

Oordrag van Registrasiesertifikaat of Spuitpermit.

12.(1) 'n Registrasiesertifikaat of spuitpermit kan deur een persoon aan 'n ander oorgedra word.

(2) Die persoon wat sodanige oordrag verlang, moet skriftelik by die Raad aansoek daarom doen op 'n vorm wat die Raad vir die doel verskaf. Sodanige aansoek moet vergesel gaan van die voorgeskrewe geld, soos in Bylae 1 hierby uiteengesit, asook van die registrasiesertifikaat of spuitpermit wat betrekking het op die perseel ten opsigte waarvan sodanige oordrag verlang word.

(3) Geen registrasiesertifikaat of spuitpermit is van een perseel na 'n ander oordraagbaar nie.

Tydelike Opberging.

13.(1) Die Raad kan enigeen wat verlang om meer as 50 liter vlambare vloeistof Klas A, of meer as 400 liter vlambare vloeistof Klas B, wat vir of in verband met uitgrawingswerk, bouwerk, padaanleg of ander soortgelyke werk van 'n tydelike aard benodig word, op te berg, skriftelik vir sodanige tydperk as wat hy dit nodig ag, van die bepalings van artikel 6, vrystel: Met dien verstande dat —

(a) daar skriftelik op 'n vorm wat van die Raad verkrygbaar is, by die Raad aansoek gedoen word;

(b) daar behoorlik voorsorg getref is om die houers van sodanige vlambare vloeistof te omring met mure of walle van so 'n aard dat die vlambare vloeistof nie ten gevolge van brand of andersins, deur die mure of walle kan uitlek nie; en

(c) daar minstens een doeltreffende chemiese brandblustoestel van die droë chemiese tipe, soos in artikel 26 uiteengesit, verskaf word.

(2) Iemand aan wie vrystelling kragtens subartikel (1) verleen is, moet te alle tye sorg dra dat —

(a) alle redelike voorsorg getref word om te voorkom dat 'n brand, vlam of ander middel wat vlambare vloeistof of vloeistofdampe aan die brand kan laat slaan, in aanraking met sodanige vlambare vloeistof of die dampe daarvan gebring word;

(b) sodanige vlambare vloeistof nie binne 4,5 m van 'n beskermde gebou of openbare verkeersweg geplaas word nie; en

(c) die bepalings van subartikel (1)(b) en (c) nagekom word.

Installasie en Oprigting.

14.(1) Onmiddellik nadat 'n pomp, opbergtenk, vultoestel, droogskoonmaaklokaal, pakkamer, menglokaal, spuitlokaal of ander perseel wat vir die opberg, gebruik of hantering van vlambare vloeistof bedoel is, klaar opgerig is, moet die okkupant van die perseel die Raad skriftelik op 'n vorm wat by die Raad verkrygbaar is, verwittig van die datum waarop die werk vir inspeksie gereed is.

(2) Niemand mag so 'n pomp, opbergtenk, vultoestel, droogskoonmaaklokaal, pakkamer, menglokaal, spuitlokaal of ander perseel vir die opberg, gebruik of hantering van vlambare vloeistof gebruik, laat gebruik, of toelaat dat dit daarvoor gebruik word nie, alvorens so iemand 'n registrasiesertifikaat wat daarop betrekking het, besit.

Additions and Alterations to Registered Premises.

15.(1) No additions or alterations to any existing registered premises shall be made unless and until a plan of the existing premises, together with the proposed work, shall have been submitted to the Council and approved by it in writing.

(2) Such plan shall be in accordance with the provisions of section 4.

Removals and Dismantling.

16.(1) Any person who removes or causes or permits to be removed any pump, storage tank or filling device from any registered premises, other than a bulk depot, shall give notice of such removal in writing to the Council on a form to be obtained from the Chief Fire Officer.

(2) The removal of any such pump, tank or filling device from any registered premises shall *ipso facto* cancel the certificate of registration insofar as it refers to such pump, tank or filling device, as the case may be, together with any other authority, including any exemption granted in terms of these by-laws and no such pump, tank or filling device shall be re-erected on such premises unless and until a new certificate of registration has been obtained in the manner provided in terms of these by-laws: Provided that the provisions of this section shall not apply in respect of any such pump, storage tank or filling device which is temporarily removed for the purposes of effecting repairs thereto.

Storage, Use and Handling on Registered Premises Prohibited in Certain Circumstances.

17. Except as otherwise provided in these by-laws, no person shall store, use or handle, or permit or cause to be stored, used or handled any flammable liquid on any registered premises —

(a) where such flammable liquid or its vapour comes or is likely to come into contact with any fire, flame, naked light or other agent likely to ignite such flammable liquid or its vapour;

(b) unless such premises are so situated or constructed or so protected by surrounding walls as not to expose any adjoining premises, room, building, or other property to the risk of danger from fire;

(c) so situated as to prevent or impede the escape of any person or animal in case of fire or otherwise;

(d) unless all equipment and apparatus used on such premises for the storage, use or handling of flammable liquid is maintained in good and proper order and free from leakage of flammable liquid; or

(e) unless such person has taken all due precautions for the prevention of accidents by fire or explosion on such premises, and for the prevention of unauthorized persons obtaining access to the flammable liquid kept thereon.

Prohibition of Certain Acts.

18. No person who stores, uses or handles or causes or permits to be stored, used or handled any flam-

Aanbousels en Veranderings aan 'n Geregistreerde Perseel.

15.(1) Geen aanbousel of verandering mag aan enige bestaande geregistreerde perseel aangebring word nie, tensy en alvorens 'n plan van die bestaande perseel, asook van die voorgestelde werk, by die Raad ingedien en skriftelik deur hom goedgekeur is.

(2) Sodanige plan moet ooreenkomstig die bepalings van artikel 4 wees.

Verwydering en Demontering.

16.(1) Iemand wat 'n pomp, opbergtenk of vultoestel van 'n geregistreerde perseel, uitgesonderd 'n grootmaatdepot, verwyder, laat verwyder, of toelaat dat dit verwyder word, moet die Raad skriftelik daarvan in kennis stel op 'n vorm wat by die Brandweerhoof verkrygbaar is.

(2) Indien so 'n pomp, tenk of vultoestel van 'n geregistreerde perseel verwyder word, verval die registrasiesertifikaat *ipso facto* vir sover dit, na gelang van die geval, betrekking het op sodanige pomp, tenk of vultoestel, asook enige ander magtiging, insluitende 'n vrystelling, wat kragtens hierdie verordeninge toegestaan is, en geen sodanige pomp, tenk of vultoestel mag weer op die terrein opgerig word nie, tensy en alvorens 'n nuwe registrasiesertifikaat verkry is op die wyse ingevolge hierdie verordeninge bepaal: Met dien verstande dat die bepalings van hierdie artikel nie van toepassing is in die geval van 'n pomp, opbergtenk of vultoestel wat tydelik verwyder word met die doel om herstelwerk daaraan te verrig nie.

Opberging, Gebruik en Hantering op Geregistreerde Persele word onder Sekere Omstandighede Verbied.

17. Behoudens andersluidende bepalings in hierdie verordeninge vervat, mag niemand vlambare vloeistof op 'n geregistreerde perseel opberg, gebruik of hanteer, laat opberg, gebruik of hanteer nie —

(a) indien sodanige vlambare vloeistof of die dampe daarvan met enige vuur, vlam, oop lig, of 'n ander middel wat sodanige vlambare vloeistof of die dampe daarvan aan die brand kan laat slaan, in aanraking kom, of moontlik daarmee in aanraking kan kom;

(b) tensy sodanige perseel aldus geleë of gebou is, of so deur ringmure beskerm word, dat dit geen aangrensende perseel, vertrek, gebou of ander eiendom aan brand blootstel nie;

(c) indien dit so geleë is dat dit die ontkoming van 'n persoon of dier in die geval van brand, of andersins, verhinder of belemmer;

(d) tensy alle toerusting en apparate wat in sodanige perseel vir die opberg, gebruik of hantering van vlambare vloeistof gebruik word, behoorlik en deeglik onderhou word, en sorg gedra word dat geen vlambare vloeistof uitlek nie; of

(e) tensy sodanige persoon alle behoorlike voorsorg getref het om ongelukke weens brand of ontploffing op sodanige perseel te voorkom en te verhoed dat ongemagtigde persone toegang verkry tot die vlambare vloeistof wat daar geberg word.

Sekere Dade word Verbied.

18. Niemand wat vlambare vloeistof op 'n perseel opberg, gebruik of hanteer, dit daar laat opberg, gebruik

mable liquid on any premises shall do or cause or permit to be done any act which tends or is likely to cause fire or explosion.

Notice to Discontinue Dangerous Method.

19.(1) Where on inspection of any premises it appears that any method of storage, use, transport or handling of flammable liquid is in conflict with the provisions of these by-laws and is calculated to endanger the safety of the public or of any person employed in or on such premises, any duly authorized officer of the Council may require the immediate discontinuance of such method or the removal of the flammable liquid to a place of safekeeping.

(2) Any person failing to comply with any instruction of any duly authorized officer of the Council, issued in terms of this section, shall be guilty of an offence in terms of these by-laws.

Flammable Liquid Escaping Into Drains.

20. No person shall cause or permit flammable liquid to enter any sewer, inlet or drain communicating with any sewer or any surface water.

Prohibition Against Devices and Pumps in Basements.

21. No person shall use or cause or permit to be used in any basement any device for spraying flammable liquid or any pump or other device for the issue or transfer of flammable liquid to vehicles or containers.

Filling Operations.

22.(1) No person shall transfer, other than at a bulk depot, any flammable liquid from or to any road tank wagon unless such transfer is carried out under seal and the engine of such road tank wagon is stopped.

(2) The refuelling of aircraft at an aerodrome or landing ground may be performed from a road tank wagon equipped with an approved power pump: Provided that the engine or engines of such aircraft is or are stopped.

Filling On or Across Public Sidewalks.

23. No person shall —

(a) take on or across any public sidewalk or cause or permit to be so taken the hose of a pump for the purpose of replenishing any vehicle or container with flammable liquid; or

(b) so replenish or cause or permit to be so replenished any vehicle or container which is standing on any public sidewalk.

Replenished Fuel Tanks.

24.(1) No person shall —

(a) upon any registered premises strike a match or smoke a pipe, cigar or cigarette or ignite a lighter or other similar contrivance or approach with any fire, flame, naked light or other agent likely to ignite flammable liquid or its vapour within a

of hanteer, of toelaat dat dit geskied, mag 'n daad verrig of toelaat dat dit verrig word, wat tot brand of 'n ontploffing kan lei, of wat dit moontlik kan vercorsaak nie.

Kennisgewing om 'n Gevaarlike Metode te Staak.

19.(1) Indien daar by ondersoek van 'n perseel blyk dat 'n metode waarvolgens vlambare vloeistof opgeberg, gebruik, vervoer of gehanteer word, strydig met die bepalings van hierdie verordeninge is, en geag word dat dit die publiek of iemand wat in of op sodanige perseel werksaam is, aan gevaar blootstel, kan enige behoorlik-gemagtigde beampte van die Raad eis dat sodanige metode onmiddellik gestaak word, of dat die vlambare vloeistof na 'n plek vir veilige bewaring verwyder word.

(2) Iemand wat in gebreke bly om aan 'n opdrag van 'n behoorlik-gemagtigde beampte van die Raad, wat kragtens die bepalings van hierdie artikel uitgereik is, te voldoen, is ingevolge hierdie verordeninge skuldig aan 'n misdryf.

Vlambare Vloeistof Mag nie in Riole Inloop nie.

20. Niemand mag toelaat dat vlambare vloeistof in 'n riool of 'n inloop- of afloopvoor wat na 'n riool of 'n watervoor lei, inloop nie.

Verbod op Toestelle en Pompe in Kelderverdiepings.

21. Niemand mag 'n toestel om vlambare vloeistof mee te spuit, of 'n pomp of 'n ander toestel om vlambare vloeistof aan voertuie of houers te lewer of daarheen oor te bring, in 'n kelderverdieping gebruik, laat gebruik of toelaat dat dit daar gebruik word nie.

Vulwerksaamhede.

22.(1) Niemand mag, elders as by 'n grootmaatdepot, vlambare vloeistof van of na 'n padtenkvoertuig oorplaas, tensy dit by wyse van verseëlde oorplasing geskied, en die enjin van so 'n padtenkvoertuig afgeskakel is.

(2) Brandstof kan aan 'n vliegtuig op 'n lughawe of 'n landingsplek vanuit 'n padtenkvoertuig wat met 'n goedgekeurde kragpomp toegerus is, voorsien word: Met dien verstande dat die enjin of enjins van sodanige vliegtuig afgeskakel is.

Vulwerksaamhede Op of Oor Openbare Sypaadjies.

23. Niemand mag —

(a) die slang van 'n pomp op of oor 'n openbare sypaadjie gebruik, laat gebruik of toelaat dat dit aldus gebruik word, met die doel om 'n voertuig of houer met vlambare vloeistof te vul nie; of

(b) 'n voertuig of houer wat op 'n openbare sypaadjie staan, aldus te vul of te laat vul of toelaat dat dit gevul word nie.

Brandstoftenks wat Volgemaak Word.

24.(1) Niemand mag —

(a) op 'n geregistreerde perseel 'n vuurhoutjie trek, of 'n pyp, sigaar of sigaret rook, of 'n sigaretaansteker of soortgelyke toestel aan die brand steek, of met enige vuur, vlam, oop lig of ander middel wat moontlik vlambare vloeistof of die dampe

distance of 6 m of any fuel tank of any motor vehicle whilst such fuel tank is being replenished or is open; or

(b) replenish or permit to be replenished any such fuel tank while the engine of such motor vehicle is in motion.

(2) All registered premises shall have prominent notice boards bearing the words "DANGER — NO SMOKING" in letters not less than 150 mm in height in both official languages erected and such notice boards shall be maintained in such position and in a legible condition.

Replenishing of Public Omnibuses.

25. No person shall replenish or cause or permit to be replenished the fuel tank of any motor omnibus or carry or cause or permit to be carried any flammable liquid in or on any motor omnibus, except in the fuel tank thereof, whilst any person, other than the driver or person responsible therefor, is within or upon such omnibus.

Fire Appliances.

26.(1) Except where otherwise provided in these by-laws, the person to whom the certificate of registration or permit has been issued in terms of these by-laws shall install or cause to be installed on all premises to which such certificate or permit refers in an easily accessible and visible position on a wall or other suitable position not less than 1 m above the level of the floor of the premises, fire extinguishers on the following minimum scale:

One such fire extinguisher of the dry chemical type shall be installed for each two pumps or other filling device, each flammable liquid store, each dry-cleaning room, each mixing room or each spray room on the premises.

(2) Such fire extinguishers shall be efficient dry chemical fire extinguishers, each of a capacity of not less than 9 kg: Provided that where the Chief Fire Officer is of the opinion, having regard to the particular circumstances of any case, that dry chemical fire extinguishers are not adequate, such other fire extinguishers as he may consider to be required by the particular hazard shall be installed.

(3) Where, in terms of these by-laws, any fire extinguisher is required to be installed, such extinguisher shall be approved of by the Chief Fire Officer.

(4) The person to whom a certificate of registration, spray permit or transport permit has been issued in terms of these by-laws, shall maintain at all times on the premises or vehicle to which such certificate or permit relates —

(a) all fire extinguishers, appliances and alarms in accordance with the provisions of these by-laws; and

(b) all such equipment in good order and ready for immediate use.

Examination of Fire Appliances.

27.(1) Where, in terms of these by-laws, any fire extinguisher, fire fighting equipment, or fire alarm has

daarvan aan die brand kan laat slaan, binne 6 m van 'n motorvoertuig se brandstoftenk kom, terwyl sodanige tenk gevul word of oopstaan nie; of

(b) sodanige brandstoftenk vul of toelaat dat dit gevul word terwyl die enjin van so 'n motorvoertuig nog loop nie.

(2) Alle geregistreerde persele moet voorsien wees van opvallende kennisgewings met die woorde "GEVAAR — ROOK VERBODE" duidelik in albei amptelike tale daarop in letters minstens 150 mm hoog, en moet te alle tye op sodanige plek en in leesbare toestand in stand gehou word.

Openbare Motorbusse wat van Brandstof Voorsien Word.

25. Niemand mag, terwyl enige ander persoon behalwe die bestuurder of die persoon wat daarvoor verantwoordelik is, in of op 'n motorbus is, die brandstoftenk van sodanige motorbus vul, laat vul of toelaat dat dit gevul word, of vlambare vloeistof in of op sodanige motorbus vervoer, laat vervoer, of toelaat dat dit aldus vervoer word, uitgesonderd in die brandstoftenk daarvan nie.

Brandblustoestelle.

26.(1) Behoudens andersluidende bepalings in hierdie verordeninge vervat, moet die persoon aan wie die registrasiesertifikaat of permit kragtens hierdie verordeninge uitgereik is, op alle persele waarop sodanige sertifikaat of permit betrekking het, op 'n maklik toegankliike en sigbare plek aan 'n muur of op 'n ander geskikte plek minstens 1 m bokant die oppervlakte van die perseel se vloer, brandblustoestelle volgens die onderstaande minimum skaal aanbring of laat aanbring:

Een sodanige brandblustoestel van die droë chemiese tipe moet ten opsigte van elke vulstasie, of elke twee pompe, ander vultoestel, pakkamer vir vlambare vloeistof, droogskoonmaaklokaal, menglokaal of spuitlokaal op die perseel aangebring word.

(2) Sodanige brandblustoestelle moet doeltreffende droë chemiese brandblustoestelle wees wat elkeen 'n inhoudsvermoë van minstens 9 kg het: Met dien verstande dat waar die Brandweerhoof, met inagneming van die besondere omstandighede van 'n geval, van mening is dat die brandblustoestelle van die droë chemiese tipe nie voldoende is nie, moet sodanige ander brandblustoestelle wat hy vir die besondere gevaar nodig ag, geïnstalleer word.

(3) Waar daar kragtens hierdie verordeninge 'n chemiese Brandblustoestel aangebring moet word, moet so 'n brandblustoestel deur die Brandweerhoof goedgekeur word.

(4) Die persoon aan wie daar 'n registrasiesertifikaat, spuitpermit of 'n vervoerpermit kragtens hierdie verordeninge uitgereik is, moet te alle tye op die perseel of voertuig waarop sodanige sertifikaat of permit van toepassing is —

(a) alle brandblustoestelle, apparate en alarms ooreenkomstig die bepalings van hierdie verordeninge; en

(b) al sodanige toerusting in 'n goeie toestand en gereed vir onmiddellike gebruik,

in stand hou.

Ondersoek van Brandblustoestelle.

27.(1) Waar daar ingevolge hierdie verordeninge 'n chemiese brandblustoestel, brandweertoerusting, of

been installed on any premises, the occupier of such premises shall cause such fire extinguisher, equipment or alarm to be examined once every 12 months by a qualified person in accordance with section 22 of the Fire Brigade By-laws.

(2) Every such fire extinguisher, all such equipment and every such alarm shall bear a label on which such person examining it shall endorse his name, the date of examination and the condition, in his opinion, of the fire extinguisher, equipment or alarm at that date.

Reporting Accidents.

28. The occupier of any premises shall immediately report to the Chief Fire Officer any fire or accident involving flammable liquid and substances that has occurred in connection with any such premises where such fire or accident has resulted in damage to any property or injury to any person.

Rules to be Observed on Premises not Required to be Registered in Terms of these By-laws.

29.(1) No person shall store, use or handle or cause or permit to be stored, used or handled any flammable liquid or any unregistered premises unless such flammable liquid is stored, used or handled in such a place or in such a manner that —

(a) no flammable liquid or its vapour comes or is likely to come into contact with any fire, flame or naked light or other agent likely to ignite such flammable liquid or its vapour; or

(b) in the case of fire, the escape of persons or animals will not be prevented or impeded.

(2) No person shall use or handle or cause or permit to be used or handled any flammable liquid on unregistered premises, except in a suitable place in the open air so that the fumes can escape easily or in a room provided with adequate ventilation to remove the fumes therefrom and effectively prevent the accumulation of fumes therein.

(3) On unregistered premises flammable liquid shall be stored only in a substantial container which shall be kept securely closed when not in immediate use.

Inspection of Premises.

30.(1) Any duly authorized member of the Fire Department may, for any purpose connected with the carrying out of these by-laws in accordance with the provisions of section 72 of the Local Government Ordinance, 1939, enter upon any premises whatsoever, and make such examination and enquiry thereon as he may deem necessary.

(2) The owner or occupier, or failing the presence on the premises, any other person employed thereon shall upon demand disclose to such authorized officer the presence of any flammable liquid in or upon such premises and shall answer all enquiries relating either to the observance of these by-laws or to any condition in connection with the certificate of registration or permit.

brandalarm op 'n perseel aangebring is, moet die okkupant van sodanige perseel die brandblustoestel, toerusting of alarm een maal elke 12 maande deur 'n gekwalifiseerde persoon laat ondersoek ingevolge die bepalings van artikel 22 van die Brandweerverordeninge.

(2) Elke sodanige brandblustoestel, toerusting en alarm moet 'n etiket aanhê waarop die persoon wat dit ondersoek, sy naam asook die datum van die ondersoek en die besonderhede in verband met die toestand waarin die brandblustoestel, toerusting of alarm op daardie tydstip na sy mening verkeer, moet aanteken.

Ongelukke moet Aangemeld word.

28. Die okkupant van 'n perseel moet enige brand of ongeluk waarby vlambare vloeistof en ander stowwe betrokke is en wat plaasgevind het in verband met enige sodanige perseel waar so 'n brand of ongeluk skade aan eiendom berokken of beserings aan persone veroorsaak het, onmiddellik by die Brandweerhoof aanmeld.

Reëls Ten Opsigte van Persele wat nie Ingevolge hierdie Verordeninge Geregistreer hoef te word nie.

29.(1) Niemand mag vlambare vloeistof op 'n ongeregistreerde perseel opberg, gebruik of hanteer, of dit daar laat opberg, gebruik of hanteer, of toelaat dat dit geskied nie, tensy die vlambare vloeistof op sodanige plek of op sodanige wyse opgeberg, gebruik of gehanteer word, dat —

(a) geen vlambare vloeistof of dampe daarvan met enige vuur, vlam, of oop lig of 'n ander middel wat moontlik sodanige vlambare vloeistof of die dampe daarvan aan die brand kan laat slaan, in aanraking kom, of moontlik daarmee in aanraking kan kom nie; of

(b) die ontkoming van persone of diere in die geval van brand, nie verhinder of belemmer word nie.

(2) Niemand mag vlambare vloeistof op 'n ongeregistreerde perseel gebruik of hanteer, of laat gebruik of hanteer, of toelaat dat dit daar gebruik of gehanteer word nie, behalwe op 'n geskikte plek in die buitelug sodat die dampe maklik kan ontsnap, of in 'n kamer wat behoorlik geventileer is sodat die dampe daaruit weggevoer word, en doeltreffend verhoed word dat dampe daarin versamel.

(3) Op ongeregistreerde persele mag vlambare vloeistof slegs in 'n sterk houer, wat dig toegehou moet word wanneer dit nie daadwerklik in gebruik is nie, opgeberg word.

Ondersoek van Persele.

30.(1) Enige behoorlik gemagtigde beampte van die Brandweer kan vir enige doel in verband met die nakoming van hierdie verordeninge ooreenkomstig die bepalings van artikel 72 van die Ordonnansie op Plaaslike Bestuur, 1939, enige perseel betree en sodanige navrae doen of ondersoek instel wat hy nodig mag ag.

30.(2) Die eienaar of okkupant of, indien hulle nie op die perseel teenwoordig is nie, enige ander persoon wat daar in diens is, moet op versoek van sodanige gemagtigde beampte, hom verwittig van enige vlambare vloeistof wat in of op sodanige perseel aanwesig is, en moet alle navrae met betrekking tot die nakoming van die bepalings van hierdie verordeninge, of met betrekking tot die voorwaardes in verband met die registrasiesertifikaat of permit beantwoord.

Taking of Samples.

31. Upon inspection of any premises by an authorized officer of the Council, such officer may take samples for the purpose of analysis or examination of any flammable liquid or substance, or of any liquid or substance suspected of being flammable, which is found upon such premises: Provided that—

(a) any sample so taken shall be taken in the presence of the owner, occupier or other person in charge, as the case may be;

(b) the owner, occupier or other person in charge may require the officer taking the sample to divide it into two parts and to mark, seal and deliver to him one such part.

Breach of Conditions.

32. Any person who commits any breach of any condition endorsed on the approval notice or certificate of registration or spray permit issued in terms of these by-laws shall be guilty of an offence in terms of these by-laws.

STORAGE TANKS, PUMPS, PIPE-LINES AND CONTAINERS.

Capacity of Underground Storage Tanks.

33. The capacity of any underground storage tank, if not situated within a bulk depot or an aerodrome or landing ground used by aircraft, shall not exceed 23 kl: Provided that a storage tank with a greater capacity than 23 kl may be installed on any premises where such tank is to be used for manufacturing purposes.

Construction of Tanks.

34.(1) Every storage tank shall be constructed of iron, steel or other suitable metal plates of adequate strength and properly riveted and caulked, welded, brazed or otherwise secured by some equally satisfactory process.

(2) The top and sides of such tank shall be supported and strengthened by such upright girders, angle irons and ties, as having regard to the capacity, shape and situation of the tank, may be necessary to render it sufficiently strong for the purpose to which it is being put.

(3) Every opening in any underground storage tank, other than a vent pipe, shall be securely closed by an effective and properly secured cap, cover, tap or valve.

(4) All pipes, other than a ventilation pipe, connected to an underground storage tank shall be carried down to within 100 mm of the bottom of the tank.

(5) Every above ground storage tank shall have an adequate system of ventilation so as to prevent excessive internal pressure.

(6) Every storage tank shall be maintained at all times in accordance with the respective provisions of this section.

Installation of Storage Tanks.

35.(1) Every underground storage tank shall—

Die Neem van Monsters.

31. Wanneer 'n gemagtigde beampte van die Raad 'n perseel ondersoek, kan sodanige beampte monsters van enige vlambare vloeistof of 'n stof of enige vloeistof of stof in verband waarmee vermoed word dat dit vlambaar is, en wat op sodanige perseel aangetref word, neem met die doel om dit te ontleed of te ondersoek: Met dien verstande dat—

(a) enige monster aldus geneem, in die teenwoordigheid van die eienaar, okkupant of ander verantwoordelike persoon, na gelang van die geval, geneem moet word;

(b) die eienaar, okkupant of ander verantwoordelike persoon kan eis dat die beampte wat die monster neem, dit in twee dele moet verdeel en die een deel moet merk, verseël, en aan hom oorhandig.

Verbreking van Voorwaardes.

32. Iemand wat 'n voorwaarde verbreek wat op die goedkeuringskennisgewing of registrasiesertifikaat of spuitpermit staan wat kragtens hierdie verordeninge uitgereik is, is ingevolge hierdie verordeninge skuldig aan 'n misdryf.

OPBERGTENKS, POMPE, PYPLEIDINGS EN HOUERS.

Inhoudsvermoë van Ondergrondse Opbergtenks.

33. Die inhoudsvermoë van 'n ondergrondse opbergtenk, indien dit nie in 'n grootmaatdepot of op 'n lughawe of landingsterrein wat deur vliegtuie gebruik word, geleë is nie, moet hoogstens 23 kl groot wees: Met dien verstande dat 'n opbergtenk met 'n groter inhoudsvermoë as 23 kl op 'n perseel geïnstalleer kan word indien sodanige tenk vir vervaardigingsdoeleindes gebruik word.

Bou van Tenks.

34.(1) Elke opbergtenk moet vervaardig wees van yster-, staal- of ander geskikte metaalplate wat sterk genoeg is en wat behoorlik met naels vasgeklink en gekalfater, gesweis, hard gesoldeer of andersins deur middel van 'n ewe doeltreffende proses vasgeheg is.

(2) Die bopunt en kante van sodanige tenk moet ondersteun en versterk word deur middel van stutte, balke, hoekysters en ankers, wat met inagneming van die inhoudsvermoë, die vorm en ligging van die tenk, nodig mag wees ten einde dit sterk genoeg te maak vir die doel waarvoor dit gebruik word.

(3) Elke opening, uitgesonderd 'n lugpypie, in 'n ondergrondse opbergtenk moet behoorlik deur 'n doeltreffende dop, deksel, kraan of klep wat goed vas is, toegemaak word.

(4) Alle pype, uitgesonderd 'n ventilasiepyp, wat met 'n ondergrondse opbergtenk verbind is, moet tot binne 100 mm van die boom van die tenk af reik.

(5) Elke bogrondse opbergtenk moet 'n doeltreffende ventilasiestelsel hê ten einde te voorkom dat die druk daarbinne te hoog word.

(6) Elke opbergtenk moet te alle tye ooreenkomstig die betrokke bepalings van hierdie artikel, in stand gehou word.

Aanbring van Opbergtenks.

35.(1) Elke ondergrondse opbergtenk moet—

(a) be so installed that the top of the tank is not less than 600 mm below the surrounding ground level, or covered with not less than a 150 mm reinforced concrete mat and not less than 150 mm of earth or sand;

(b) be set in firm foundations and wholly surrounded with soft earth or sand or encased in concrete;

(c) with the exception of any opening to the manhole, be covered with concrete adequately reinforced in all cases where vehicular traffic passes over such tank;

(d) be situated within the boundary line of the premises; and

(e) where such tank is situated in or within 1,5 m of any basement, be installed in a chamber of concrete not less than 150 mm thick, or brick not less than 215 mm thick, set in cement mortar with the space within the pit surrounding the tank completely filled with closely packed earth or sand: Provided that the provisions of this section shall not apply to any bulk depot.

(2) Above ground storage tanks shall only be installed within a bulk depot.

Ventilation of Underground Storage Tanks.

36. Every underground storage tank shall have a ventilation pipe of not more than 50 mm nor less than 25 mm internal diameter, the top of which pipe shall —

(a) extend at least 4 m into the open air;

(b) be protected with a non-corrodible wire gauze with a mesh aperture not exceeding 600 microns. Such gauze shall be so secured that it may be removed for examination and cleaning;

(c) terminate at least 6 m away from any fire, flame, naked light or other agent likely to ignite flammable liquid or its vapour.

Installation of Storage Tanks, Pumps or Filling Devices in Buildings.

37. No storage tank, pump or filling device shall be installed in or below any building which is more than one storey high, unless the ceiling above such tank, pump or filling device is constructed of reinforced concrete.

Abandoned Tanks.

38. In the event of any underground storage tank being abandoned, the owner of such tank shall cause it to be removed or filled with sand or liquid concrete.

Entering of Storage Tanks.

39. No person shall —

(a) enter or cause or permit any person to enter any storage tank which has contained flammable liquid until such tank has been totally freed from any flammable liquid vapour, unless such person is wearing an efficient gas mask; or

(a) so aangebring word dat die bopunt van die tenk minstens 600 mm onder die oppervlakte van die omliggende grond is, of moet met 'n gewapende betonblad, minstens 150 mm dik, en met minstens 150 mm grond of sand bedek wees;

(b) op 'n vaste fondament aangebring en heeltemal met sagte grond of sand omring word, of met beton omhul word;

(c) met uitsondering van enige opening na die mangat, in alle gevalle waar voertuigverkeer oor sodanige tenk gaan, met behoorlik gewapende beton bedek word;

(d) binne die grenslyn van die perseel geleë wees; en

(e) in die geval waar sodanige tenk wat in 'n kelderverdieping of binne 1,5 m daarvandaan is aangebring word in 'n kamer met betonmure, minstens 150 mm dik, of baksteenmure minstens 215 mm dik, en met sementmortel gemessel is, en die ruimte in die put om die tenk moet heeltemal gevul wees met grond of sand wat styf vasgestamp is: Met dien verstande dat die bepalings van hierdie artikel nie op 'n grootmaatdepot van toepassing is nie.

(2) Bogrondse opbergtenks moet slegs in grootmaatdepots aangebring word.

Ventilasie van Ondergrondse Opbergtenks.

36. Elke ondergrondse opbergtenk moet 'n ventilasiepyp met 'n binne-middellyn van hoogstens 50 mm en minstens 25 mm hê en die boonste punt van die pyp moet —

(a) minstens 4 m in die buitelug uitsteek;

(b) met gaasdraad wat teen invreting bestand is en wat 'n gaasopening van minstens 600 mikrone het, op so 'n wyse bedek word dat die gaasdraad vir ondersoek- en reinigingsdoeleindes verwyder kan word;

(c) minstens 6 m van enige vuur, vlam of oop lig of ander middel wat moontlik vlambare vloeistof of dampe daarvan, aan die brand kan laat slaan, afweg wees.

Die Aanbring van Opbergtenks, Pompe of Vultoestelle in Geboue.

37. Geen opbergtenk, pomp of vultoestel mag in of onder 'n gebou hoër as een verdieping, aangebring word nie, tensy die plafon bokant sodanige tenk, pomp of vultoestel van gewapende beton vervaardig is.

Tenks wat nie Meer Gebruik word nie.

38. Ingeval 'n ondergrondse opbergtenk nie meer gebruik word nie, moet die eienaar van sodanige tenk dit laat verwyder of dit met sand of vloeibare beton laat opvul.

Toegang tot Opbergtenks.

39. Niemand mag —

(a) 'n opbergtenk wat vlambare vloeistof bevat het, binnegaan of iemand anders dit laat binnegaan, of toelaat dat hy dit binnegaan alvorens alle vlambare vloeistofdampe uit sodanige tenk verwyder is nie, tensy die persoon 'n doeltreffende gasmasker aan het; of

(b) enter any storage tank at any time unless he is bound to a life line which at surface level is under the control of a reliable person continuously responsible for the safety of the person in the storage tank.

Position of Pumps.

40.(1) All pumps and all other filling devices used or capable of use for the issue or transfer of flammable liquid to any vehicle or container, shall be situated on private property and not less than 6 m from the boundary between it and any public place: Provided that no such pump or filling device shall be erected in such a position that a hose can be used for the issue or transfer of flammable liquid onto or across any public place.

(2) Notwithstanding anything contained in section 3, subsection (1) shall not apply to pumps or filling devices already erected on registered premises at the time of the coming into operation of these by-laws when a change of control or ownership of such premises occurs, unless the position of such existing pump or filling device constitutes or is likely to cause a danger or obstruction to the public or vehicular traffic.

Pumps on Ramps.

41. Pumps or other devices used or intended to be used for the issue of flammable liquid to motor vehicles or containers shall not be erected on any ramp or within 6 m of the beginning of the ramp.

Dipping Sticks.

42. Dipping sticks shall be made only of wood, brass or other non-ferrous metal or alloy.

Pump Hoses.

43. Delivery of flammable liquid from any pump to the fuel tank of any vehicle shall be made only through sound hose having an earthing wire in its construction efficiently attached to the metal of the pump and to the metal hose nozzle. Except at an aerodrome or landing ground used by aircraft, no hose attached to any pump shall exceed 4,5 m in length measured from the pump to the tip of the nozzle.

Situation of Filling Pipes and Pumps.

44. Every filling pipe inlet and every pump shall be —

(a) at surface level;

(b) installed in such position that it will not impede the escape of any person or animal from the premises in the case of fire; and

(c) so situated or protected by surrounding walls as not to expose adjoining property to the risk of danger from fire during any filling operations or otherwise.

Naked Lights and Electrical Apparatus.

45.(1) No person shall install or take or cause or permit to be installed or taken any fire, flame, naked light or other agent likely to ignite flammable liquid or its vapour, except an electric light, within 4 m of

(b) 'n opbergtenk te eniger tyd binnegaan nie tensy hy aan 'n reddingstou vas is, wat op die oppervlak onder beheer van 'n betroubare persoon is wat voortdurend let op die veiligheid van die persoon in die opbergtenk.

Ligging van Pompe.

40.(1) Alle pompe en alle ander vultoestelle wat gebruik word of gebruik kan word om vlambare vloeistof na 'n voertuig of houer oor te plaas, of dit daaraan te lewer, moet op private eiendom en minstens 4 m vanaf die grens tussen die private eiendom en 'n openbare plek geleë wees: Met dien verstande dat geen sodanige pomp of vultoestel so opgerig mag wees nie dat 'n pyp vir die uitreiking of oorplasing van vlambare vloeistof op of oor enige openbare plek gebruik kan word nie.

(2) Ondanks enigiets in artikel 3 vervat, is subartikel (1) nie op pompe of vultoestelle wat ten tyde van die inwerkingtreding van hierdie verordeninge alreeds op 'n geregistreerde perseel opgerig is, van toepassing nie indien die beheer oor, of eienaarskap van sodanige perseel verwissel, tensy die ligging van sodanige bestaande pomp of vultoestel gevaarlik is, of gevaarlik kan word, of die openbare of voertuigverkeer belemmer.

Pompe of Opritte.

41. Pompe of ander toestelle wat gebruik word of bedoel is om gebruik te word om vlambare vloeistof aan motorvoertuie of houers te lewer, mag nie op 'n oprit of binne 6 m van die begin van die oprit af, opgerig word nie.

Maatstokke.

42. Maatstokke moet slegs van hout, geelkoper of ander nie-ysterhoudende metaal of allooi gemaak wees.

Pompslange.

43. Die lewering van vlambare vloeistof van 'n pomp af aan die brandstoftenk van 'n voertuig, mag slegs deur middel van 'n heel pompslang geskied, wat voorsien is van 'n aardleiding wat doeltreffend aan die metaal van die pomp en aan die metaaltuit van die pompslang, vasgeheg is. Behalwe in die geval van 'n lughawe of 'n landingsterrein wat deur vliegtuie gebruik word, mag geen pompslang wat aan sodanige pomp vas is, langer as 4,5 m van die pomp af tot by die punt van die tuit wees nie.

Ligging van Vulpype en Pompe.

44. Die inlaatopening van elke vulpyp en elke pomp moet —

(a) gelyk met die grondvlak wees;

(b) sodanig aangebring wees dat dit geen mens of dier in die geval van brand verhinder om van die perseel af weg te kom nie; en

(c) sodanig geleë wees, of so deur middel van ringmure beskerm word dat dit nie die aangrensende eiendom tydens hul werksaamhede of andersins, aan brand blootstel nie.

Oop Ligte en Elektriese Apparate.

45.(1) Niemand mag enige vuur, vlam, oop lig of 'n ander middel wat moontlik vlambare vloeistof of die dampe daarvan aan die brand kan laat slaan, uitgesonderd 'n elektriese gloeilamp, binne 4 m van 'n pomp vir vlambare vloeistof aanbring, daarheen neem, dit

any flammable liquid pump unless such light be of flame proof construction.

(2) No person shall place or cause or permit to be placed any electric switch, fuse, motor or other such device within a distance of 6 m of any pump unless such switch, fuse, motor or device is of flame proof construction.

(3) The electrical wiring between the distribution board or junction box and the pump shall, where possible, be in one continuous length of wire: Provided that where this is not possible, flame proof junction boxes shall be used.

Maintenance of Tanks, Pipe-lines and Pumps.

46.(1) All tanks, pipe-lines, pumps, machinery, fittings and appurtenances for the storage, use or handling of flammable liquid shall be —

(a) of sound and proper construction;

(b) so installed and fixed as not to be liable to be damaged;

(c) efficiently electrically earthed;

(d) free from leakage of flammable liquids, and as far as is reasonably possible, free from leakage of flammable liquid vapour, except by means of a vent pipe; and

(e) maintained in good and proper order and at all times in accordance with the provisions of this section.

(2) All pipe-lines shall be below ground level and at right angles to the building line when crossing a public footpath.

(3) All electrical earth connections required in terms of this section shall be examined once every 12 months by a qualified person who shall enter in a suitable log book, supplied by the occupier of the premises and kept solely for that purpose, the efficiency and conditions of such earth connections, his name and address and the date of examination. All such entries shall be signed by such qualified person and shall be readily available for inspection by any duly authorized officer of the Council.

Construction of Portable Containers.

47. No person shall store or convey or cause or permit to be stored or conveyed in any one container any Class A flammable liquid in a quantity exceeding 50 litres, unless such container is constructed of metal not less than 1,5 mm in thickness.

Filling of Containers.

48. No person shall carry on or cause or permit to be carried on the trade, business or occupation of filling containers with Class A flammable liquid otherwise than in a fire-resisting building adequately ventilated: Provided that such filling may be conducted in the open air if, in the opinion of the Chief Fire Officer, it is not carried out at such a place or in such circumstances that there is a danger either of the liquid or the vapour therefrom becoming ignited; or

daar laat aanbring of daarheen laat neem, of toelaat dat dit geskied nie, tensy sodanige lig van vlamvaste materiaal vervaardig is.

(2) Niemand mag 'n elektriese skakelaar, sekering, motor of ander sodanige toestel, binne 'n afstand van 6 m van 'n pomp af plaas, laat plaas of toelaat dat dit daar geplaas word nie, tensy sodanige skakelaar, sekering, motor of toestel vlamdig vervaardig is.

(3) Die elektriese draadleiding tussen die verdeelbord of die aansluitkas en die pomp moet, waar moontlik, een deurlopende stuk draad wees: Met dien verstande dat indien dit onmoontlik is, vlamdigte aansluitkaste gebruik moet word.

Onderhoud van Tenks, Pypleidings en Pompe.

46.(1) Alle tenks, pypleidings, pompe, masjinerie, toebehore en toestelle vir die opberg, gebruik of hantering van vlambare vloeistof moet —

(a) stewig en sterk gemaak wees;

(b) sodanig aangebring en vasgeheg word dat dit nie moontlik beskadig kan raak nie;

(c) doeltreffend elektries geaard wees;

(d) vry van lekkasie van vlambare vloeistof wees en sover as wat redelikerwys moontlik is, ook nie vlambare vloeistofdampe, uitgesonderd deur middel van 'n lugpypie, laat ontsnap nie; en

(e) te alle tye in 'n behoorlike en goeie toestand, ooreenkomstig die bepalings van hierdie artikel, in stand gehou word.

(2) Alle pypleidings moet onder die grondvlak wees, en moet reghoekig met die boulyn wees waar dit 'n openbare sypaadjie kruis.

(3) Alle elektriese aardsluitings wat kragtens hierdie artikel vereis word, moet een keer elke 12 maande deur 'n gekwalifiseerde persoon ondersoek word, wat in 'n geskikte logboek deur die okkupant van die perseel verskaf, en uitsluitend vir die doel aangehou moet word, aantekeninge in verband met die doeltreffendheid en toestand van sodanige aardsluitings, benewens sy naam en adres en die datum waarop die ondersoek ingestel is, moet inskrywe. Alle sodanige inskrywings moet deur sodanige gekwalifiseerde persoon onderteken word en moet geredelik vir inspeksie deur 'n behoorlikgemagtigde beampte van die Raad beskikbaar wees.

Bou van Draagbare Houers.

47. Niemand mag meer as 50 liter Klas A vlambare vloeistof in een houer opberg of vervoer, laat opberg of vervoer, of toelaat dat dit daarin opgeberg of vervoer word nie, tensy sodanige houer van metaal, minstens 1,5 mm dik, vervaardig is.

Vul van Houers.

48. Niemand mag die bedryf, beroep of besigheid waar houers met Klas A vlambare vloeistof gevul word, uitoefen of dryf, laat uitoefen of dryf of toelaat dat dit geskied nie, uitgesonderd in 'n brandbestande gebou wat toereikend geventileer is: Met dien verstande dat sodanige vulwerk in die buitelug kan geskied indien die Brandweerhoof van mening is dat dit nie op 'n plek of onder omstandighede verrig word waar die gevaar bestaan dat of die vloeistof, of die dampe daarvan, aan die brand kan slaan of dat, indien 'n brand

that, in the event of fire, any structure or building will be endangered or the escape of persons or animals from premises to a place of safety will be obstructed or impeded.

Quantity of Flammable Liquid in Containers.

49. No container shall be filled with flammable liquid to more than 95 per cent of its capacity.

Containers after Delivery.

50. No person taking delivery of any flammable liquid in containers in excess of the quantity stated in section 6 or under circumstances of temporary storage provided for in section 13, shall cause or permit such containers to remain unattended in any place other than a store or storage tank for a longer period than may be reasonably necessary which, in no circumstances, shall exceed a period of 12 hours.

Storage of Empty Containers.

51. (1) No person shall place any empty container or cause or permit any empty container to be placed in any premises other than a store: Provided that —

(a) such container may be stored in the open air in such a position that, in the opinion of the Chief Fire Officer it is, in the event of fire, not likely to obstruct or impede the escape to safety from any premises of persons or animals, or to endanger any room or building;

(b) no person shall cause or allow any empty container to remain in or on any public place.

(2) Every empty container so stored shall at all times be securely closed with a bung or other suitable stopper.

Repairing of Containers.

52. No person shall carry out or permit to be carried out any repair operations to any container until all flammable liquid and flammable liquid vapours have been removed from such container.

Marking of Containers.

53. No person shall supply or deliver to any person any Class A flammable liquid in any container of less than 200 litres capacity, unless such container bears in conspicuous letters the word "FLAMMABLE" in both official languages.

STORES.

Capacity of Stores.

54. The certificate of registration issued in respect of any store shall state the class and maximum quantity of flammable liquid permitted to be kept in such store at any one time.

Danger Notice on Store.

55. No person shall use as such or cause or permit to be used as such any flammable liquid store, unless and until the words "DANGER — FLAMMABLE LIQUID — NO SMOKING" in letters not less than

uitbreek, enige bouwerk of gebou in gevaar gestel word of dat persone of diere verhinder word om van die perseel af na 'n veilige plek te ontkom of dat hulle ontkoming belemmer word nie.

Hoeveelheid Vlambare Vloeistof in Houers.

49. Geen houer mag meer vlambare vloeistof as 95 persent van sy inhoudsvermoë bevat nie.

Houers na Aflewering.

50. Niemand wat meer vlambare vloeistof in houers as die hoeveelheid in artikel 6 aangegee, of vlambare vloeistof vir tydelike opberging, soos bepaal in artikel 13 in ontvangs neem, mag sodanige houers langer as wat redelikerwys noodsaaklik is op enige plek, uitgesonderd in 'n pakkamer of opbergtenk, onbewaak laat bly nie of toelaat dat dit geskied nie, en onder geen omstandighede mag dié tydperk 12 uur oorskry nie.

Opberging van Leë Houers.

51. (1) Niemand mag 'n leë houer in 'n ander perseel as in 'n pakkamer plaas, laat plaas of toelaat dat dit daar geplaas word nie: Met dien verstande dat —

(a) sodanige houer in die buitelug op sodanige plek opgeberg kan word waar dit, na die mening van die Brandweerhoof, in geval van 'n brand, waarskynlik nie persone of diere sal verhinder om van enige perseel af na 'n veilige plek te ontkom, of hulle ontkoming sal belemmer nie, of enige vertrek of gebou in gevaar sal stel nie;

(b) niemand enige leë houer in of op 'n openbare plek mag laat staan of toelaat dat dit daar staan nie.

(2) Elke leë houer aldus opgeberg, moet te alle tye behoorlik met 'n spon of geskikte prop toe wees.

Herstel van Houers.

52. Niemand mag herstelwerk aan 'n houer verrig of toelaat dat dit verrig word, alvorens alle vlambare vloeistof en vlambare vloeistofdampe uit die houer verwyder is nie.

Houer moet Gemerk Wees.

53. Niemand mag aan enigiemand Klas A vlambare vloeistof in 'n houer met 'n kleiner inhoudsvermoë as 200 liter verskaf of aflewer nie, tensy die woord "VLAMBAAR" in opvallende letters in albei amptelike tale op sodanige houer staan.

PAKKAMERS.

Inhoudsvermoë van Pakkamers.

54. Die registrasiesertifikaat wat ten opsigte van 'n pakkamer uitgereik word, moet die klas en die grootste hoeveelheid vlambare vloeistof wat te eniger tyd in sodanige pakkamer gehou mag word, aangee.

Gevaarkennisgewings aan Pakkamers.

55. Niemand mag 'n pakkamer vir vlambare vloeistof as sodanig gebruik, laat gebruik, of toelaat dat dit as sodanig gebruik, laat gebruik, of toelaat dat dit as sodanig gebruik mag word nie tensy en alvorens die woorde "GEVAAR — VLAMBARE VLOEISTOF — MOENIE ROOK NIE" in letters, minstens 150 mm hoog,

150 mm in height in both official languages are prominently displayed in a position where they will be visible from the outside, whether the door is open or closed. Such notice shall at all times be maintained in such position and in a legible condition.

Construction and Situation of Store.

56.(1) Every store shall be constructed in accordance with the following requirements:

(a) The walls shall be constructed of brick or concrete, the floor of concrete or other impervious material, and the roof of reinforced concrete: Provided that the roof may be constructed of other non-combustible material where such store is not likely to endanger any room, building or adjoining premises in case of fire.

(b) The store shall be fitted with a hardwood door of a thickness of not less than 50 mm, completely covered with metal not less than 0,9 mm thick, carried on a metal door frame, or a well fitted metal door of not less than 3 mm thick, carried on an angle frame and having an all-round overlap of not less than 50 mm. Such door shall open outwards and be fitted with a substantial lock. The type of door fitted shall be at the discretion of the Chief Fire Officer.

(c) All window frames shall be constructed of metal, glazed with wire woven glass and shall be of the non-opening type. Each pane shall not exceed 450 mm x 450 mm.

(d) Every store shall be constructed in such a manner or surrounded by walls or bunds of such a character that the flammable liquid contained therein cannot escape therefrom. The well formed by such walls or bunds shall be of sufficient capacity to contain the maximum liquid capacity of the store plus 10 per cent thereof.

(e) The store shall be ventilated in such a manner as will adequately prevent the accumulation of flammable liquid vapour within all parts of such store and discharge the vapour into the open air at a point or points where the vapour is not likely to come into contact with any fire, flame, open light or other agent likely to ignite it. The ventilation may be created by either of the following two methods:

(i) Terra-cotta air-bricks measuring 215 mm by 140 mm shall be built into the wall at a distance of not more than 450 mm on all free walls: Provided that at least two such free walls shall be opposite each other and that the lower edge of such air-bricks shall be at bund level.

(ii) A mechanical system of exhaust ventilation shall be installed should the store be inside a building or where a well is of greater depth than 300 mm or, if in the opinion of the Chief Fire Officer, the store would be inadequately ventilated by means of method (i). Such exhaust apparatus installed shall be of flameproof construction and shall be capable of removing flammable vapour and changing the air through any cross-section of the store at

in albei amptelike tale in 'n opvallende posisie vertoon word waar dit van die buitekant, of die deur oop of toe is, sigbaar is. Sodanige kennisgewing moet te alle tye op sodanige plek in 'n leesbare toestand in stand gehou word.

Bou en Ligging van Pakkamer.

56.(1) Elke pakkamer moet ooreenkomstig die volgende vereistes gebou word:

(a) Die mure moet van baksteen of beton, die vloer van beton of ander syferdigte materiaal, en die dak van gewapende beton gebou wees: Met dien verstande dat die dak van ander nie-brandbare materiaal gebou kan wees, indien sodanige pakkamer in die geval van brand nie moontlik 'n ander kamer, gebou of aangrensende perseel in gevaar sal stel nie.

(b) Die pakkamer moet voorsien wees van 'n hardehoutdeur, minstens 50 mm dik, geheel en al met metaal minstens 0,9 mm dik bedek en aan 'n ysterkosyn bevestig; of van 'n metaaldeur, minstens 3 mm dik, wat goed aan 'n hoekysterkosyn bevestig is en 'n oorslag van minstens 50 mm rondom het. Sodanige deur moet na buitekant toe oopgaan en 'n sterk slot aanhê. Die tipe deur wat gepas word, moet volgens die diskresie van die Brandweerhoof wees.

(c) Alle vensterrame moet van metaal gemaak wees en draadglasruite inhê wat nie oopgemaak kan word nie. Elke ruit moet nie groter as 450 mm x 450 mm wees nie.

(d) Elke pakkamer moet op so 'n wyse gebou wees of deur mure of walle van so 'n aard omring wees dat die vlambare vloeistof daarin nie daaruit kan ontsnap nie. Die put wat deur sodanige mure of walle gevorm word, moet groot genoeg wees om die grootste hoeveelheid vloeistof wat in die pakkamer opgeberg kan word, plus nog 10 persent daarvan, te hou.

(e) Die pakkamer moet sodanig geventileer word dat dit die akkumulasie van vlambare vloeistofdampe op alle plekke in die pakkamer verhoed, en sodanige dampe in die buitelug laat ontsnap by 'n plek of plekke waar sodanige dampe nie moontlik in aanraking met enige vuur, vlam, oop lig of 'n ander middel wat moontlik sodanige dampe aan die brand kan laat slaan, sal kom nie. Die ventilasie kan bewerkstellig word deur middel van enige van die volgende twee metodes:

(i) Terra-cotta lugstene met afmetings van 215 mm by 140 mm moet nie verder as 450 mm uitmekaar in al die buitemure ingebou word: Met dien verstande dat minstens twee van die buitemure teenoor mekaar moet wees en die onderste rand van sodanige lugstene moet op walhoogte aangebring word.

(ii) 'n Meganiese ventilasiestelsel moet geïnstalleer word in die geval waar 'n pakkamer binne 'n gebou geleë is of waar 'n put dieper as 300 mm is of, indien na die mening van die Brandweerhoof, onvoldoende ventilasie deur metode (i) verkry word. Sodanige ventilasiestelsel wat geïnstalleer is, moet van vlamdigte konstruksie wees en in staat wees om minstens 30 maal per uur deur enige dwarssnee van die pakkamer vlambare dampe doeltreffend uit die pak-

least 30 times in every hour. The exhaust vents shall be constructed so as to conform to and comply with the provisions of section 103(1)(h). The exhaust system and lighting for the store shall be operated by means of a courtesy switch fitted to the door of such store.

(f) All air-bricks shall be protected by non-corrodible wire gauze with a mesh aperture not exceeding 600 microns.

(g) A store shall not be situated in such a position that it will impede the escape of any person or animal from the premises, or endanger any room, building, or premises in the case of fire.

(h) Any store with a floor area in excess of 10 m² shall be provided with at least two doors, constructed as described in paragraph (b), situated at such distance from each other as to allow the free and unimpeded escape of persons within the store from either door in the case of fire or other hazard.

(2) Subject to the requirements of section 4 and notwithstanding anything to the contrary contained in these by-laws, a store may be constructed of non-combustible material if —

(a) such store has no building nearer to it than a minimum of 30 m; and

(b) it is surrounded by the necessary wall or impervious bund as provided in subsection (1)(a).

(3) Every store shall be maintained at all times in accordance with the provisions of this section.

Lighting of Store.

57. All lights installed shall be enclosed in an outer flame-proof fitting and all wiring shall be armoured cable or enclosed in seamless metal tubes the junctions of which are screwed together. All switches, junction boxes, fuses and other electrical equipment shall be outside the store.

Use of Store.

58. No person shall —

(a) use any store or cause or permit such store to be used for any purposes other than the storage, use or handling of flammable liquids and substances;

(b) engage in or cause or permit any other person to be engaged in any store unless all the doors of the store are fully open and kept entirely unobstructed.

Unauthorized Persons Entering Store.

59. No person shall enter any store or cause or permit any store to be entered without the express permission of the occupier or other responsible person in charge of such store.

BULK DEPOTS.

Danger Notice at Entrance.

60. Prominent notice boards bearing the words "DANGER — FLAMMABLE LIQUID — NO SMOKING" in letters not less than 150 mm in height

kamer te verwyder en die lug daarin te verander. Die ventilasieopeninge moet sodanig ontwerp wees dat dit aan die vereistes van artikel 103(1)(h) voldoen. Die ventilasiestelsel en ligte van die pakkamer moet beheer word vanaf 'n sekeringskakelaar wat aan die deur gemonteer is.

(f) Alle lugstene moet deur middel van gaasdraad met openings van nie meer nie as 600 mikrone grootte en wat teen roes bestand is, beskerm word.

(g) 'n Pakkamer mag nie so geleë wees dat dit, in die geval van brand, enige persoon of dier sal verhinder om van die perseel af te ontsnap, of enige vertrek, gebou, of perseel in gevaar sal stel nie.

(h) 'n Pakkamer met 'n groter vloeroppervlakte as 10 m² moet minstens twee deure inhê, vervaardig soos beskryf in paragraaf (b), en wat op sodanige afstand van mekaar af is dat persone in die pakkamer, in die geval van brand of ander gevaar, vry en onbelemmerd deur enige van die deure kan ontsnap.

(2) Onderworpe aan die bepalings van artikel 4 en ondanks andersluidende bepalings in hierdie verordeninge vervat, kan 'n pakkamer van nie-brandbare materiaal gebou word, indien—

(a) daar geen gebou nader as 30 m van die pakkamer af staan nie;

(b) dit omring is deur die vereiste muur of die syferdigte wal, soos in subartikel (1)(a) bepaal.

(3) Elke pakkamer moet te alle tye ooreenkomstig die bepalings van hierdie artikel onderhou word.

Beligting van Pakkamer.

57. Alle ligte wat aangebring word, moet 'n vlamdigte buiteomhulsel hê, en alle draadleidings moet gepantserde kabels wees, of moet in naatlose metaalbuise waarvan die lasse vasgeskroef word, ingesluit wees. Alle skakelaars, aansluitkaste, sekerings en ander elektriese toerusting moet buite die pakkamer geleë wees.

Gebruik van Pakkamer.

58. Niemand mag —

(a) 'n pakkamer gebruik, laat gebruik, of toelaat dat dit gebruik word vir enige ander doel as om vlambare vloeistowwe en stowwe daarin op te berg, te gebruik of te hanteer nie;

(b) iemand anders in 'n pakkamer in diens hê of veroorsaak of toelaat dat hy daar in diens is nie, tensy al die deure van die pakkamer heeltemal oopstaan of geheel en al onversper gehou word.

Ongemagtigde Persone wat 'n Pakkamer Binnegaan.

59. Niemand mag 'n pakkamer binnegaan, iemand dit laat binnegaan of toelaat dat iemand dit binnegaan sonder die uitdruklike toestemming van die okkupant of 'n ander verantwoordelike persoon in beheer van sodanige pakkamer nie.

GROOTMAATDEPOTS.

Gevaarkennisgewings by die Ingang.

60. Opvallende kennisgewings met die woorde "GEVAAR — VLAMBARE VLOEISTOF — MOENIE ROOK NIE" duidelik in albei amptelike tale daarop, in

in both official languages shall be erected at all entrances to bulk depots and shall at all times be maintained in such position and in a legible condition.

Storage.

61.(1) Flammable liquid shall be stored in bulk depots as follows:

(a) Underground storage tanks.

(b) Aboveground storage tanks.

(c) Bulk stores.

(2)(a) Every such above-ground storage tank or group of such tanks with a total capacity of over 55 kl, shall be surrounded by either an embankment (hereinafter called a retaining embankment), or a retaining wall of brick and cement or reinforced or plain concrete (hereinafter called a retaining wall), so designed and constructed as to form a reservoir capable of containing and retaining the quantity of liquid required to be retained in accordance with paragraph (e): Provided that the top of such retaining embankment or retaining wall shall be at least 75 mm higher than is necessary to contain and retain such quantity of liquid.

(b) The retaining embankment shall be at least 600 mm thick at the top with slopes on each side of 1,5 to 1. Such embankment shall be constructed with a central core of concrete not less than 200 mm thick at the top with a slope on each side of 1 in 24 to the level of the interior of the area enclosed. The core, of the same thickness as at this level, shall be taken down to such a depth, depending on the nature of the soil, as will effectually prevent any leakage of liquid. The earthwork around the core shall be composed of materials well watered and consolidated.

(c) The retaining wall shall be constructed in accordance with the following requirements:

(i) It shall be capable of resisting the full overturning movement of the liquid in the enclosed reservoir when filled to within 75 mm of the top with a liquid of the same specific gravity as water.

(ii) If such wall constitutes a partition between two reservoirs, it shall be capable of withstanding thrust from either side.

(iii) Every retaining wall shall be taken down to such depth and be provided with such foundations, depending on the nature of the soil, as will ensure stability in all respects and effectually prevent any leakage of liquid.

(iv) Every retaining wall of reinforced concrete shall not be less than 150 mm thick at the top and the tensible portion of the stresses shall be wholly taken up by steel rods placed, not nearer the surface thereof than 50 mm.

(v) The concrete stress shall not exceed 4,8 Megapascal and the stress in the steel 110 Megapascal under fully loaded conditions.

(d) Adequate provision shall be made to dispose of any water which may be retained by any such retaining embankment or wall. Any drain pipe through such

letters minstens 150 mm hoog, moet by al die ingange na die grootmaatdepots opgerig word, en moet te alle tye op die plekke in 'n leesbare toestand in stand gehou word.

Opberging.

61.(1) Vlambare vloeistof moet soos volg in grootmaatdepots opgeberg word:

(a) In ondergrondse opbergtenks.

(b) In bogrondse opbergtenks.

(c) In grootmaatpakhuise.

(2)(a) Elke sodanige bogrondse opbergtenk of groep sodanige tenks met 'n totale inhoudsvermoë van meer as 55 kl moet of deur 'n wal (hierna 'n steunwal genoem) of deur 'n steunmuur van baksteen en sement of van gewapende of ongewapende beton (hierna 'n steunmuur genoem) omring wees, sodanig ontwerp en gebou dat dit 'n reservoir vorm wat in staat is om die hoeveelheid vloeistof, wat ooreenkomstig paragraaf (e) daarin gehou moet word, te bevat en te behou: Met dien verstande dat die kruin van sodanige steunwal of steunmuur minstens 75 mm hoër moet wees as wat noodsaaklik is om sodanige hoeveelheid vloeistof te bevat en te behou.

(b) Die steunwal moet bo minstens 600 mm dik wees, met 'n helling aan elke kant van 1,5 op 1. Sodanige walle moet gebou word met 'n betonkern wat bo minstens 200 mm dik is, en met 'n helling aan elke kant van 1 op 24 tot op die vlak van die binnekant van die ingeslote ruimte. Die kern moet met dieselfde dikte as wat dit op hierdie vlak het, na gelang van die soort grond, so diep afgevoer word dat dit doeltreffend sal voorkom dat enige vloeistof uitlek. Die grondwal om die kern moet van materiaal wees wat deeglik natgemaak en vasgestamp is.

(c) Die steunmuur moet ooreenkomstig die volgende vereistes gebou word:

(i) Dit moet in staat wees om die hele kantelingsmoment van die vloeistof wat in die ingeslote reservoir is wanneer dit tot 75 mm van bo af volgemaak is met vloeistof met dieselfde soortlike gewig as water, te kan weerstaan.

(ii) Indien sodanige muur 'n afskorting tussen twee reservoirs vorm, moet dit in staat wees om die drukking van beide kante af te kan weerstaan.

(iii) Elke steunmuur moet, na gelang van die soort grond, so diep afgevoer word en sodanige fondamente hê, dat dit in alle opsigte stewig is en doeltreffend sal voorkom dat vloeistof uitlek.

(iv) Elke steunmuur van gewapende beton moet bo minstens 150 mm dik wees, en die trekspanning moet heeltemal deur staalstawe, hoogstens 50 mm van die oppervlak daarvan af aangebring, opgeneem word.

(v) Die betonspanning moet nie 4,8 Megapascal en die spanning in die staal 110 Megapascal onder belasting, oorskry nie.

(d) Daar moet voldoende voorsorg getref word om water wat deur sodanige steunwalle of mure opgedam mag word, af te voer. Enige afvoerpyp deur sodanige wal of muur moet met 'n gietysterklep aan die buitekant voorsien wees wat, behalwe wanneer dit gebruik word, toe en behoorlik gesluit gehou moet word.

embankment or wall shall be fitted with a cast iron valve on the outside which, except when in use, shall be kept closed and adequately locked.

(e) The retaining capacity of such enclosed reservoir surrounding any tank or group of tanks shall be as follows:

(i) Not less than 90 per cent of the total capacity of such tank where there is not more than one tank within such enclosed reservoir:

(ii) Not less than 80 per cent of the total capacity of such tanks where there are two tanks within the same enclosed reservoir:

(iii) Not less than 75 per cent of the total capacity of all such tanks where there are more than two tanks within the same enclosed reservoir:

Provided that the retaining capacity of the enclosed reservoir surrounding any tank or group of tanks need not be greater than at least 50 per cent of the total capacity of the tank or tanks, as the case may be, if such tank or group of tanks are constructed with a floating roof or provided with any other type of roof which effectively eliminates any space above the level of the liquid in such tank or group of tanks and is approved by the Council.

(f) The area enclosed by such retaining embankment or wall not occupied by any storage tank shall, except for the purpose of carrying out repairs, alterations or additions to such tanks, be kept entirely free and unoccupied.

(g) The provisions in terms of paragraphs (b) and (c) shall not apply to any existing reservoir in use at the date of publication of these by-laws.

(3) Every bulk store shall be constructed so as to conform with the provisions of section 56, except paragraph (d). The well formed by walls or bunds shall in this instance be of sufficient capacity to contain 50 per cent of the total quantity of liquid contained therein.

Tank Distances.

62. All storage tanks shall, in regard to the sizes set out in the first column hereunder, be separated from the boundary of the bulk depot and from each other by the distances set out in the second and third columns hereunder respectively:

	Capacity of Tank	*Distance from Boundary*	*Distance between Tanks*
	kl	m	m
Up to	60	6	1
Up to	100	8	1
Up to	150	9	1,5
Up to	200	11	3
Up to	300	12	4,5
Up to	400	14	5,5
Up to	500	15	6
Up to	1 000	15	8
Up to	2 500	15	9
Up to	5 000	15	12
Over	5 000	15	15

(e) Die stukapasiteit van sodanige ingeslote reservoir wat enige tenk of groep tenks omring, moet soos volg wees:

(i) Minstens 90 persent van die totale inhoudsvermoë van sodanige tenk indien daar hoogstens een tenk binne sodanige ingeslote reservoir is.

(ii) Minstens 80 persent van die totale inhoudsvermoë van sodanige tenks indien daar twee tenks binne dieselfde ingeslote reservoir is.

(iii) Minstens 75 persent van die totale inhoudsvermoë van al sodanige tenks indien daar meer as twee tenks binne dieselfde ingeslote reservoir is:

Met dien verstande dat die stukapasiteit van die ingeslote reservoir, wat enige tenk of groep tenks omring, nie meer as minstens 50 persent van die totale inhoudsvermoë van die tenk of tenks, na gelang van die geval, hoef te beslaan nie indien die tenk of tenks met 'n drywende of ander soort dak gebou is wat enige ruimte bokant die vlak van die vloeistof in die tenk of tenks op doeltreffende wyse elimineer en deur die Raad goedgekeur is.

(f) Die ruimte wat deur sodanige steunwal of -muur omring word, en wat nie deur 'n opbergtenk in beslag geneem word nie, moet uitgesonderd met die doel om herstelwerk te verrig of veranderings of toevoegings aan sodanige tenks aan te bring, heeltemal vry en onbeset gehou word.

(g) Die bepalings ingevolge paragrawe (b) en (c), is nie van toepassing op enige bestaande reservoir wat op die datum van afkondiging van hierdie verordeninge, in gebruik is nie.

(3) Elke grootmaatpakhuis moet sodanig ontwerp word dat dit aan die bepalings van artikel 56, uitgesonderd paragraaf (d), voldoen. Die putte wat deur mure of walle gevorm word, moet in hierdie geval van voldoende kapasiteit wees om 50 persent van die totale hoeveelheid vloeistof wat daarin is, te behou.

Afstande van Tenks.

62. Alle opbergtenks moet, met betrekking tot die grootte, wat in die eerste kolom hieronder aangegee word, onderskeidelik die afstande wat in die tweede en derde kolomme hieronder aangegee word, van die grens van die grootmaatdepot en van mekaar af verwyder wees:

	Inhoudsvermoë van Tenk	*Afstand van die Grens*	*Afstand tussen die Tenks*
	kl	m	m
Tot	60	6	1
Tot	100	8	1
Tot	150	9	1,5
Tot	200	11	3
Tot	300	12	4,5
Tot	400	14	5,5
Tot	500	15	6
Tot	1 000	15	8
Tot	2 500	15	9
Tot	5 000	15	12
Bo	5 000	15	15

Provided that —

(a) where tanks of varying capacities are to be grouped, the distances from the boundaries shall be observed but the distances between individual tanks shall be not less than the sum of the specified distance for each size of tank divided by 2;

(b) no building or structure shall be erected for the filling of containers with flammable liquids within 15 m of any storage tank or within 7,5 m of the boundary of any bulk depot; and

(c) where bulk depots belonging to different persons are situated on adjoining sites, the distance between any tank and their common boundary shall be half that prescribed for such tank in the second column above.

Electric Motors.

63. No person shall place or cause or permit to be placed any electric motor in any position where it is likely to come into contact with any flammable liquid or its vapour unless such motor is of flame-proof construction.

Fire Appliances.

64.(1) Every bulk depot shall be connected to the municipal water supply by means of a lead with a diameter of not less than a 100 mm.

(2) A fire pump connection for each fire service shall be installed in a position approved by the Council and within easy access of a street hydrant.

(3) A reflux valve to shut off the supply from the street mains when the pump connection is being used shall be fitted between the stand boundary and the pump connection.

(4) Standard pattern wheel valve hydrants fitted with instantaneous couplings with a diameter of 65 mm shall be located in positions approved by the Council and adjacent to buildings and tanks used for flammable liquid storage, at the rate of one for every 500 m² of floor area and one within 90 m of each bulk storage tank.

(5) 65 mm canvas fire hose and branch pipes with 19 mm nozzles of sufficient length for the adjacent area which is served by such hydrants shall be provided.

(6) Wheeled dry chemical type extinguishers of not less than 45 kg capacity, or other similar types of extinguishers, shall be installed where deemed necessary by the Council. Every building used for the storage of flammable liquid or flammable substances shall be provided with dry chemical type fire extinguishers with a capacity of not less than 9 kg each at the rate of one for every 500 m² of floor area.

(7) An adequate system of alarm in case of fire (such as bells, whistles or sirens) shall be installed.

(8) All persons employed at or in the bulk depot shall be periodically instructed in the use of all fire appliances.

Met dien verstande dat —

(a) indien tenks van verskillende inhoudsvermoë saam gegroepeer moet word, die afstande van die grense af gehandhaaf moet word, maar die afstand tussen afsonderlike tenks minstens gelyk moet wees aan die totaal van die gespesifiseerde afstande ten opsigte van elke grootte tenk, gedeel, deur 2;

(b) geen gebou of bouwerk, wat bedoel is om houers met vlambare vloeistof in vol te maak, binne 15 m van 'n opbergtenk af, of binne 7,5 m van die grens van 'n grootmaatdepot af, opgerig mag word nie; en

(c) waar grootmaatdepots aan verskillende persone op aangrensende persele behoort, die afstand tussen enige tenk en hul gemeenskaplike grens die helfte van die afstand moet wees soos voorgeskryf vir sodanige tenk in kolom twee hierbo.

Elektriese Motore.

63. Niemand mag 'n elektriese motor op 'n plek waar dit moontlik in aanraking met vlambare vloeistof of dampe daarvan kan kom, plaas, laat plaas of toelaat dat dit daar geplaas word nie, tensy sodanige motor van vlamdigte konstruksie is.

Brandblustoestelle.

64.(1) Elke grootmaatdepot moet deur middel van 'n waterleiding van minstens 100 mm deursnit met die watertoevoer van die munisipaliteit verbind wees.

(2) 'n Brandspuitverbinding moet ten opsigte van elke brandbestrydingsleiding aangebring word op 'n plek deur die Raad goedgekeur, en binne maklike bereik van 'n straatbrandkraan.

(3) 'n Terugslagklep om die toevoer van die straathoofleidings af te sluit wanneer die brandspuitverbinding gebruik word, moet tussen die grens van die standplaas en die brandspuitverbinding aangebring word.

(4) Standaard-wielklepbrandkrane wat voorsien is van blitsaankoppelinge met 'n middellyn van 65 mm, moet op plekke, deur die Raad goedgekeur, langs geboue en tenks, wat vir die opberging van vlambare vloeistof gebruik word, aangebring word teen een per elke 500 m² vloeroppervlakte, en een binne 90 m van elke grootmaatopbergtenk af.

(5) 'n 65 mm seilbrandslang en vertakkingspype met 19 mm tuite en lank genoeg om die aangrensende gebied te bereik, wat deur sodanige brandkraan bedien word, moet verskaf word.

(6) Brandblustoestelle van die chemiese tipe met wiele en met 'n inhoudsvermoë van minstens 45 kg, of ander soortgelyke tipe brandblustoestelle, moet aangebring word waar dit deur die Raad nodig geag word. Elke gebou wat vir die opberg van vlambare vloeistof of vlambare stowwe gebruik word, moet met droë chemiese brandblustoestelle met 'n inhoudsvermoë van minstens 9 kg elk teen een vir elke 500 m² vloeroppervlakte, voorsien word.

(7) 'n Doeltreffende alarmstelsel (soos byvoorbeeld klokke, fluite of sirenes) moet vir gebruik in geval van brand aangebring word.

(8) Almal wat by of in die grootmaatdepot in diens is, moet van tyd tot tyd in die gebruik van alle brandblustoestelle onderrig word.

Filling of Road Tank Wagons.

65. The filling of a road tank wagon with flammable liquid shall not be commenced or carried out at a bulk depot by any person—

(a) at a lesser distance than 7,5 m from any storage tank or building above ground or boundary of such depot;

(b) unless and until all pipes have been efficiently earthed; or

(c) unless good and sufficient metallic contact has been made and is maintained between such road tank wagon and the metal pipe-line to prevent the building up of a static charge of electricity on such tank wagon.

Starting of Engine at Filling Point.

66. No person shall at a bulk depot start, or cause or permit to be started the engine of a road tank wagon or any mechanically propelled vehicle if such road tank wagon or vehicle is within 6 m of any place where filling operations are taking place not under seal or in any place in which such wagon or vehicle comes or is likely to come into contact with flammable liquid or its vapour.

Steam Engines.

67. Where it is necessary for steam locomotives to enter a bulk depot, the occupier shall erect a notice board bearing the words "LOCOMOTIVES MUST NOT PASS THIS POINT" in letters not less than 150 mm in height in both official languages. The board shall be placed in a conspicuous position at a distance of not less than 15 m from any operation dealing with flammable liquids or storage thereof. No flammable liquid or open container containing flammable vapour shall be placed or stored at a distance of less than 15 m from any portion of the track which may be traversed by a steam locomotive.

Admission to Depots.

68. No person shall—

(a) enter any bulk depot without the express permission of the occupier or the person authorized by the occupier to be in charge of such depot;

(b) enter any bulk depot in possession of any matches, cigarette lighter or similar contrivance; or

(c) commit any act which is liable or calculated to cause fire or explosion or to endanger the depot or its contents.

Supervision of Depots.

69. The occupier of a bulk depot shall ensure that a responsible person duly authorized thereto, shall at all times during working hours be on duty at such depot to ensure against fire hazards or other contingencies which may be a danger to life or property, and that a reliable watchman is always on duty at the depot after normal working hours.

Vul van Padtenkvoertuig.

65. Niemand mag 'n padtenkvoertuig by 'n grootmaatdepot met vlambare vloeistof volmaak of begin volmaak nie—

(a) op 'n kleiner afstand as 7,5 m van 'n opbergtenk of gebou bokant die grond, of van die grens van sodanige depot af nie;

(b) tensy en alvorens alle pype doeltreffend geaard is nie; of

(c) tensy 'n behoorlike en doeltreffende metaalaansluiting tussen sodanige padtenkvoertuig en die metaalpypleiding bewerkstellig en onderhou word, ten einde te voorkom dat 'n lading statiese elektrisiteit in sodanige vragmotor opgebou word.

Aanskakel van Enjin by Volmaakplek.

66. Niemand mag die enjin van 'n padtenkvoertuig of enige voertuig wat meganies aangedryf word, by 'n grootmaatdepot aan die gang sit, dit aan die gang laat sit, of toelaat dat dit aan die gang gesit word, indien sodanige padtenkvoertuig of voertuig binne 6 m van 'n plek af is waar die vulwerksaamhede nie by wyse van verseëlde oorplasing geskied nie, of 'n plek waar sodanige vragmotor of voertuig in aanraking met vlambare vloeistof of dampe daarvan kom of moontlik kan kom nie.

Stoomlokomotiewe.

67. Waar dit vir 'n stoomlokomotief nodig is om 'n grootmaatdepot binne te gaan, moet die okkupant 'n kennisgewing met die woorde "LOKOMOTIEWE MAG NIE BY HIERDIE PUNT VERBYGAAN NIE" in letters minstens 150 mm hoog, in albei amptelike tale aanbring. Die kennisgewing moet op 'n opvallende plek minstens 15 m van die plek waar daar met vlambare vloeistof gewerk of waar dit opgeberg word, opgerig word. Geen vlambare vloeistof of oop houer wat vlambare dampe bevat, mag nader as 15 m van enige gedeelte van die pad waaroor 'n stoomlokomotief loop, geplaas of opgeberg word nie.

Toegang tot Depots.

68. Niemand mag—

(a) 'n grootmaatdepot sonder die uitdruklike toestemming van die okkupant of van die persoon wat deur die okkupant gemagtig is om oor sodanige depot toesig te hou, binnegaan nie;

(b) 'n grootmaatdepot binnegaan terwyl hy in besit is van vuurhoutjies, sigaretopsteker, of soortgelyke toestelle nie; of

(c) 'n daad verrig wat moontlik brand of 'n ontploffing kan veroorsaak, of wat die depot of sy inhoud in gevaar kan stel, of wat bereken is om dit te doen nie.

Toesig oor Depots.

69. Die okkupant van 'n grootmaatdepot moet sorg dra dat 'n verantwoordelike persoon, behoorlik daartoe gemagtig, ononderbroke gedurende werksure by so 'n depot aan diens is ten einde voorsorg teen brand of ander gebeurlikhede wat lewens of eiendom in gevaar kan stel, te tref, en moet sorg dra dat 'n betroubare oppasser altyd na gewone werksure by die depot waghou.

TRANSPORT OF FLAMMABLE LIQUID.

Transport Permit.

70. Save as provided in section 80, no person shall use or cause or permit to be used in or on any public place any vehicle for the conveyance of flammable liquid within the municipality unless and until he is in possession of a transport permit issued to him by the Council in respect of such vehicle, or a permit issued to him by any other local authority.

Issue of Transport Permit.

71.(1) No transport permit shall be granted in respect of any vehicle unless and until such vehicle—

(a) has been exhibited for examination at such place as the Council may direct, and the examination charge, as prescribed in Schedule 2 hereto has been paid;

(b) complies with the conditions of fitness relating to such vehicle in terms of the Road Traffic Ordinance, 1966, and any regulations promulgated thereunder; and

(c) complies with the requirements of section 72.

(2) Such transport permit shall—

(a) continue in force for a period of six months or such lesser period as may be stated in such permit;

(b) specify the maximum quantity and class of flammable liquid which such vehicle shall be permitted to carry;

(c) be affixed to the vehicle in respect of which such transport permit was issued and to no other vehicle; and

(d) be maintained on such vehicle in a good and legible condition by the owner or person in control of such vehicle in a position so as to be plainly visible.

Construction and Capacity of Vehicles.

72.(1) Every vehicle used for the purpose of transporting flammable liquids by road, in these by-laws referred to as a road tank wagon, shall comply with the following requirements and the word "tank" in these by-laws means a tank carried on such a vehicle for the aforesaid purpose:

(a) The vehicle shall be strongly constructed and as far as is reasonably possible shall be constructed of non-combustible material.

(b) Where electric lighting or other electric devices are employed, the electrical circuit shall be heavily insulated and the wiring so fixed and protected as to reduce as far as reasonably possible any risk of damage. The generator, battery, fuses or switches shall not be situated in any position where they are likely to come into contact with any flammable liquid or its vapour.

(c) The tank shall be constructed of iron, steel or other suitable metal and riveted, welded, brazed or other-

VERVOER VAN VLAMBARE VLOEISTOF.

Vervoerpermit.

70. Behoudens die bepalings van artikel 80, mag niemand 'n voertuig vir die vervoer van vlambare vloeistof op 'n openbare plek binne die munisipaliteit gebruik, laat gebruik of toelaat dat dit gebruik word nie, tensy en alvorens hy in besit van 'n vervoerpermit is, wat die Raad ten opsigte van sodanige voertuig aan hom uitgereik het, of 'n permit wat deur enige ander plaaslike bestuur aan hom uitgereik is.

Uitreiking van Vervoerpermit.

71.(1) Geen vervoerpermit ten opsigte van 'n voertuig word uitgereik nie, tensy en alvorens sodanige voertuig—

(a) na sodanige plek wat die Raad kan aanwys, gebring is om ondersoek te word en die ondersoekgeld soos voorgeskryf in Bylae 2 hierby, betaal is;

(b) aan die voorwaardes ten opsigte van geskiktheid wat op sodanige voertuig betrekking het, ingevolge die Ordonnansie op Padverkeer, 1966, en enige regulasies ingevolge daarvan afgekondig, voldoen; en

(c) aan die vereistes van artikel 72 voldoen.

(2) Sodanige vervoerpermit—

(a) is van krag vir 'n tydperk van ses maande of sodanige korter tydperk wat op die permit vermeld word;

(b) moet die grootste hoeveelheid asook die klas vlambare vloeistof wat sodanige voertuig toegelaat word om te vervoer, vermeld;

(c) moet aan die voertuig ten opsigte waarvan dit uitgereik is, en aan geen ander voertuig nie, vasgeheg word; en

(d) moet deur die eienaar of persoon wat die voertuig onder sy sorg het in 'n goeie en leesbare toestand onderhou word op 'n plek op die voertuig waar dit duidelik sigbaar is.

Bou en Inhoudsvermoë van Voertuie.

72.(1) Elke voertuig wat gebruik word met die doel om vlambare vloeistowwe per pad te vervoer, in hierdie verordeninge 'n padtenkvoertuig genoem, moet aan die volgende vereistes voldoen, en die woord "tenk" beteken in hierdie verordeninge die tenk wat op sodanige voertuig vir voormelde doel gedra word:

(a) Die voertuig moet sterk gebou wees, en so ver redelikerwys moontlik, van nie-brandbare materiaal vervaardig wees.

(b) Indien daar van elektriese verligting of ander elektriese toestelle gebruik gemaak word, moet die elektriese stroomleiding dig geïsoleer wees, en die bedrading op sodanige wyse aangebring en beskerm word, dat dit sover moontlik die gevaar van beskadiging uitskakel. Die ontwikkelaar, battery, smeltdrade of skakelaars moet nie op 'n plek aangebring word waar hulle moontlik in aanraking met vlambare vloeistof of dampe daarvan kan kom nie.

(c) Die tenk moet van yster, staal of 'n ander geskikte metaal vervaardig wees en moet met naels vas-

wise made liquid-tight. Where aluminium alloys are used, the tank shall be constructed in accordance with the specifications detailed in section 385 of Volume 1 of the National Fire Codes issued by the National Fire Protection Association.

(d) Means of cutting off the electrical current close to the battery by a double pole switch or other suitable method shall be provided.

(e) Any tank having a capacity exceeding 6 kl shall be divided into liquid-tight compartments, each compartment to be of a capacity of not more than 6 kl: Provided that the aforesaid maximum capacity of 6 kl may be exceeded by not more than five per cent if the exigencies of construction make such excess necessary; Provided further that the liquid contents of any such compartment shall at no time exceed 98 per cent of the total capacity of the compartment.

(f) The tank shall be securely attached to and in metal contact with the vehicle.

(g) The draw-off pipes of the tank shall be fitted with two independent valves situated at remote points from one another.

(h) Efficient ventilated openings shall be fitted to each tank compartment and all such openings shall be covered with fine wire gauze with a mesh aperture not exceeding 600 microns and provided with a cock or valve: Provided that the Chief Fire Officer may permit the installation of other types of ventilating openings where these are shown to be equally efficient.

(i) Adequate provision shall be made to earth such vehicle efficiently so as to prevent the accumulation of a dangerous static charge of electricity in any part thereof, and, in addition, each pipe connection to the tank shall be so fitted as to ensure complete electrical connection between the tank and any receptacle being supplied with liquid therefrom.

(j) All electrical earth connections required in terms of this section shall be examined and entered in a logbook as required in terms of section 46(3) and the provisions of the said section shall *mutatis mutandis* apply.

(k) The total quantity of flammable liquid conveyed by any road tank wagon or any number of such wagons constituting one haul shall, subject to the provisions of section 71, not exceed 30 kl.

(2) Every vehicle other than a road tank wagon shall be —

(a) of adequate capacity and construction to convey safely the quantity of flammable liquid which it is desired to convey on such vehicle;

(b) equipped with at least four wheels: Provided that a trailer forming part of an articulated vehicle shall for the purpose hereof be deemed to be equipped with four wheels; and

geklink, gesweis, hardgesoldeer of andersins vloeistofdig gemaak word. Waar van aluminiumallooie gebruik gemaak word, moet die tenk gebou word volgens die spesifikasies, soos omskryf in artikel 385, Volume 1 van die "National Fire Codes" uitgereik deur die "National Fire Protection Association".

(d) Daar moet gesorg word dat die elektriese stroom deur middel van 'n tweepolige skakelaar of ander geskikte metode naby die battery afgeskakel kan word.

(e) 'n Tenk met 'n inhoudsvermoë van meer as 6 kl, moet afgeskort word in vloeistofdigte vakke en geen vak mag 'n groter inhoudsvermoë as 6 kl bevat nie: Met dien verstande dat voorgaande maksimum inhoudsvermoë van 6 kl met hoogstens vyf persent oorskry kan word indien sodanige oorskryding deur die konstruksievereistes genoodsaak word: Voorts met dien verstande dat die vloeistofinhoud van enige sodanige vak te gener tyd meer as 98 persent van die totale inhoudsvermoë van die vak mag oorskry nie.

(f) Die tenk moet stewig aan die voertuig vasgesit word, en in regstreekse aanraking met die metaal daarvan wees.

(g) Die afvoerpype van die tenk moet voorsien wees van twee afsonderlike kleppe wat ver van mekaar geplaas is.

(h) Daar moet doeltreffende ventileeropeninge in elke tenkvak aangebring word, en elke sodanige opening moet bedek word met fyn gaasdraad met 'n maasopening van minstens 600 mikrone en moet van 'n kraan of klep voorsien wees: Met dien verstande dat die Brandweerhoof kan toelaat dat ander soorte ventileeropeninge aangebring word, indien daar bewys is dat hulle ewe doeltreffend is.

(i) Sodanige voertuig moet van 'n doeltreffende aardleiding voorsien word ten einde te voorkom dat 'n gevaarlike lading statiese elektrisiteit in enige gedeelte daarvan opgebou word en boonop moet elke pypverbinding met die tenk so aangebring word dat daar volkome elektriese verbinding tussen die tenk en enige houer wat daaruit met vloeistof gevul word, bewerkstellig word.

(j) Alle elektriese aardleidings wat kragtens hierdie artikel vereis word, moet ondersoek en aangeteken word in 'n logboek, soos bepaal in artikel 46(3) en die bepalings van genoemde artikel is *mutatis mutandis* van toepassing.

(k) Behoudens die bepalings van artikel 71, mag die totale hoeveelheid vlambare vloeistof, wat enige padtenkvoertuig of enige aantal sodanige voertuie wat een trek uitmaak, vervoer, nie 30 kl oorskry nie.

(2) Elke voertuig, uitgesonderd 'n padtenkvoertuig moet —

(a) groot en sterk genoeg wees om die hoeveelheid vlambare vloeistof wat op sodanige voertuig vervoer moet word, veilig te vervoer;

(b) minstens vier wiele hê: Met dien verstande dat geag word 'n sleepwa wat deel van 'n gelede voertuig uitmaak, vir die toepassing hiervan, van vier wiele voorsien is; en

(c) so constructed and equipped as not to be likely to ignite any flammable liquid which may be conveyed in or on such vehicle.

Maintenance of Vehicles.

73. No person shall use or cause or allow to be used in or on any public place any vehicle for the transport of flammable liquid, unless such vehicle is maintained in good condition and in proper working order.

Opening to Tank.

74. All openings to the tank of any vehicle used for the transport of flammable liquid shall be kept securely and effectively closed at all times when not in use.

Supervision of Road Tank Wagon by Responsible Person.

75.(1) Every road tank wagon shall be under the constant supervision of a responsible person during the period such wagon is in use as such anywhere other than at a bulk depot.

(2) No road tank wagon which is not self-propelled and no other non-self-propelled vehicle, so long as it is loaded with any flammable liquid, shall be taken to or allowed to remain on any premises unless there is on the same premises at the same time a vehicle capable of and properly equipped for immediately towing it away from the premises.

(3) No road tank wagon or vehicle which is not self-propelled shall be allowed to remain in or on any street or other public place except for the minimum period necessary for unloading it and unless it is properly, firmly and directly connected to a vehicle capable of and properly equipped for immediately towing it away.

Position of Road Tank Wagon During Delivery Operations.

76.(1) No person shall—

(a) cause or permit a road tank wagon to stand on or across any public footpath during delivery operations;

(b) place the hose or cause or permit the hose to be placed across such footpath during such operations; or

(c) cause or permit a road tank wagon to reverse onto or off any premises before or after delivery operations to such premises.

(2) Should it not be possible to comply with the provisions of subsection (1), the Council may permit the installation of an underground kerbside filling point, which shall be installed and maintained to the satisfaction of the Council.

Fire Extinguishers.

77.(1) No person shall use or cause or permit to be used any vehicle for the conveyance of flammable liquid, unless such vehicle is provided with at least two fire extinguishers which shall be of the dry chemical type and have a capacity of not less than 9 kg each:

(c) sodanig gebou en toegerus wees dat dit nie waarskynlik vlambare vloeistof wat in of op sodanige voertuig vervoer word, sal laat ontbrand nie.

Onderhoud van Voertuie.

73. Niemand mag 'n voertuig vir die vervoer van vlambare vloeistof op 'n openbare plek gebruik, laat gebruik of toelaat dat dit daar gebruik word nie, tensy sodanige voertuig in goeie en behoorlik werkende toestand in stand gehou word.

Tenkopeninge.

74. Alle openinge in die tenk van 'n voertuig wat vir die vervoer van vlambare vloeistof gebruik word, moet te alle tye wanneer dit nie gebruik word nie deeglik en doeltreffend toegehou word.

'n Verantwoordelike Persoon moet Toesig oor die Padtenkvoertuig Hou.

75.(1) Elke padtenkvoertuig moet, terwyl dit as sodanig op enige ander plek as by 'n grootmaatdepot gebruik word, gedurig onder toesig van 'n verantwoordelike persoon wees.

(2) Geen padtenkvoertuig wat nie selfaangedrewe is of enige ander voertuig wat nie selfaangedrewe is nie en wat met vlambare vloeistof gevul is, mag na enige perseel geneem word of op enige perseel gelaat word nie, tensy daar terselfdertyd op dieselfde perseel 'n voertuig is wat in staat is en behoorlik toegerus is om sodanige voertuig onmiddellik van die perseel af weg te sleep.

(3) Geen padtenkvoertuig of voertuig wat nie selfaangedrewe is nie, mag in of op enige straat of ander publieke plek gelaat word, behalwe vir die minimum tydperk wat nodig is om dit af te laai en tensy dit behoorlik, stewig en direk verbind is met 'n voertuig wat in staat en behoorlik toegerus is om dit onmiddellik weg te sleep.

Posisie van 'n Padtenkvoertuig Gedurende Aflewerings-bedrywighede.

76.(1) Niemand mag—

(a) 'n padtenkvoertuig op of oor 'n openbare sypaadjie laat staan of toelaat dat dit daar staan terwyl aflewering plaasvind nie;

(b) 'n pompslang gedurende sodanige bedrywighede oor so 'n paadjie plaas, laat plaas of toelaat dat dit daar geplaas word; of

(c) veroorsaak of toelaat dat enige padtenkvoertuig op of van enige perseel agteruit beweeg voor of na aflewering op sodanige perseel.

(2) Indien nie aan die bepalings van subartikel (1) voldoen kan word nie, kan die Raad die installasie van 'n ondergrondse sypaadjievulpunt toelaat wat tot voldoening van die Raad geïnstalleer en in stand gehou moet word.

Brandblustoestelle.

77.(1) Niemand mag enige voertuig gebruik, laat gebruik of toelaat dat dit gebruik word vir die vervoer van vlambare vloeistof nie, tensy sodanige voertuig van minstens twee droë chemiese tipe brandblustoestelle met 'n inhoudsvermoë van minstens 9 kg elk voorsien is:

Provided that where the Chief Fire Officer is of the opinion, having regard to the fire hazards of the particular case, that dry-chemical fire extinguishers are not adequate, such other fire extinguishers shall be installed as he may consider to be required by the said hazards.

(2) Such extinguishers shall be carried on the road tank wagon in such a position and shall be attached to the road tank wagon in such a manner as to be readily and easily accessible in the case of fire.

Agents Likely to Ignite Flammable Liquids.

78. No person shall—

(a) bring or cause or permit to be brought any fire, flame or other agent likely to ignite flammable liquid or its vapour within 6 m of any vehicle on or in which flammable liquid is transported;

(b) carry or permit to be carried any matches, cigarette lighters or similar contrivances on any vehicle used for the transport of flammable liquid;

(c) while in attendance on such vehicle, smoke or permit any other person thereon to smoke during the transport of flammable liquid or the filling of such vehicle with flammable liquid or the discharge of such liquid therefrom; or

(d) smoke within 3 m of such vehicle during the filling of such vehicle with flammable liquid or the discharge of such liquid therefrom or while in attendance thereon, permit any other person so to smoke.

Precautions.

79. Every person responsible for or concerned in the conveyance of flammable liquid, shall take all reasonable precautions for the prevention of accident by fire or explosion and for the prevention of access by any unauthorized person to any container whilst in transit.

Restriction of Scope of Certain Sections.

80.(1) The provisions of sections 70 to 77 inclusive shall not apply to the conveyance of flammable liquid on a vehicle, not bring a road tank wagon—

(a) of a quantity not exceeding 200 litres of Class A flammable liquid or 400 litres of Class B flammable liquid, in securely closed metal containers of a capacity not exceeding 50 litres each; or

(b) of a quantity not exceeding 600 litres of Class A flammable liquid or 1 kl of Class B flammable liquid contained in securely closed metal containers of a capacity not less than 200 litres each.

(2) Such containers shall be substantially constructed and packed in such a manner as to prevent leakage and obviate their becoming broken, defective or insecure in the course of conveyance.

(3) No flammable liquid shall be conveyed in or on any steam-driven vehicle or in or on any trailer or other vehicle drawn by a vehicle so driven.

Met dien verstande dat waar die Brandweerhoof, met inagneming van die brandgevare in 'n bepaalde geval, van mening is dat die droë chemiese tipe brandblustoestelle nie toereikend is nie, daar ander brandblustoestelle wat syns insiens deur genoemde brandgevare noodsaaklik gemaak word, aangebring moet word.

(2) Sodanige brandblustoestelle moet op so 'n plek op die padtenkvoertuig vervoer word en op so 'n wyse daaraan vas wees dat dit, in die geval van brand, gou en maklik bereik kan word.

Middele wat Vlambare Vloeistof Moontlik aan die Brand kan Laat Slaan.

78. Niemand mag—

(a) enige vuur, vlam of ander middel wat moontlik vlambare vloeistof of die dampe daarvan aan die brand kan laat slaan, binne 6 m van 'n voertuig waarop of waarin vlambare vloeistof vervoer word, bring, laat bring, of toelaat dat dit daar gebring word nie;

(b) vuurhoutjies, sigaretopstekers of soortgelyke toestelle op 'n voertuig wat vir die vervoer van vlambare vloeistof gebruik word, saamdra of toelaat dat dit saamgedra word nie;

(c) terwyl hy sodanige voertuig onder sy sorg het, rook of toelaat dat iemand anders daarop rook terwyl vlambare vloeistof vervoer word of terwyl die voertuig met vlambare vloeistof volgemaak word of sodanige vloeistof daaruit getap word; of

(d) binne 3 m van sodanige voertuig af rook terwyl sodanige voertuig met vlambare vloeistof volgemaak word of terwyl vlambare vloeistof daaruit getap word, of terwyl hy dit onder sy sorg het, iemand anders toelaat om aldus te rook nie.

Voorsorgmaatreëls.

79. Elkeen wat vir die vervoer van vlambare vloeistof verantwoordelik is of daarby betrokke is, moet alle redelike voorsorgmaatreëls tref ten einde ongelukke deur brand of ontploffing te voorkom, en te verhoed dat 'n ongemagtigde persoon toegang tot enige houer verkry terwyl dit onderweg is.

Beperking van die Toepassing van Sekere Artikels.

80.(1) Die bepalings van artikels 70 tot en met 77 is nie van toepassing op die vervoer van vlambare vloeistof op 'n ander voertuig as 'n padtenkvoertuig nie, indien daar—

(a) 'n hoeveelheid van hoogstens 200 liter vlambare vloeistof Klas A, of 400 liter vlambare vloeistof Klas B in metaalhouers wat deeglik toe is, elk met 'n inhoudsvermoë van hoogstens 50 liter, vervoer word; of

(b) 'n hoeveelheid van hoogstens 600 liter vlambare vloeistof Klas A of 1 kl vlambare vloeistof, Klas B, in metaalhouers wat deeglik toe is, met 'n inhoudsvermoë van minstens 200 liter elk, vervoer word.

(2) Sodanige houers moet sterk gemaak wees en op so 'n wyse gepak word dat hulle nie sal lek, stukkend, defek of los raak terwyl hulle vervoer word nie.

(3) Geen vlambare vloeistof mag in of op 'n stoomaangedrewe voertuig of in of op 'n sleepwa of ander voertuig, wat deur 'n aldus aangedrewe voertuig, getrek word, vervoer word nie.

DRY-CLEANING ROOMS: GENERAL.

Certificate for Dry-cleaning Room.

81.(1) No person shall use or cause or permit to be used any room as a dry-cleaning room unless and until such room has been duly registered as such in terms of these by-laws.

(2) No certificate shall be issued in respect of any premises for use as a dry-cleaning room, unless and until such premises comply with the requirements of these by-laws.

(3) The provisions of sections 5 to 12 inclusive and 15 shall apply *mutatis mutandis* to a certificate in terms of this section.

Use of Dry-cleaning Rooms.

82. No dry-cleaning room shall be used for any purpose other than that of dry-cleaning and purposes reasonably incidental thereto.

Installation of Machinery.

83.(1) No person shall install or cause or permit to be installed any dry-cleaning machinery such as washing machines, clarifiers, stills or settling tanks elsewhere than in the dry-cleaning room.

(2) All machinery shall be efficiently electrically earthed.

(3) All such electrical earth connections shall be examined and entered in a log-book as required in terms of section 46(3).

Boilers.

84. No boiler shall be installed in such proximity or in such a position or manner in relation to a dry-cleaning room that it is likely, in the opinion of the Chief Fire Officer, to ignite any flammable liquid in, or vapour escaping from, the room.

85. Notwithstanding the provision of section 83(1), the installation of cleaning machines of the tumbler type shall be permitted elsewhere than in a dry-cleaning room: Provided that the machine so installed is equipped with an effective system of ventilation by the exhaust method.

Electrical Equipment.

86.(1) Subject to the provisions of subsection (2), no person shall install or cause or permit to be installed in any dry-cleaning room where flammable liquids of Class A or Class B are used, any electrical machinery or other electrical apparatus other than—

(a) an electric light enclosed in an outer flame-proof fitting;

(b) electric wires, protected throughout by seamless metal tubes, the junctions of which are screwed together or cable approved by the Council by reference to current electrical practice;

DROOGSKOONMAAKLOKALE: ALGEMEEN.

Sertifikaat ten Opsigte van 'n Droogskoonmaaklokaal.

81.(1) Niemand mag 'n vertrek as 'n droogskoonmaaklokaal gebruik, laat gebruik, of toelaat dat dit as sodanig gebruik word nie, tensy en alvorens dié vertrek behoorlik kragtens hierdie verordeninge as sodanig geregistreer is.

(2) Geen sertifikaat vir die gebruik van 'n perseel as 'n droogskoonmaaklokaal word uitgereik nie, tensy en alvorens sodanige perseel aan die vereistes van hierdie verordeninge voldoen.

(3) Die bepalings van artikels 5 tot en met 12 en 15 is *mutatis mutandis* van toepassing op 'n sertifikaat wat kragtens hierdie artikel uitgereik word.

Gebruik van Droogskoonmaaklokale.

82. Geen droogskoonmaaklokaal mag vir enige ander doel as vir droogskoonmaakwerk en vir doeleindes wat redelikerwys daarmee in verband staan, gebruik word nie.

Installasie van Masjinerie.

83.(1) Niemand mag enige droogskoonmaakmasjinerie soos byvoorbeeld wasmasjiene, suiweringstoestelle, distilleerketels of neerslagtenks elders as in 'n droogskoonmaaklokaal installeer, laat installeer of toelaat dat dit daar geïnstalleer word nie.

(2) Alle masjinerie moet elektries doeltreffend met die aarde verbind wees.

(3) Alle sodanige elektriese aardleidings moet ondersoek word en in 'n logboek, soos in artikel 46(3) vereis, aangeteken word.

Stoomketels.

84. Geen stoomketel mag so na aan, of in 'n posisie of op 'n wyse in verhouding tot, 'n droogskoonmaaklokaal aangebring word dat dit, volgens die mening van die Brandweerhoof, waarskynlik vlambare vloeistof in, of die dampe wat ontsnap uit, die lokaal aan die brand kan laat slaan nie.

85. *Ondanks die bepalings van artikel 83(1), kan* wasmasjiene van die tuimeltipe elders as in 'n droogskoonmaaklokaal geïnstalleer word: Met dien verstande dat die masjien aldus geïnstalleer, toegerus moet wees met 'n doeltreffende ventilasiestelsel van die uitlaat-tipe.

Elektriese Toerusting.

86.(1) Behoudens die bepalings van subartikel (2), mag niemand elektriese masjinerie of ander elektriese apparaat in 'n droogskoonmaaklokaal waar vlambare vloeistowwe Klas A of Klas B gebruik word, installeer, laat installeer of toelaat dat dit daar geïnstalleer word nie, uitgesonderd—

(a) 'n elektriese gloeilamp wat 'n vlamdigte omhulsel buite-om het;

(b) elektriese draadleidings wat heeltemal deur naatlose metaalbuise waarvan die lasse vasgeskroef word, beskerm word of kabels wat die Raad ooreenkomstig die gangbare elektrotegniese praktyk goedgekeur het;

(c) one electric push-button switch of construction known as flameproof which shall be situated not less than 1 m above the level of the floor and constructed and connected for stopping machinery in case of emergency.

(2) Any electric motor installed in a dry-cleaning room where flammable liquids of Class A are used shall be of flame-proof construction, and any such motor installed in any such room where flammable liquids of Class B are used shall be of flame-proof or totally enclosed construction.

Handling of Flammable Liquid.

87. The storage tank shall be connected to the dry-cleaning machinery and no flammable liquid shall be handled during any cleaning process: Provided that a total quantity not exceeding 20 litres at any one time may be handled in one or more containers for the purpose of handwashing or spotting.

Danger Notice at Entrance.

88. The words "DANGER — NO SMOKING" in both official languages shall be prominently displayed in letters not less than 150 mm high outside every entrance to every dry-cleaning room and shall at all times be maintained in such position and in a legible condition.

Removal of Foreign Matter and Metallic Substances from Garments.

89. No person shall dry-clean or cause or permit to be dry-cleaned any article of clothing or other textile unless and until such article has been thoroughly examined and all objects such as matches, metallic substances, metal buttons or other objects which are liable to cause sparks have been removed therefrom.

Instructions to Employees.

90. The occupier shall cause all persons employed in the dry-cleaning room to be thoroughly instructed as to the hazards involved in the use of flammable liquids and in the handling and method of usage of all fire appliances required in terms of these by-laws to be on the premises, and shall repeat such instructions quarterly.

Unauthorized Persons or Acts.

91.(1) No person, other than a person lawfully employed on the premises, shall enter any dry-cleaning room without the express permission of the occupier or person in charge.

(2) No person shall commit any act which is liable to cause fire, explosion or other damage to a dry-cleaning room or its contents.

Position of Machinery.

92. All dry-cleaning machinery such as washing machines, clarifiers, stills and settling tanks shall be situated as near as reasonably possible to the exhaust ducts as required in terms of section 98.

(c) een elektriese drukknopskakelaar van die konstruksie wat as vlamdig bekendstaan, wat minstens 1 m bokant die vloervlak aangebring is, en wat op so 'n wyse gemaak en verbind moet wees dat dit in noodgevalle gebruik kan word om die masjinerie mee af te skakel.

(2) Enige elektriese motor wat in 'n droogskoonmaaklokaal waarin daar vlambare vloeistowwe Klas A gebruik word, geïnstalleer is, moet vlamdig gemaak wees en enige sodanige motor wat in sodanige lokaal waar vlambare vloeistowwe Klas B gebruik word, geïnstalleer is, moet vlamdig gemaak of geheel en al deur 'n omhulsel bedek wees.

Die Hantering van Vlambare Vloeistof.

87. Die opbergtenk moet met die droogskoonmaakmasjinerie verbind wees, en geen vlambare vloeistof mag tydens die droogskoonmaakbedrywighede gehanteer word nie: Met dien verstande dat hoogstens 20 liter te enige tyd in een of meer houers gehanteer kan word met die doel om hand-waswerk te verrig of om kolle te verwyder.

Gevaarkennisgewing by die Ingang.

88. Die woorde "GEVAAR — MOENIE ROOK NIE" moet opvallend in albei amptelike tale en in letters minstens 150 mm hoog, aan die buitekant van elke toegang tot elke droogskoonmaaklokaal aangebring word, en moet te alle tye op die plek in 'n leesbare toestand in stand gehou word.

Verwydering van Vreemde Voorwerpe en Metaalbestanddele uit Kledingstukke.

89. Niemand mag 'n kledingstuk of ander weefstof droogskoonmaak, laat droogskoonmaak of toelaat dat dit droogskoongemaak word nie, tensy en alvorens so 'n artikel deeglik ondersoek is en alle voorwerpe soos vuurhoutjies, metaalbestanddele, metaalknope of ander voorwerpe wat moontlik vonke kan veroorsaak, daaruit verwyder is.

Opdragte aan Werknemers.

90. Die okkupant moet almal wat in die droogskoonmaaklokaal in diens is, behoorlik inlig omtrent die gevare verbonde aan die gebruik van vlambare vloeistof, asook ten opsigte van die hantering en aanwendingsmetode van alle brandblustoestelle wat ingevolge hierdie verordeninge op die perseel gehou moet word, en sodanige voorligting met elke kwartaal herhaal word.

Ongemagtigde Persone of Dade.

91.(1) Niemand, uitgesonderd 'n persoon wat wettiglik op die perseel in diens is, mag 'n droogskoonmaaklokaal sonder die uitdruklike toestemming van die okkupant of die persoon in beheer, binnegaan nie.

(2) Niemand mag 'n daad verrig wat moontlik 'n brand of ontploffing kan veroorsaak of ander skade aan die droogskoonmaaklokaal of die inhoud daarvan kan berokken nie.

Plasing van Masjinerie.

92. Alle droogskoonmaakmasjinerie soos wasmasjiene, suiweringstoestelle, distilleerketels en neerslagtenks moet so nā as redelikerwys moontlik aan die uitlaatopeninge soos by artikel 98 vereis, geplaas wees.

Shafting.

93. Where any machinery is driven by means of shafts from motive power outside the dry-cleaning room, the driving shaft shall pass through a gas-proof wall box which shall be installed at the point where such shafting enters such dry-cleaning room.

Scouring or Brushing Table.

94. Every table used for washing or brushing any material with flammable liquid shall comply with the following requirements:

(a) Such table shall be provided with a liquid-tight top with a curb on all sides not less than 25 mm high.

(b) The top of such table shall be so pitched as to ensure thorough draining by a pipe not less than 25 mm in diameter directly connected to an underground tank through a trap which shall prevent the return of vapour.

(c) Metal tops shall be effectively electrically earthed.

(d) Such table shall be so secured to the floor or wall as not to disturb the electrical earth and drain connections.

Portable Lamps.

95. No person shall take or cause or permit to be taken any flash lamp or any other light or lamp into any dry-cleaning room, except an electrical light or safety lamp which has been fitted with an outer flame-proof fitting.

SPECIAL PROVISIONS WHERE CLASS A FLAMMABLE LIQUIDS ARE USED FOR DRY-CLEANING.

Construction of Dry-cleaning Rooms.

96. Every dry-cleaning room shall be constructed in accordance with the following requirements:

(a) The walls shall be constructed of brick or concrete or similar suitable material, the floor of concrete or other impervious material and the roof of fire-resisting material.

(b) All window frames shall be constructed of metal, glazed with wire woven glass and shall be of the opening type. Each single pane shall not exceed 450 mm x 450 mm.

(c) All door frames shall be of metal and any internal door shall be made of hardwood of a thickness of not less than 50 mm and completely covered with metal of not less than 0,9 mm thick. Doors to the open air shall be constructed as above or shall be close fitting metal doors of not less than 3 mm thick, carried on an angle iron frame and having an all round overlap of 50 mm. The type of door fitted shall be at the discretion of the Chief Fire Officer.

(d) A sill of concrete at least 150 mm high shall be erected across all door openings at surface level or

Asleidings.

93. Waar masjinerie aangedryf word deur middel van asse wat aangedryf word deur dryfkrag buite die droogskoonmaaklokaal, moet die dryfas deur 'n gasdigte muurkas gaan wat aangebring moet word op die plek waar sodanige as die droogskoonmaaklokaal binnekom.

Was- of Borseltafels.

94. Elke tafel wat gebruik word om materiaal met vlambare vloeistof te was of te borsel, moet aan die volgende vereistes voldoen:

(a) Sodanige tafel moet voorsien wees van 'n vloeistofdigte blad wat rondom 'n rand van minstens 25 mm hoog, aan het.

(b) Die blad van sodanige tafel moet skuins wees, sodat alle vloeistof behoorlik kan wegloop deur middel van 'n pyp met 'n deursnee van minstens 25 mm wat regstreeks met 'n ondergrondse tenk verbind is en wat 'n afsluiter aan het wat voorkom dat dampe terugkeer.

(c) Metaalblaaie moet elektries behoorlik met die aarde verbind wees.

(d) Sodanige tafel moet op so 'n wyse aan die vloer of muur vasgesit word dat die elektriese aardleiding en afvoerpyp nie versteur kan word nie.

Draagbare Lampe.

95. Niemand mag 'n flitslamp of ander lig of lamp, uitgesonderd 'n elektriese gloeilamp of 'n veiligheidslamp, met 'n vlamdigte omhulsel buite-om, in 'n droogskoonmaaklokaal inneem, laat inneem of toelaat dat dit daar ingeneem word nie.

SPESIALE BEPALINGS IN GEVALLE WAAR VLAMBARE VLOEISTOF KLAS A VIR DROOGSKOONMAAKDOELEINDES GEBRUIK WORD.

Die Bou van Droogskoonmaaklokale.

96. Elke droogskoonmaaklokaal moet ooreenkomstig die volgende vereistes gebou word:

(a) Die mure moet van baksteen of beton of van soortgelyke geskikte materiaal, die vloer van beton of ander syferdigte materiaal en die dak van brandbestande materiaal gebou word.

(b) Alle vensterrame moet van metaal wees en moet ruite van splintervrye draadglas inhê, en moet van die tipe wees wat oopgemaak kan word. Elke afsonderlike ruit mag nie groter as 450 mm x 450 mm wees nie.

(c) Alle deurskosyne moet van metaal wees en enige binnedeur van hardehout met 'n dikte van minstens 50 mm en moet geheel en al met metaal van minstens 0,9 mm dik bedek wees. Buitedeur moet, soos hierbo genoem, vervaardig wees, of moet styfpassende metaaldeure van minstens 3 mm dik wees en moet aan hoekysterkosyne gemonteer word en rondom 'n oorslag van 50 mm hê. Die tipe deur wat ingesit word, is volgens die diskresie van die Brandweerhoof.

(d) 'n Drumpel van beton, minstens 150 mm hoog, moet op die grondhoogte dwarsoor alle deuropeninge aangebring word, of die vloer van die vertrek

the floor of the room shall be 150 mm below the adjacent surface level.

(e) The dry-cleaning room shall be situated not closer than 1,5 m to any public thoroughfare or building unless the wall or walls which are exposed to such thoroughfare or building are constructed without openings: Provided that not more than two sides of any dry-cleaning room shall be without openings.

(f) There shall be provided at least two doors opening outwards, one directly into the open air. Such doors shall be so situated and at such a distance from each other as to allow the free and unimpeded escape of persons within the dry-cleaning room through either door in the case of fire or other danger.

(g) No dry-cleaning room shall have any opening into any other room or building: Provided that subject to compliance with the conditions hereunder set out any room used or intended to be used solely for the purpose of drying materials which have been cleaned or treated with flammable liquid may be constructed under the same roof as the dry-cleaning room:

(i) Such drying room shall be separated from the dry-cleaning room by a wall constructed of non-combustible material; and

(ii) the entrance to such drying-room shall be provided with a metal door and frame.

(h) No dry-cleaning room shall be situated below or above any other room or building.

(i) Every dry-cleaning room shall be maintained at all times in accordance with the provisions of this section.

Steam Pipes.

97.(1) Every dry-cleaning room shall be fitted with at least one steam pipe not less than 25 mm in diameter. Every such pipe shall be provided with—

(a) perforations or jets at least 6 mm in diameter and so spaced as to give as near as practicable an equal distribution of steam in such a manner that such room can be immediately flooded with steam in the case of fire; and

(b) a steam trap or other effective means of preventing the accumulation of water within such pipe.

(2) An adequate steam supply for such pipe or pipes shall be maintained continuously while any flammable liquid is contained in any washing machines, clarifiers, stills or similar appliances.

(3) Such steam supply system shall be provided with a valve placed in the service line and situated outside the building in an easily accessible position.

Ventilation of Dry-cleaning Room.

98.(1) Every dry-cleaning room shall be ventilated with a mechanical system of exhaust and inlet ventilation of such design, construction and capacity as will adequately remove flammable liquid vapour from such room and discharge such vapour into the open air at a

moet 150 mm laer as die aangrensende grondhoogte wees.

(e) Die droogskoonmaaklokaal moet nie nader as 1,5 m van 'n openbare deurgang of gebou af wees nie, tensy die muur of mure wat aan sodanige weg of gebou front, geen openinge het nie: Met dien verstande dat hoogstens twee kante van 'n droogskoonmaaklokaal sonder openinge mag wees.

(f) Minstens twee deure wat na buite oopmaak, moet verskaf word, en een daarvan moet regstreeks in die buitelug oopgaan. Sodanige deure moet so geleë wees en so ver van mekaar af wees, dat persone binne die droogskoonmaaklokaal ingeval van brand of ander gevaar, vry en ongehinderd deur enigeen van die deure kan ontsnap.

(g) Geen droogskoonmaaklokaal mag 'n opening na 'n ander vertrek of gebou toe hê nie: Met dien verstande dat, mits daar aan die voorwaardes hieronder uiteengesit, voldoen word, enige vertrek wat uitsluitend gebruik word of bedoel is om gebruik te word om materiaal wat skoongemaak is of met vlambare vloeistof behandel is, droog te maak, onder dieselfde dak as die droogskoonmaaklokaal gebou kan word:

(i) Sodanige droogkamer met deur middel van 'n muur wat van nie-brandbare materiaal gebou is, van die droogskoonmaaklokaal geskei wees; en

(ii) die ingang na sodanige droogkamer moet 'n metaaldeur en kosyn hê.

(h) Geen droogskoonmaaklokaal mag onder of bokant 'n ander vertrek of gebou geleë wees nie.

(i) Elke droogskoonmaaklokaal moet te alle tye ooreenkomstig die bepalings van hierdie artikel in stand gehou word.

Stoompype.

97.(1) Elke droogskoonmaaklokaal moet minstens een stoompyp met 'n deursnee van minstens 25 mm hê. Elke sodanige pyp moet voorsien wees van—

(a) gaatjies of sproeiers met 'n deursnee van minstens 6 mm, wat so versprei is dat daar, sover doenlik, 'n eweredige verspreiding van stoom op so 'n wyse kan plaasvind dat die lokaal ingeval van brand onmiddellik met stoom gevul kan word; en

(b) 'n stoomafsluiter of 'n ander doeltreffende middel om te voorkom dat water in so 'n pyp vergaar.

(2) 'n Voldoende voorraad stoom vir so 'n pyp of pype moet voortdurend, onderwyl daar vlambare vloeistof in wasmasjiene, suiweringstoestelle, distilleerketels of soortgelyke toestelle is, beskikbaar gehou word.

(3) Sodanige stoomtoevoerstelsel moet voorsien wees van 'n klep wat buite die gebou in die toevoerpyp aangebring is op 'n plek wat maklik toeganklik is.

Ventilasie van Droogskoonmaaklokaal.

98.(1) Elke droogskoonmaaklokaal moet geventileer word deur middel van 'n meganiese stelsel van uit- en inlaatventilasie van sodanige ontwerp, konstruksie en kapasiteit dat dit die dampe van die vlambare vloeistof doeltreffend uit sodanige lokaal verwyder en die dampe in die buitelug uitlaat op 'n plek bokant die dak van

point above the roof of such room and not within 4,5 m of any opening to any building. The motor or motors of such mechanical exhaust and inlet ventilation system shall comply with the provisions of section 86(2).

(2) Such system of ventilation shall be capable of providing an air velocity of a minimum of 0,5 m per second through any cross-section of the room so as adequately to remove flammable vapour from the room and change the air therein.

(3) The blades of all ventilating fans shall be made of non-ferrous metal.

(4) All exhaust ventilation ducts shall be installed—

(a) as near ground level as practicable: Provided that where any such duct or any portion thereof is situated at a level which is less than 150 mm above the level of the dry-cleaning room floor, adequate provision shall be made to prevent the escape of flammable liquid therefrom in the case of fire or otherwise;

(b) as near as practicable to the points of origin of flammable liquid or the dry-cleaning machinery such as washing machines, clarifiers, stills, settling tanks and similar appliances.

(5) Any person discovering a fire in any dry-cleaning room shall immediately take all possible steps to shut down the exhaust ventilation system.

SPECIAL PROVISIONS WHERE CLASS B FLAMMABLE LIQUID IS USED FOR DRY-CLEANING.

Construction of Dry-cleaning Room.

99. Every dry-cleaning room shall be constructed and maintained in accordance with the following requirements:

(a) The walls of the room shall be constructed of brick, concrete or other material which, in the opinion of the Chief Fire Officer, is suitable; the floor shall be of concrete or other impervious material, and the roof may be constructed of other material where no other rooms, buildings or premises are, in the opinion of the Chief Fire Officer, likely to be endangered by an outbreak of fire in the dry-cleaning room.

(b) A sill of concrete at least 150 mm high shall be erected across all door openings at surface level or the floor of the room shall be 150 mm below the adjacent surface level.

(c) (i) The room shall be provided with at least two doors to be made either of hardwood not less than 50 mm thick, and completely covered with metal not less than 0,56 mm in thickness or with close-fitting metal doors not less than 3 mm thick, carried on an angle iron frame and having an all round overlap of 50 mm. The type of door fitted shall be at the discretion of the Chief Fire Officer.

(ii) The said doors shall open outwards and be so situated in general and in relation to each other and in particular at such a distance from each other as to allow the free and unimpeded escape of persons within the room through both

sodanige lokaal wat minstens 4,5 m van enige opening van enige gebou geleë is. Die motor of motore van sodanige meganiese uit- en inlaatventilasiestelsel moet aan die bepalings van artikel 86(2) voldoen.

(2) Sodanige ventilasiestelsel moet in staat wees om 'n stroomsnelheid van minstens 0,5 m per sekonde deur enige deursnee van die lokaal te verskaf ten einde die dampe van die vlambare vloeistof doeltreffend uit die lokaal te verwyder en die lug daarin te wissel.

(3) Die lemme van alle ventilasiewaaiers moet van nie-ysterhoudende metaal vervaardig wees.

(4) Alle ventilasie-uitlaatpype moet—

(a) so na aan die grondhoogte as doenlik aangebring word: Met dien verstande dat indien sodanige pyp of enige gedeelte daarvan minder as 150 mm bokant die vlak van die droogskoonmaaklokaal se vloer geleë is, daar doeltreffende voorsorg getref moet word om te voorkom dat vlambare vloeistof, ingeval van brand of andersins, daardeur ontsnap;

(b) so na as doenlik aan die plekke van oorsprong van vlambare vloeistof of die droogskoonmaaksmasjinerie, soos wasmasjiene, suiweringstoestelle, distilleerketels, neerslagtenks en soortgelyke toestelle, aangebring word.

(5) Iemand wat 'n brand in 'n droogskoonmaaklokaal ontdek, moet onmiddellik alle moontlike stappe doen om die ventilasie-uitlaatstelsel af te sluit.

SPESIALE BEPALINGS IN GEVALLE WAAR VLAMBARE VLOEISTOF KLAS B VIR DROOGSKOONMAAKDOELEINDES GEBRUIK WORD.

Bou van Droogskoonmaaklokaal.

99. Elke droogskoonmaaklokaal moet ooreenkomstig die volgende vereistes gebou en in stand gehou word:

(a) Die mure moet van baksteen, of beton of van ander geskikte materiaal, na goeddunke van die Brandweerhoof, gebou word; die vloer moet van beton of ander syferdigte materiaal en die dak van gewapende beton vervaardig wees: Met dien verstande dat die dak van ander materiaal vervaardig kan word na goeddunke van die Brandweerhoof ingeval daar geen ander vertrekke, geboue of persele is wat deur 'n brand in die droogskoonmaaklokaal in gevaar gestel kan word nie.

(b) 'n Drumpel van beton, minstens 150 mm hoog, moet op die grondhoogte dwarsoor al die deuropeninge aangebring word, of die vloer van die vertrek moet 150 mm laer as die aangrensende grondhoogte wees.

(c) (i) Die lokaal moet minstens twee deure hê wat van hardehout minstens 50 mm dik en geheel en al bedek met metaal minstens 0,56 mm dik, vervaardig is, of nousluitende deure van metaal minstens 3 mm dik, wat aan 'n hoekysterraam bevestig is en wat 'n oorslag van minstens 50 mm rondom het. Die tipe deur wat aangebring moet word, moet na goeddunke van die Brandweerhoof wees.

(ii) Die genoemde deure moet na buite oopgaan en moet in die algemeen en in verhouding tot mekaar so geplaas wees en in die besonder sover van mekaar wees dat mense binne-in die lokaal ingeval van brand of ander gevaar vry

of them simultaneously in case of fire or other danger.

(d) All window frames shall be constructed of metal, glazed with wire woven glass and shall be of the opening type. Each single pane shall not exceed 450 mm x 450 mm.

(e) No dry-cleaning room shall be situated below or above any other room or building which is not provided to the satisfaction of the Chief Fire Officer with adequate means of escape for its occupants to safety in the event of fire.

(f) No dry-cleaning room shall be situated in the basement of a building or at such a depth that the floor level is more than 60 mm below the main level of the ground immediately surrounding it.

Ventilation of Dry-cleaning Room.

100. Every dry-cleaning room shall be ventilated with a mechanical system of exhaust and inlet ventilation conforming to and complying with the provisions of sections 56 and 86(2).

SPRAY ROOMS.

Registration of Spray Room.

101.(1) No person shall spray or cause or permit to be sprayed any vehicle or article with any flammable liquid in any room or building, unless such person is in possession of a spray permit in respect of such room or building.

(2) Such permit shall only be valid for the period terminating on the next succeeding 31st day of December.

(3) The provisions of sections 5 to 12 inclusive and 15 shall apply *mutatis mutandis* to a permit in terms of this section.

Issue of Spray Room Permit.

102. No spray room permit shall be granted in respect of any spray room unless and until such room complies with the requirements of these by-laws.

Construction of Spray Room.

103.(1) Subject to the provisions of subsection (4), every spray room shall be constructed in accordance with the following requirements:

(a) The walls shall be constructed of brick or concrete of not less than a minimum thickness 100 mm thick or of any other material which, in the opinion of the Chief Fire Officer, is suitable for the purpose. The floor shall be constructed of concrete or other impervious material to the satisfaction of the Chief Fire Officer and the roof shall be constructed of reinforced concrete.

(b) The room shall be fitted with hard-wood doors not less than 50 mm thick and completely covered with metal not less than 0,56 mm thick or with close-fitting metal doors of not less than 3 mm thick, carried on an angle-iron frame and having an all-round overlap of not less than 50 mm. Such doors shall open outwards and shall be kept locked after normal working hours. The type of door required to be fitted shall be at the discretion of the Chief Fire Officer.

en ongehinderd by albei deure gelyktydig kan uitkom.

(d) Alle vensterrame moet van metaal gemaak wees, moet ruite van splintervrye draadglas inhê, en moet van die tipe wees wat oopgemaak kan word. Elke afsonderlike ruit mag nie groter as 450 mm x 450 mm wees nie.

(e) Geen droogskoonmaaklokaal mag onder of bokant 'n ander vertrek of gebou wat nie tot voldoening van die Brandweerhoof voorsien is met voldoende fasiliteite vir die veilige ontsnapping van die mense daarin ingeval van brand, geleë wees nie.

(f) Geen droogskoonmaaklokaal mag in die kelderverdieping van 'n gebou geleë wees nie, of so diep dat die oppervlak van die vloer meer as 600 mm onder die algemene vlak van die grond in die onmiddellike omgewing daarvan is nie.

Ventilasie van Droogskoonmaaklokaal.

100. Elke droogskoonmaaklokaal moet geventileer word deur middel van 'n meganiese stelsel van uit- en inlaatventilasie in ooreenstemming met, en wat voldoen aan, die bepalings van artikels 56 en 86(2).

SPUITLOKALE.

Registrasie van Spuitlokale.

101.(1) Niemand mag enige voertuig of artikel met vlambare vloeistof in 'n vertrek of gebou spuit, laat bespuit, of toelaat dat dit bespuit word nie, tensy sodanige persoon in besit van 'n spuitpermit vir sodanige lokaal of gebou is.

(2) Sodanige permit is slegs tot op die eersvolgende 31ste dag van Desember geldig.

(3) Die bepalings van artikels 5 tot en met 12 en 15 is *mutatis mutandis* van toepassing op 'n permit ingevolge hierdie artikel.

Uitreiking van Spuitlokaalpermit.

102. Geen spuitlokaalpermit word ten opsigte van 'n spuitlokaal uitgereik nie, tensy en alvorens sodanige lokaal aan die vereistes van hierdie verordeninge voldoen.

Bou van Spuitlokaal.

103.(1) Behoudens die bepalings van subartikel (4), moet elke spuitlokaal ooreenkomstig die volgende vereistes gebou word:

(a) Die mure moet van baksteen of beton minstens 100 mm dik, of van enige ander materiaal wat na die mening van die Brandweerhoof, vir die doel geskik is, gebou word. Die vloer moet van beton of 'n ander syferdigte materiaal tot voldoening van die Brandweerhoof en die dak van gewapende beton gebou wees.

(b) Die lokaal moet hardehoutdeure hê, minstens 50 mm dik, en geheel en al bedek met metaal minstens 0,56 mm dik, of nousluitende metaaldeure, minstens 3 mm dik wat aan 'n hoekysterraam bevestig is en wat rondom 'n oorslag van minstens 50 mm het. Sodanige deure moet na buite toe oopmaak en moet na gewone werkure gesluit gehou word. Die tipe deur wat aangebring moet word, moet na goeddunke van die Brandweerhoof wees.

(c) All window frames shall be constructed of metal, glazed with wire woven glass and shall be of the non-opening type. Each single pane shall not exceed 450 mm x 450 mm.

(d) Every spray room shall be ventilated with a mechanical system of exhaust and inlet ventilation capable of providing an air velocity of a minimum of 0,5 m per second through any cross-section of the room so as adequately to remove flammable vapour from the room and change the air therein. The centre line of the inlets to such system shall be at least 450 mm above the level of the floor. The said system shall operate at all times during working hours, including any intervals for lunch or tea, and shall operate for not less than five minutes after each working period.

(e) Every spray room with a floor area in excess of 20 m² shall be provided with at least two doors, constructed as prescribed in paragraph (b), situated at such distance from each other as to allow the free and unimpeded escape of persons within the spray room from either door in the case of fire or other hazard.

(f) Where a spray room is subdivided into spray booths as prescribed in paragraph (g), each such booth shall be ventilated in accordance with the provisions of paragraph (d).

(g) Where part or the whole of any spray room is subdivided by partitions into separate compartments or booths (hereinafter described as spray booths) such spray booths shall be constructed of metal or other non-combustible material.

(h) All exhaust vents shall be constructed of non-combustible material and so designed and constructed that all vapours are expelled from the interior of a building into the open air at a point not less than 1 m above the apex of the roof of the building: Provided that the Chief Fire Officer may permit such vapours to be expelled into the open air at a lesser distance than 1 m above the apex of the roof if, in his opinion, the vapour is not likely to be ignited. In the event of the exhaust vents being external to the spray room and in communication with any other internal portion of the building, such vents shall be protected by either 100 mm brickwork or 50 mm asbestos cement lagging. There shall be no right angle bends in the vents.

(i) The ventilation inlets shall be of 215 x 140 mm terra-cotta air bricks and honeycombed into the wall opposite the exhaust ventilation system at 215 mm centres, from floor level to a height of not less than 2,5 m. Such inlets shall be substantially equivalent to the exhaust capacity provided in terms of these by-laws.

(j) The blades of any fan used in the spray room shall be of non-ferrous metal.

(2) No electrical equipment shall be installed in the spray room other than —

(a) electric lights enclosed in outer flame-proof fittings;

(c) Alle vensterrame moet van metaal gemaak wees, moet ruite van splintervrye draadglas inhê en moet van die tipe wees wat nie oopgemaak kan word nie. Elke afsonderlike ruit mag nie groter as 450 mm x 450 mm wees nie.

(d) Elke spuitlokaal moet geventileer word deur middel van 'n meganiese stelsel van uit- en inlaatventilasie wat in staat is om 'n stroomsnelheid van minstens 0,5 m per sekonde deur enige deursnee van die lokaal te verander ten einde die dampe van die vlambare vloeistof doeltreffend uit die lokaal te verwyder en die lug daarin te wissel. Die middellyn van die inlaatopeninge van sodanige stelsel moet minstens 450 mm bokant die vloeroppervlakte geleë wees. Genoemde stelsel moet voortdurend tydens werktye, met inbegrip van die eet- en teepouse, en minstens vyf minute na afloop van elke werktydperk, in werking wees.

(e) Elke spuitlokaal met 'n vloerruimte van meer as 20 m² moet van minstens twee deure, gebou soos in paragraaf (b) voorgeskryf, voorsien wees en sodanige afstand van mekaar geleë wees dat alle persone in die spuitlokaal vry en ongehinderd by elke deur kan ontsnap ingeval van 'n brand of ander gevaar.

(f) Indien 'n spuitlokaal in spuithokkies, soos in paragraaf (g) omskryf, afgeskort is, moet elke sodanige hokkie ooreenkomstig die bepalings van paragraaf (d) geventileer word.

(g) Indien 'n gedeelte van of die hele spuitlokaal deur middel van afskortings in afsonderlike afdelings of hokkies (hierna spuithokkies genoem) verdeel is, moet sodanige spuithokkies van metaal of ander nie-brandbare materiaal vervaardig wees.

(h) Alle uitlaatopeninge moet van nie-brandbare materiaal gemaak word en so ontwerp en gebou wees dat alle dampe van die binnekant van 'n gebou na die buitelug gevoer word op 'n plek minstens 1 m bokant die toppunt van die dak van die gebou: Met dien verstande dat die Brandweerhoof kan toelaat dat die dampe op 'n plek nader as 1 m van die toppunt van die dak, na die buitelug gevoer kan word indien die dampe, syns insiens, waarskynlik nie aan die brand sal slaan nie. Ingeval die uitlaatopeninge buite die spuitlokaal is en verbind is met enige ander interne gedeelte van die gebou, moet sodanige openinge beskerm word deur steenwerk van 100 mm dik of 50 mm asbessementplate. Daar mag geen reghoekige buigings in die uitlaatopeninge voorkom nie.

(i) Die inlaatventilasie-openinge moet van 215 x 140 mm terra-cotta lugstene wees wat in 'n heuningkoekmuur teenoor die uitlaatventilasiestelsel op middelpunte van 215 mm vanaf die vloervlak tot 'n hoogte van minstens 2,5 m, aangebring is. Sodanige ventilasie-openinge moet wesenlik gelyk wees aan die uitlaatkapasiteit waarvoor daar ingevolge hierdie verordeninge voorsiening gemaak word.

(j) Die lemme van enige waaier wat in die spuitlokaal gebruik word, moet van nie-ysterhoudende metaal wees.

(2) Geen elektriese toerusting mag in die spuitlokaal aangebring word nie, behalwe —

(a) elektriese gloeilampe wat 'n vlamdigte omhulsel buite-om het;

(b) electric wires protected throughout by seamless metal tubes, the junctions of which are screwed together or cables of the armoured type approved by the Chief Fire Officer; and

(c) electrical apparatus of flame-proof construction used for ventilating purposes.

(3)(a) The spray rooms, fans and vents shall be kept clean and free from flammable deposits and all fans and vents shall be kept in proper working order at all times and any scraping necessary to comply with the provisions of this subsection shall be carried out with non-ferrous instruments.

(b) All drums, cans or similar vessels containing flammable liquids or substances or which have contained the same and have not been degassed or otherwise rendered harmless, shall be kept securely closed when not in use and shall, after the contents have been used, be removed from the spray room and stored in such a place that, in the opinion of the Chief Fire Officer, they are not likely to cause danger or obstructions or obstruct or impede the escape to safety of persons or animals in the event of fire.

(4) The Chief Fire Officer may at his discretion permit any reasonable deviation from the provisions of this section which he is satisfied will not create or increase the danger of fire or the danger to persons, animals or other property arising in the event of fire.

Danger Notices at Entrance.

104. The words "DANGER — NO SMOKING" in both official languages shall be prominently displayed in letters not less than 150 mm high outside the entrance to every spray room, and shall at all times be maintained in such position and in a clearly legible condition.

When Permit is Not Required.

105. Nothing contained in sections 101 to 104 inclusive shall prohibit the spraying with flammable liquid of any vehicle or article in the open air if such spraying is not within a distance of 15 m from any fire, flame, open light or other agent likely to ignite such flammable liquid or its vapour and, in the opinion of the Chief Fire Officer such spraying is not likely in the event of fire to impede the escape of persons or animals, or to endanger any room or building.

Mixing Rooms.

106. The provisions of sections 81, 88, 90, 95 and 98 shall apply *mutatis mutandis* to mixing rooms.

Provisions Where Class A Flammable Liquids Are Used or Handled.

107. The provisions of section 96(a) to (f) inclusive, (h) and (i) shall apply *mutatis mutandis* to Class A flammable liquids.

Provisions where Class B Flammable Liquids are Used or Handled.

108. The provisions of section 99 shall apply *mutatis mutandis* to Class B flammable liquids.

(b) elektriese draadleidings wat heeltemal deur naatlose metaalbuise, waarvan die lasse vasgeskroef word, beskerm is, of kabels van die gepantserde tipe deur die Brandweerhoof goedgekeur; en

(c) elektriese apparaat wat vlamdig vervaardig is en vir ventilasiedoeleindes gebruik word.

(3)(a) Die spuitlokale, waaiers en uitlaatopeninge moet skoon en vry van vlambare aanpaksels gehou word, en alle waaiers en openinge moet te alle tye in 'n behoorlik werkende toestand wees, en indien dit skoon geskraap moet word ten einde aan die bepalings van hierdie subartikel te voldoen, moet dit met nie-ysterhoudende instrumente geskied.

(b) Alle dromme, blikke of dergelike houers wat vlambare vloeistowwe of bestanddele bevat of bevat het, en nog nie ontgas of op 'n ander manier onskadelik gemaak is nie, moet deeglik toegehou word wanneer dit nie gebruik word nie, en moet, nadat die inhoud gebruik is, uit die spuitlokaal verwyder en op sodanige plek gehou word waar dit, na die mening van die Brandweerhoof, waarskynlik nie gevaar sal inhou of 'n versperring sal veroorsaak of mense of diere in geval van 'n brand sal verhinder of belemmer om na veiligheid te ontsnap nie.

(4) Die Brandweerhoof kan na goeddunke redelike afwyking van die bepalings van hierdie artikel toelaat indien hy daarvan oortuig is dat dit nie 'n brandgevaar sal skep, of die gevaar van brand verhoog of mense, diere of ander eiendom in geval van 'n brand, in gevaar sal stel nie.

Gevaarkennisgewings by Ingang.

104. Die woorde "GEVAAR — MOENIE ROOK NIE" moet opvallend in albei amptelike tale in letters, minstens 150 mm hoog, aan die buitekant van die ingang tot elke spuitlokaal aangebring word en moet te alle tye op dié plek in 'n duidelik leesbare toestand in stand gehou word.

Wanneer 'n Permit nie Vereis word nie.

105. Geen bepaling in artikels 101 tot en met 104 vervat, verbied die bespuiting van enige voertuig of artikel in die buitelug met vlambare vloeistof nie indien sodanige bespuiting minstens 15 m van enige vuur, vlam, oop lig of ander middel wat sodanige vlambare vloeistof of die dampe daarvan aan die brand kan laat slaan, plaasvind, en indien die Brandweerhoof van mening is dat sodanige bespuiting ingeval van 'n brand nie moontlik mense of diere sal verhinder om te ontkom, of enige vertrek of gebou in gevaar sal stel nie.

Menglokale.

106. Die bepalings van artikels 81, 88, 90, 95 en 98 is *mutatis mutandis* van toepassing op menglokale.

Bepalings waar Klas A Vlambare Vloeistowwe Gebruik of Hanteer word.

107. Die bepalings van artikel 96(a) tot en met (f), (h) en (i) is *mutatis mutandis* van toepassing op Klas A vlambare vloeistowwe.

Bepalings waar Klas B Vlambare Vloeistowwe Gebruik of Hanteer word.

108. Die bepalings van artikel 99 is *mutatis mutandis* van toepassing op Klas B vlambare vloeistowwe.

Liquified Petroleum Gases.

109.(1) No person shall cause or permit—

(a) the filling of any receptacle or vehicle with liquified petroleum gas on any premises;

(b) the use, handling or storage of liquified petroleum gas on any premises; or

(c) the use of any vehicle for the conveyance of liquified petroleum gas at or in any public place,

unless the requirements of the Code of Practice for the Handling, Storage and Distribution of Liquified Petroleum Gas in Domestic, Commercial and Industrial Installations of the South African Bureau of Standards have been complied with and written permission has been obtained from the Chief Fire Officer.

(2) The provision of the codes of practice relating to the Handling, Storage and Distribution of Petroleum Products including Liquified Petroleum Gas, compiled by the South African Bureau of Standards; Code SABS 087 Parts I to VII and Code SABS 089 Parts I and II, shall be in force within the municipality and shall be deemed to form a part of these by-laws.

Gas-filled Toys.

110.(1) No person shall—

(a) fill with hydrogen gas any balloon or other device without the permission of the Chief Fire Officer, in writing;

(b) use or display any balloon or other device filled with hydrogen gas inside any building to which the public ordinarily has access or which is used as a club: Provided that the use and sale of balloons filled with hydrogen gas for meteorological, scientific or educational purposes shall not be prohibited.

(2) For the purposes of this section the term "hydrogen gas" shall include any mixture of gases in which hydrogen is present unless the mixture is neither flammable nor explosive in air.

CARBIDE.

Certificate of Registration in Respect of Storage.

111.(1) No person shall keep or store carbide in excess of 900 kg on any premises unless such person is in possession of a certificate of registration in respect of such premises.

(2) No certificate of registration shall be issued in respect of any premises for the storage of carbide until the provisions of these by-laws have been complied with in respect of such premises.

(3) Such certificate—

(a) shall state the maximum amount of carbide permitted to be stored on the premises;

(b) may be issued subject to such conditions as are deemed necessary by the Council, having regard to the circumstances pertaining to each application.

(4) Every such certificate shall be valid only until the next succeeding 31st day of December.

Vloeibare Petroleumgasse.

109.(1) Niemand mag toelaat of veroorsaak—

(a) dat enige houer of voertuig met vloeibare petroleumgas op enige perseel gevul word nie;

(b) dat vloeibare petroleumgas op enige perseel gebruik, gehanteer of opgeberg word nie; of

(c) dat enige voertuig vir die vervoer van vloeibare petroleumgas op of in enige openbare plek gebruik word nie,

tensy die vereistes van die Gebruikskode vir die Hantering, Bewaring en Distribusie van Vloeibare Petroleumgas in Huishoudelike, Kommersiële en Nywerheidsinstallasies van die Suid-Afrikaanse Buro vir Standaarde nagekom en skriftelike toestemming verkry is van die Brandweerhoof.

(2) Die bepalings van die gebruikskode opgestel deur die Suid-Afrikaanse Buro vir Standaarde betreffende die Hantering, Bewaring en Distribusie van Petroleumprodukte, insluitende Petroleumgas; Kode SABS 087 Deel I tot VII en Kode SABS 089 Deel I en II, is binne die munisipaliteit van toepassing en word geag 'n deel van hierdie verordeninge te vorm.

Speelgoed wat met Gas Gevul is.

110.(1) Niemand mag—

(a) sonder die skriftelike toestemming van die Brandweerhoof 'n ballon of ander toestel met waterstof vul nie;

(b) 'n ballon of ander toestel wat met waterstof gevul is, binne 'n gebou waartoe die publiek gewoonweg toegang het of wat as 'n klub dien, gebruik of vertoon nie: Met dien verstande dat die gebruik en verkoop van ballonne wat met waterstof gevul is vir meteorologiese, wetenskaplike of opvoedkundige doeleindes nie verbied word nie.

(2) Vir die toepassing van hierdie artikel omvat die woord "waterstof" ook enige mengsel van gasse waarin waterstof aanwesig is, tensy die mengsel nog ontvlambaar, nog ontplofbaar in lug is.

KARBIED.

Registrasiesertifikaat ten Opsigte van Opberging.

111.(1) Niemand mag meer as 900 kg karbied op enige perseel hou of opberg nie, tensy so 'n persoon in besit is van 'n registrasiesertifikaat ten opsigte van sodanige perseel.

(2) Geen registrasiesertifikaat vir die opberging van karbied op 'n perseel word uitgereik alvorens daar aan die bepalings van hierdie verordeninge ten opsigte van sodanige perseel voldoen is nie.

(3) Sodanige sertifikaat—

(a) moet die grootste hoeveelheid karbied wat op die perseel opgeberg mag word, aangee;

(b) kan uitgereik word, onderworpe aan sodanige voorwaardes as wat die Raad, met inagneming van die omstandighede verbonde aan elke aansoek, noodsaaklik ag.

(4) Elke sodanige sertifikaat is slegs tot op die eersvolgende 31ste dag van Desember geldig.

(5) No certificate of registration, other than a renewal thereof, shall be issued in respect of any premises until the provisions of section 112 have been complied with and the application therefor has been approved by the Council.

Application for a Certificate of Registration.

112.(1) Every application for a certificate of registration, accompanied by the charges prescribed in Schedule 1 hereto, shall be made in writing to the Council on a form to be provided by the Council for the purpose.

(2) Every such application shall be accompanied by a plan of the premises in respect of which the certificate is required, drawn to a scale of not less than 1:100 and showing the elevation of the premises in relation to adjacent buildings above or below the ground.

(3) Every such application shall also be accompanied by a block plan drawn to a scale of not less than 1:500 which shall specify—

(a) the premises and all open spaces with stand numbers thereof and the materials of which such premises are constructed or are to be constructed;

(b) the stands with numbers thereof immediately adjoining;

(c) the names of any streets on which the site abuts and the township in which it is situated; and

(d) the north point.

(4) Where the plan relates to existing premises in respect of which a certificate of registration has been issued in terms of section 111 and to which it is proposed to make alterations or additions, only a ground plan together with such application form and the prescribed charges shall be submitted. Such ground plan shall be drawn to a scale of not less than 1:100 and shall show such additions or alterations in relation to such existing premises.

(5) All plans shall be—

(a) signed by the owner of the premises or his agent;

(b) drawn in Indian ink on tracing linen or clear prints on cloth with white ground; and

(c) coloured with fixed colours as follows:—

Block Plan:

Proposed premises or alterations: Red

Other existing buildings: Grey or a neutral colour

Open spaces: Uncoloured.

(6) On approval, such plan or plans shall become the property of the Council. On approval of such plan a written notice shall be issued with such conditions thereon as are deemed necessary by the Council.

(7) The approval of plans of premises shall in no way imply the acceptance of any responsibility on the part of the Council in regard to such premises.

(8) The approval by the Council in terms of these by-laws of any plans shall lapse and shall be null and void if the provisions of these by-laws shall not have been complied with within one year after the date of such approval.

(5) Geen registrasiesertifikaat, uitgesonderd 'n hernuwing daarvan, word ten opsigte van 'n perseel uitgereik, alvorens daar aan die bepalings van artikel 112 voldoen, en die aansoek daarvoor deur die Raad goedgekeur is nie.

Aansoek om 'n Registrasiesertifikaat.

112.(1) Elke aansoek om 'n registrasiesertifikaat moet vergesel gaan van die gelde voorgeskryf in Bylae 1 hierby en moet skriftelik by die Raad gedoen word op 'n vorm vir dié doel deur die Raad verskaf.

(2) Elke sodanige aansoek moet vergesel gaan van 'n plan van die perseel ten opsigte waarvan 'n sertifikaat vereis word, wat volgens 'n skaal van minstens 1:100 geteken is, en wat die opstand met betrekking tot die aangrensende geboue, bokant of onderkant die grond, aandui.

(3) Elke sodanige aansoek moet ook vergesel gaan van 'n blokplan wat volgens 'n skaal van minstens 1:500 geteken is, en waarop die volgende besonderhede aangedui word:

(a) Die perseel en alle oop ruimtes en die standplaasnommers daarvan, en die materiaal waarvan sodanige perseel gebou is of gebou staan te word;

(b) die aangrensende persele en hul standplaasnommers;

(c) die name van strate waaraan die terrein grens en die naam van die dorp waarin dit geleë is; en

(d) die noordpunt.

(4) Waar die plan betrekking het op 'n bestaande perseel waarvoor 'n registrasiesertifikaat ingevolge artikel 111 uitgereik is en ten opsigte waarvan dit die voorneme is om veranderings of aanbouings aan te bring, moet slegs 'n grondplan tesame met sodanige aansoekvorm en die voorgeskrewe gelde ingedien word. Sodanige grondplan moet volgens 'n skaal van minstens 1:100 geteken wees en moet sodanige aanbouings of veranderings met betrekking tot die bestaande perseel aandui.

(5) Alle planne moet—

(a) deur die eienaar van die perseel of sy agent onderteken word;

(b) met Indiese ink op natreklinne geteken of duidelik op 'n wit doek afgedruk wees; en

(c) soos volg met vaste kleure ingekleur wees:

Blokplan:

Voorgestelde persele of veranderings: Rooi

Ander bestaande geboue: Grys of 'n neutrale kleur

Ope ruimtes: Ongekleurd.

(6) Nadat 'n plan goedgekeur is, word sodanige plan of planne die eiendom van die Raad. Wanneer so 'n plan goedgekeur is, word 'n skriftelike kennisgewing uitgereik met sodanige voorwaardes as wat die Raad nodig ag.

(7) Die goedkeuring van planne ten opsigte van 'n perseel beteken geensins dat die Raad enige aanspreklikheid met betrekking tot sodanige perseel aanvaar nie.

(8) Die goedkeuring deur die Raad van enige plan ingevolge hierdie verordeninge, verval en is van nul en geen waarde indien daar nie binne een jaar na die datum van sodanige goedkeuring, aan die bepalings van hierdie verordeninge voldoen is nie.

Conditions of Certificate of Reigstration.

113.(1) No person shall store or cause or permit to be stored any quantity of carbide on any premises in excess of the amount stated on the certificate of registration relating to such premises.

(2) Any person in lawful possession of a certificate of registration may make written application to the Council for permission to increase the total quantity of carbide which may be stored in terms of such certificate. Such application shall be granted by the Council only if the proposed increase is permissible in terms of these by-laws. When the Council has granted any such application, such person shall surrender his certificate of registration to the Council for amendment.

Renewal of Certificate of Registration.

114. Application for the annual renewal of a certificate of registration shall be made not later than the 15th day of November of the year prior to that for which such renewal is required, on a form to be provided by the Council, and shall be accompanied by the charges prescribed in Schedule 1 hereto. No plans of the premises in terms of section 112 shall be required in the case of a renewal of a certificate of registration, unless called for at the discretion of the Council.

Transfer of Certificate of Registration.

115.(1) A certificate of registration may be transferred from one person to another.

(2) The person desiring such transfer shall make application in writing to the Council on a form to be provided by the Council for such purposes. Such application shall be accompanied by the prescribed charges, together with the certificate of registration relating to the premises in respect of which such transfer is desired.

(3) No certificate of registration shall be transferable from one premises to another.

Additions and Alterations to Registered Premises.

116. No additions or alterations to any existing registered premises shall be made unless and until a plan prepared in accordance with the provisions of section 112(4) shall have been submitted to and approved by the Council in writing.

Fire Appliances.

117. The person to whom a certificate of registration has been issued shall install or cause to be installed in the premises to which such certificate relates, in an easily accessible and visible position on a wall or other suitable position not less than 1 m above the level of the floor of the premises, 6 fire buckets filled with dry sand, of a capacity of 9 litres each, painted red with the word "FIRE" in both official languages painted in white and legibly maintained thereon, in terms of the Council's By-laws to Control the Handling of Fire Extinguishing Appliances.

Rules to be Observed.

118. No person shall store or cause or permit to be stored any carbide on any premises, whether registered or unregistered, unless such carbide is stored—

Voorwaardes van die Registrasiesertifikaat.

113.(1) Niemand mag meer karbied as die hoeveelheid wat aangedui word op die registrasiesertifikaat wat op sodanige perseel betrekking het, op 'n perseel opberg, laat opberg, of toelaat dat dit daar opgeberg word nie.

(2) Iemand wat in wettige besit van enige registrasiesertifikaat is, kan by die Raad skriftelik aansoek doen vir toestemming om die totale hoeveelheid karbied wat ingevolge sodanige sertifikaat opgeberg mag word, te vermeerder. Die Raad staan sodanige aansoek slegs toe indien die voorgestelde vermeerdering krägtens hierdie verordeninge toelaatbaar is. Indien die Raad die aansoek toegestaan het, moet sodanige persoon die registrasiesertifikaat by die Raad indien sodat dit gewysig kan word.

Hernuwing van die Registrasiesertifikaat.

114. Daar moet uiters op die 15e dag van November van die jaar wat die jaar voorafgaan hernuwing benodig word, aansoek gedoen word om hernuwing op 'n vorm deur die Raad verskaf, en die gelde soos by Bylae 1 hierby voorgeskryf, moet die aansoek vergesel. Geen planne van die perseel word ingevolge artikel 112 in die geval van hernuwing van 'n registrasiesertifikaat vereis nie, tensy die Raad dit na goeddunke verlang.

Oordrag van 'n Registrasiesertifikaat.

115.(1) 'n Registrasiesertifikaat kan deur een persoon aan 'n ander oorgedra word.

(2) Die persoon wat sodanige oordrag verlang, moet skriftelik by die Raad aansoek daarom doen op 'n vorm wat die Raad vir die doel verskaf. So 'n aansoek moet vergesel gaan van die voorgeskrewe gelde, asook van die registrasiesertifikaat wat betrekking het op die perseel ten opsigte waarvan sodanige oordrag verlang word.

(3) Geen registrasiesertifikaat is van een perseel op 'n ander perseel oordraagbaar nie.

Aanbouings en Veranderings aan 'n Geregistreerde Perseel.

116. Geen aanbouing of verandering mag aan enige bestaande geregistreerde perseel aangebring word, tensy en alvorens 'n plan wat ooreenkomstig die bepalings van artikel 112(4) opgestel is, by die Raad ingedien en skriftelik goedgekeur is nie.

Brandblustoestelle.

117. Die persoon aan wie 'n registrasiesertifikaat uitgereik is, moet in die perseel waarop sodanige sertifikaat betrekking het, 6 rooi geverfde brandemmers met 'n inhoudsvermoë van 9 liter elk, gevul met droë sand en waarop die woord "BRAND" in albei amptelike tale in wit geverf is en leesbaar in stand gehou moet word, op 'n maklik toegänklike en sigbare plek aan die muur of op 'n ander geskikte plek wat minstens 1 m bokant die vloeroppervlak van die perseel is, aanbring of laat aanbring, ooreenkomstig die bepalings van die Raad se Verordeninge om die Hantering van Brandblusapparate te Beheer.

Reëls wat Nagekom Moet word.

118. Niemand mag karbied op 'n geregistreerde of ongeregistreerde perseel opberg, laat opberg of toelaat dat dit opgeberg word nie, tensy sodanige karbied geberg word—

(a) in such a position that it is not in dangerous proximity to any fire, flame, open light or other agent likely to ignite flammable or explosive gas;

(b) in a dry and well ventilated position;

(c) in such a position that in the case of fire or explosion, the escape of persons or animals from such premises will not be prevented or impeded;

(d) in closed metal containers.

Inspection of Premises.

119.(1) Any duly authorized officer of the Council may, for any purpose connected with these by-laws, at all reasonable times and without previous notice enter upon any premises whatsoever and make such enquiries or examination thereon as he may deem necessary.

(2) The owner or occupier or, failing their presence on the premises, any other person employed thereon shall upon demand disclose to such authorized officer the presence of any carbide in or upon such premises, and shall answer all enquiries relating either to the observance of these by-laws or to any condition in connection with the certificate of registration.

Construction of Store.

120. Every store, room or building used for the storage of carbide in excess of 200 kg shall—

(a) be substantially constructed of non-combustible material;

(b) be of such construction and condition that all the contents thereof shall be maintained in a dry condition;

(c) be adequately ventilated to prevent the accumulation therein of flammable or explosive gas;

(d) be so situated that any gases which may be discharged therefrom are not likely to come into contact with any fire, flame, open light or other agent likely to ignite flammable or explosive gas;

(e) have no opening into or communication with any other room or building in which persons reside or which is used for public assembly or stabling of animals;

(f) be so constructed and situated that there is no possibility of danger from any fire, flame, open light or other agent likely to ignite flammable or explosive gas;

(g) be situated at ground level: Provided that any such store, room or building used for the storage of carbide in excess of 200 kg, unless situated at a distance of not less than 30 m from any other building, shall be constructed of brick or concrete and with a roof constructed of non-combustible material and shall have no opening into or communication with any other room or building.

Danger Notice of Store.

121. No person shall use or cause or permit to be used any store, room or building for the storage of carbide in excess of 900 kg unless and until the words

(a) op 'n plek wat nie gevaarlik naby aan enige vuur, vlam, oop lig of ander middel is wat moontlik vlambare of ontplofbare gas aan die brand kan laat slaan nie;

(b) op 'n droë en behoorlik-geventileerde plek;

(c) op so 'n plek dat in die geval van brand of 'n ontploffing die ontkoming van persone of diere van sodanige perseel af, nie verhinder of belemmer word nie;

(d) in metaalhouers wat toe is.

Ondersoek van Persele.

119.(1) Enige behoorlik-gemagtigde beampte van die Raad kan, vir enige doel in verband met die toepassing van hierdie verordeninge, te alle redelike tye en sonder om vooraf kennis te gee, enige perseel betree en sodanige navrae daar doen of ondersoek instel as wat hy nodig mag ag.

(2) Die eienaar of okkupant, of indien hulle nie op die perseel teenwoordig is nie, enige ander persoon wat daar in diens is, moet sodanige gemagtigde beampte op sy versoek verwittig van enige karbied wat in of op sodanige perseel is, en moet alle navrae met betrekking tot die nakoming van die bepalings van hierdie verordeninge, of met betrekking tot enige voorwaardes in verband met die registrasiesertifikaat, beantwoord.

Bou van Opbergingslokaal.

120. Elke pakkamer, vertrek of gebou wat gebruik word om meer as 200 kg karbied in op te berg, moet—

(a) stewig en van nie-brandbare materiaal gebou wees;

(b) sodanig gebou en in so 'n toestand wees dat die hele inhoud daarvan droog bly;

(c) behoorlik geventileer wees sodat vlambare of ontplofbare gas nie daarin vergaar nie;

(d) sodanig geleë wees dat gas wat daaruit ontsnap nie moontlik in aanraking kan kom met enige vuur, vlam, oop lig of ander middel wat moontlik vlambare of ontplofbare gas aan die brand kan laat slaan nie;

(e) nie 'n opening hê na, of verbind wees met, 'n ander vertrek of gebou waarin mense woon of wat vir openbare byeenkomste of die huisvesting van diere gebruik word nie;

(f) sodanig gebou, en geleë wees, dat daar geen moontlikheid van gevaar van enige vuur, vlam, oop lig of ander middel wat moontlik vlambare of ontplofbare gasse aan die brand kan laat raak, bestaan nie;

(g) op die grondvlak geleë wees: Met dien verstande dat enige sodanige pakkamer, vertrek of gebou wat gebruik word om meer as 200 kg karbied op te berg, tensy dit minstens 30 m van enige ander gebou af staan, van baksteen of beton en met 'n dak van nie-brandbare materiaal gebou moet wees, en mag geen opening na 'n ander vertrek of gebou hê of daarmee verbind wees nie.

Gevaarkennisgewings aan Opbergingslokaal.

121. Niemand mag 'n pakkamer, vertrek of gebou gebruik, laat gebruik of toelaat dat dit gebruik word met die doel om meer as 900 kg karbied daarin op te berg nie, tensy en alvorens die woorde "GEVAAR —

"DANGER — CARBIDE" in letters not less than 150 mm high, are legibly painted in both official languages on the outer face of the door of such store, room or building. Such notice shall at all times be maintained in such position in a legible condition.

Purity.

122. No person shall store, use, sell or expose for sale any carbide which is not commercially pure: Provided that no carbide containing any impurity liable to generate phosphoretted or silicuretted hydrogen in such quantities as to render the gas generated likely to ignite spontaneously, shall be considered to be commercially pure for the purpose of this section.

Seizure and Removal of Carbide.

123. Where any authorized officer of the Council has reasonable cause to believe that any storage of carbide is contrary to the provisions of these by-laws, he may seize and detain such carbide and may either require the owner or occupier or, failing their presence on the premises, any other person employed thereon to detain the carbide in those premises or in any other premises under his control, or he may remove it in such manner and to such premises as will, in his opinion, least endanger the public safety, and there detain it or take such other measures as may be necessary for the protection of the public.

Breach of Conditions.

124. Any person who commits any breach of any condition endorsed on the approval notice or certificate of registration issued in terms of these by-laws, shall be guilty of an offence in terms of these by-laws.

Penalties.

125. Any person contravening any provision of these by-laws shall be guilty of an offence and liable, on conviction —

(a) to a fine not exceeding R100 or, in default of payment, imprisonment for a period not exceeding 6 months; and

(b) in the case of a successive or continuing offence, to a fine not exceeding R10 for every day such offence continues.

SCHEDULE 1.

TARIFF OF CHARGES PAYABLE IN RESPECT OF CERTIFICATES OF REGISTRATION, SPRAY PERMITS, RENEWALS AND TRANSFERS.

	Yearly R
1. Bulk Depot	50,00
2. Dry-cleaning Room	10,00
3. Mixing Room	10,00
4. Spray Room	4,00
5. Carbide Store	10,00

KARBIED" leesbaar in albei amptelike tale, in letters minstens 150 mm hoog, op die buitekant van die deur van sodanige pakkamer, vertrek of gebou geverf is. Sodanige kennisgewing moet te alle tye op dié plek in 'n leesbare toestand in stand gehou word.

Suiwerheid.

122. Niemand mag karbied wat nie vir handelsgebruik suiwer is nie, opberg, gebruik, verkoop of te koop aanbied nie: Met dien verstande dat geen karbied wat onsuiwerhede bevat wat moontlik soveel fosfor- of silikonwaterstof kan afskei dat die gasse wat vrygestel word, moontlik vanself aan die brand kan slaan, vir die toepassing van hierdie artikel as suiwer handelskarbied beskou word nie.

Beslaglegging op en Verwydering van Karbied.

123. Indien 'n gemagtigde beampte van die Raad op billike gronde vermoed dat karbied, strydig met die bepalings van hierdie verordeninge opgeberg word, kan hy beslag lê op sodanige karbied en dit hou en hy kan die eienaar of okkupant, of indien hulle nie op die perseel teenwoordig is nie, enige ander persoon wat daar in diens is, aansê om die karbied in dié perseel of in enige ander perseel onder sy beheer te hou, of hy kan dit op so 'n wyse en na sodanige perseel verwyder wat, na sy mening, die veiligste vir die publiek is en dit daar hou, of hy kan enige ander reëlings tref wat hy ter beveiliging van die publiek noodsaaklik ag.

Verbreking van die Voorwaardes.

124. Iemand wat 'n voorwaarde verbreek wat geëndosseer is op die goedkeuringskennisgewing of die registrasiesertifikaat kragtens hierdie verordeninge uitgereik, is skuldig aan 'n misdryf ingevolge hierdie verordeninge.

Strafbepaling.

125. Iemand wat enige bepaling van hierdie verordeninge oortree, is skuldig aan 'n misdryf en by skuldigbevinding strafbaar met —

(a) 'n boete van hoogstens R100 of, by wanbetaling, gevangenisstraf vir 'n tydperk van hoogstens 6 maande; en

(b) in die geval van agtereenvolgende of voortdurende oortredings, 'n boete van hoogstens R10 vir elke dag wat die misdryf voortduur.

BYLAE 1.

TARIEF VAN GELDE BETAALBAAR TEN OPSIGTE VAN REGISTRASIESERTIFIKATE, SPUITLOKAALPERMITTE, HERNUWINGS EN OORDRAGTE.

	Jaarliks R
1. Grootmaatdepot	50,00
2. Droogskoonmaaklokaal	10,00
3. Menglokaal	10,00
4. Spuitlokaal	4,00
5. Karbiedopbergingslokaal	10,00

	Yearly R
6. Premises other than those mentioned above:	
(1) Up to and including 2,3 kl storage capacity	4,00
(2) Up to and including 4,5 kl storage capacity	6,00
(3) Up to and including 23 kl storage capacity	8,00
(4) Up to and including 45 kl storage capacity	10,00
(5) Above 45 kl storage capacity	20,00

7. Transfer of certificate of registration or spray permit: R1.

8.(1) For the issue of every certificate of registration or spray permit, the yearly charges shall be as prescribed in this Schedule: Provided that if liability to pay the charges arises on or after 1 July in any year, the charges payable shall be half the yearly charges.

(2) For the annual renewal of a certificate of registration or spray permit, the charges payable shall be as prescribed in this Schedule.

SCHEDULE 2.

TARIFF OF CHARGES IN RESPECT OF EXAMINATION OF VEHICLES FOR TRANSPORT PERMIT.

Description of Vehicle.

	Half-yearly R
1. Road tank wagon	4,00
2. Motor vehicle, other than a road tank wagon, designed to be used for the conveyance of flammable liquids in excess of the quantity permitted in terms of section 80(1)(a) and (b)	2,00
3. Any vehicle, other than a motor vehicle or road tank wagon, designed to be used for the conveyance of flammable liquids in excess of the quantity permitted in terms of section 80(1)(a) and (b)	1,00

PB. 2-4-2-49-46

Administrator's Notice 1549 19 October, 1977

BENONI MUNICIPALITY: AMENDMENT TO DRAINAGE AND PLUMBING BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinfater, which have been approved by him in terms of section 99 of the said Ordinance.

The Drainage and Plumbing By-laws of the Benoni Municipality, published under Administrator's Notice

	Jaarliks R
6. Persele wat nie hierbo vermeld word nie:	
(1) Tot en met 'n opbergingsvermoë van 2,3 kl	4,00
(2) Tot en met 'n opbergingsvermoë van 4,5 kl	6,00
(3) Tot en met 'n opbergingsvermoë van 23 kl	8,00
(4) Tot en met 'n opbergingsvermoë van 45 kl	10,00
(5) Meer as 45 kl opbergingsvermoë	20,00

7. Oordrag van registrasiesertifikaat of spuitlokaalpermit: R1.

8.(1) Vir die uitreiking van elke registrasiesertifikaat of spuitlokaalpermit is die jaarlikse gelde soos voorgeskryf in hierdie Bylae: Met dien verstande dat indien aanspreeklikheid vir betaling van die gelde op of na 1 Julie van enige jaar ontstaan, die gelde betaalbaar slegs die helfte van die jaarlikse gelde is.

(2) Vir die jaarlikse hernuwing van 'n registrasiesertifikaat of spuitlokaalpermit, is die gelde betaalbaar soos in hierdie Bylae uiteengesit.

BYLAE 2.

TARIEF VAN GELDE TEN OPSIGTE VAN DIE ONDERSOEK VAN VOERTUIE VIR 'N VERVOERPERMIT.

Beskrywing van Voertuig.

	Half-jaarliks R
1. Padtenkvoertuig	4,00
2. Motorvoertuig, uitgesonderd 'n padtenkvoertuig, wat ontwerp is vir die vervoer van vlambare vloeistowwe in groter hoeveelhede as wat toelaatbaar is ingevolge artikel 80(1)(a) en (b)	2,00
3. Enige voertuig, uitgesonderd 'n motorvoertuig of padtenkvoertuig, wat ontwerp is vir die vervoer van vlambare vloeistowwe in groter hoeveelhede as wat toelaatbaar is ingevolge artikel 80(1)(a) en (b)	1,00

PB. 2-4-2-49-46

Administrateurskennisgewing 1549 19 Oktober 1977

MUNISIPALITEIT BENONI: WYSIGING VAN RIOLERINGS- EN LOODGIETERSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Riolerings- en Loodgietersverordeninge van die Munisipaliteit Benoni, afgekondig by Administrateurs-

509, dated 1 August, 1962, as amended, are hereby further amended by the substitution for Schedules A and C of the following:

"SCHEDULE A.

(Applicable to the Benoni Municipality only).

CHARGES FOR THE APPROVAL OF PLANS.

1. The charges specified in these by-laws shall be paid to the Council by the owner of, or person intending to erect, any building or any sanitary installation or fixture thereon, due regard being had to provisions and proviso's of the sections of these by-laws relating thereto.

2. The engineer shall assess the charges payable in each particular case, and in case of any difference arising in connection therewith, and due regard being had to the provisions and proviso's of the sections of these by-laws relating thereto, the matter shall be referred to and decided on by the Council.

3.(1) The minimum charge payable in respect of any drainage work shall be R5.

(2) The charges payable for any drainage work shall be calculated according to the following scale:

For every 10 m² or part thereof of the floor area of each floor of a new building or addition to an existing building:

(a) For the first 1 000 m² of the floor area: 45c.

(b) For the next 1 000 m² of the floor area: 35c.

(c) Thereafter, for any portion of the floor area in excess of the first 2 000 m²: 25c.

4. Alterations to existing buildings shall be calculated on the value of the work to be performed at a rate of R1 for every R100 or part thereof with a minimum charge of R5.

5. For every septic tank or vacuum tank, in addition to the drainage charges payable, a charge of R5 shall be payable.

SCHEDULE C.

LABOUR CHARGES.

1. The charges payable in respect of the following services, shall be the actual cost of labour, material, transport, machinery and tools used in respect of such services, plus a surcharge of 10% on such amount for administration costs:

(1) Connection to sewer in terms of section 13(4).

(2) Sealing of openings in terms of section 15(3).

(3) Removing blockages in terms of section 18(5).

2. The charges set out in item 1 shall, in terms of the provisions of section 10 of these by-laws, be payable for work, as described, which is carried out by the Council in terms of the sections specified.

kennisgewing 509 van 1 Augustus 1962, soos gewysig, word hierby verder gewysig deur Bylaes A en C deur die volgende te vervang:

"BYLAE A.

(Van toepassing slegs op die Munisipaliteit, Benoni).

GELDE VIR GOEDKEURING VAN PLANNE.

1. Die gelde in hierdie verordeninge gespesifiseer, is aan die Raad betaalbaar deur die eienaar van enige gebou, of enige sanitêre installasie, of montering daarop, of deur die persoon wat voornemens is om sodanige gebou op te rig, of om sodanige installasie of montering aan te bring, aan die Raad betaalbaar met inagneming van die bepalings en voorbehoude van die artikels in hierdie verordeninge wat daarop betrekking het.

2. Die ingenieur stel die gelde vas wat in elke besondere geval betaal moet word, en in geval van enige geskil in verband daarmee, en met inagneming van die bepalings en voorbehoude van die artikels in hierdie verordeninge wat daarop betrekking het, moet hy die geskil na die Raad vir 'n beslissing verwys.

3.(1) Die minimum geld betaalbaar vir enige rioleringswerk is R5.

(2) Die gelde betaalbaar vir enige rioleringswerk word volgens die volgende skaal bereken:

Vir elke 10 m² of gedeelte daarvan van die vloeroppervlakte van elke vloer van 'n nuwe gebou of aanbouing tot 'n bestaande gebou:

(a) Vir die eerste 1 000 m² van die vloeroppervlakte: 45c.

(b) Vir die volgende 1 000 m² van die vloeroppervlakte: 35c.

(c) Daarna, vir enige gedeelte van die vloeroppervlakte bo die eerste 2 000 m²: 25c.

4. Veranderings aan bestaande geboue word bereken volgens die waarde van die werk wat uitgevoer gaan word teen 'n skaal van R1 ten opsigte van elke R100 of gedeelte daarvan, met 'n minimumgeld van R5.

5. Vir elke septiese tenk of vakuumtenk is, behalwe die gelde wat vir riolering betaalbaar is, 'n geld van R5 betaalbaar.

BYLAE C.

GELDE VIR WERK.

1. Die gelde betaalbaar ten opsigte van die volgende dienste, bedra die werklike koste van arbeid, materiaal, vervoer, masjinerie en gereedskap wat ten opsigte van sodanige dienste gebruik word, plus 'n toeslag van 10% op sodanige bedrag vir administrasiekoste:

(1) Aansluiting by die straatriool ingevolge artikel 13(4).

(2) Verseëling van openings ingevolge artikel 15(3).

(3) Oopmaak van verstopte riole ingevolge artikel 18(5).

2. Die gelde in item 1 uiteengesit, is ingevolge die bepalings van artikel 10 van hierdie verordeninge betaalbaar vir die werk soos beskryf, en wat die Raad ingevolge gemelde artikels verrig.

3. The owner of the property on, or in respect of which, the work referred to above is carried out, shall be liable to the Council for the applicable charge relating thereto."

PB. 2-4-2-34-6

Administrator's Notice 1550 19 October, 1977

CARLETONVILLE MUNICIPALITY: AMENDMENT TO WATER SUPPLY BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Water Supply By-laws, published under Administrator's Notice 888, dated 3 October, 1951, as amended, and adopted by the Town Council of Carletonville by virtue of the powers vested in the Council by Proclamation 97 (Administrator's), 1959, are hereby further amended by the substitution for Schedule 1 to Chapter 3 of the following:

"SCHEDULE 1.

TARIFF OF CHARGES.

1. *Basic Charge.*

(1) Except as provided in subitem (4), a basic charge of R4 per month or part thereof shall be levied per erf, stand, lot or other area, with or without improvements, which is or, in the opinion of the Council, can be connected to the main, whether water is consumed or not: Provided that where any erf, stand, lot or other area is occupied by more than one consumer to whom the Council supplies water, the basic charge shall be payable in respect of each such consumer: Provided further that where the water supply to a flat-building or any other complex of buildings where flats or businesses are included and metered by means of one main water meter, the basic charge in respect of each such flat or business shall be levied.

(2) The charge in terms of subitem (1) shall be payable by the owner or occupier, who will be jointly and severally liable, of such erf, stand, lot or other area.

(3) The charge in terms of subitem (1) shall be payable in such a manner as determined by the Council from time to time.

(4) The charge in terms of subitem (1) shall not be payable in respect of those cases where the owner of an erf, stand, lot or other area has submitted satisfactory proof to the Council that such erf, stand, lot or other area has been declared unsuitable for development.

2. *Charges for the Supply of Water, per Month.*

(1) *Dwellings and Flats which are Metered Separately:*

(a) A basic charge in terms of item 1.

(b) Per kl or part thereof: 9c.

(2) *Consumers, except those mentioned in subitems (1), (3), (4), (5) and (6):*

(a) A basic charge in terms of item 1.

3. Die eienaar van die eiendom waarop, of ten opsigte waarvan, die werk waarna daar hierbo verwys word, verrig is, is vir die toepaslike geld teenoor die Raad aanspreeklik."

PB. 2-4-2-34-6

Administrateurskennisgewing 1550 19 Oktober 1977

MUNISIPALITEIT CARLETONVILLE: WYSIGING VAN WATERVOORSIENINGSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Watervoorsieningsverordeninge, afgekondig by Administrateurskennisgewing 888 van 3 Oktober 1951, soos gewysig, en aangeneem deur die Stadsraad van Carletonville ingevolge die bevoegdhede aan die Raad verleen by Proklamasie 97 (Administrateurs-), 1959, word hierby verder gewysig deur Bylae 1 by Hoofstuk 3 deur die volgende te vervang:

"BYLAE 1.

TARIEF VAN GELDE.

1. *Basiese Heffing.*

(1) Uitgesonderd soos in subitem (4) bepaal, word 'n basiese heffing van R4 per maand of gedeelte daarvan gehef per erf, standplaas, perseel of ander terrein, met of sonder verbeterings, wat by die hoofwaterpyp aangesluit is of, na die mening van die Raad, daarby aangesluit kan word, ongeag of water verbruik word al dan nie: Met dien verstande dat waar enige sodanige erf, standplaas, perseel of ander terrein geokkupeer word deur meer as een verbruiker aan wie die Raad water lewer, die basiese heffing ten opsigte van elke sodanige verbruiker gehef word: Voorts met dien verstande dat waar die watertoevoer aan 'n woonstelgebou of enige ander kompleks van geboue waarby woonstelle of besighede ingesluit is, deur een hoofwatermeter gemeet word, die basiese heffing ten opsigte van elke sodanige woonstel of besigheid gehef word.

(2) Die heffing ingevolge subitem (1) is deur die eienaar of okkupant, wie se aanspreeklikheid gesamentlik en afsonderlik is, van sodanige erf, standplaas, perseel of ander terrein betaalbaar.

(3) Die heffing ingevolge subitem (1) is betaalbaar op 'n wyse soos van tyd tot tyd deur die Raad bepaal.

(4) Die heffing ingevolge subitem (1) is nie betaalbaar nie in daardie gevalle waar die eienaar van 'n erf, standplaas, perseel of ander terrein bevredigende bewys aan die Raad lewer dat sodanige erf, standplaas, perseel of ander terrein ongeskik vir ontwikkeling verklaar is.

2. *Gelde vir die Lewering van Water, per Maand.*

(1) *Woonhuise en Woonstelle wat Afsonderlik Gemeter word:*

(a) 'n Basiese heffing ingevolge item 1.

(b) Per kl of gedeelte daarvan: 9c.

(2) *Verbruikers, behalwe dié vermeld in subitems (1), (3), (4), (5) en (6):*

(a) 'n Basiese heffing ingevolge item 1.

(b) Per kl or part thereof: 12c.

(3) *Bulk Supply to Township Owners, including the Provincial Hospital:*

(a) A basic charge in terms of item 1.

(b) Per kl or part thereof: 8c.

(4) *Industrial Purposes:*

(a) A basic charge in terms of item 1.

(b) Per kl or part thereof: 9c.

(5) *Consumers who have Direct Connections to the Water Mains of the Rand Water Board and who have their own Reticulation Systems:*

(a) A service charge of R4,50.

(b) Per kl or part thereof: 9c.

(6) *Municipal Consumption:*

The consumption of water shall be charged for at cost.

3. *Charges for Connecting Water Supply.*

(1) For connecting the water supply which has been disconnected at a consumer's request: 75c.

(2) For connecting the water supply which has been disconnected for a breach of these by-laws: R1,25.

(3) For providing and fixing a 20 mm communication pipe and meter: R75.

(4) For providing and fixing a 25 mm or bigger communication pipe and meter, the total charges payable to effect such a connection, including labour, transport, materials and equipment, plus a surcharge of 15% on such amount, shall be levied.

(5) For providing and fixing a 15 mm or 20 mm standpipe and tap: R4.

4. *Charges in connection with Meters.*

(1) For a special reading of a meter: 25c.

(2) For removing or re-installing a meter at the request of a consumer: R1,25.

(3) For testing a meter supplied by the Council, in cases where it is found that the meter does not show an error of more than 5% either way: R1,75.

(4) For testing of a private meter up to 25 mm in size: R1.

(5) For testing of a private meter of all sizes exceeding 25 mm, and for any special test: R2.

(6) For rental of a portable meter, per month: R1.

(7) Deposit for a portable meter: R10.

(8) For taking water from a street hydrant and not passing through a meter; per day or part thereof: R10.

5. *Definitions.*

For the purposes of this Tariff of Charges —

'owner' means and includes the registered owner of the land or premises, or his authorized agent, or any person receiving the rents or profits issuing therefrom,

(b) Per kl of gedeelte daarvan: 12c.

(3) *Lewering by die Grootmaat aan Dorpseienaars, insluitende die Provinsiale Hospitaal:*

(a) 'n Basiese heffing ingevolge item 1.

(b) Per kl of gedeelte daarvan: 8c.

(4) *Nywerheidsdoeleindes:*

(a) 'n Basiese heffing ingevolge item 1.

(b) Per kl of gedeelte daarvan: 9c.

(5) *Verbruikers wat Direkte Aansluitingspunte by die Randwaterraad het en wat oor hulle eie Netwerkstelsel Beskik:*

(a) 'n Diensheffing van R4,50.

(b) Per kl of gedeelte daarvan: 9c.

(6) *Munisipale Verbruik:*

Die verbruik van water word teen koste gehef.

3. *Gelde vir Aansluiting van Watertoevoer.*

(1) Vir die aansluiting van die watertoevoer wat op versoek van 'n verbruiker afgesluit is: 75c.

(2) Vir die aansluiting van die watertoevoer wat weens 'n oortreding van hierdie verordeninge afgesluit is: R1,25.

(3) Vir die aanbring en aanlê van 'n 20 mm-verbindingspyp en meter: R75.

(4) Vir die verskaffing en aanlê van 'n 25 mm-verbindingspyp of 'n groter verbindingspyp en meter, word die totale koste om die aansluiting te maak, insluitende arbeid, vervoer, materiaal en uitrusting, plus 'n toeslag van 15% op sodanige bedrag gevorder.

(5) Vir die verskaffing en aanbring van 'n 15 mm- of 20 mm-staanpyp en kraan: R4.

4. *Gelde in verband met Meters.*

(1) Vir 'n spesiale aflesing van 'n meter: 25c.

(2) Vir die verwydering of die herinstallering van 'n meter op versoek van 'n verbruiker: R1,25.

(3) Vir die toets van 'n meter wat deur die Raad verskaf word, in gevalle waar bevind is dat die meter nie meer as 5% te min of te veel aanwys nie: R1,75.

(4) Vir die toets van 'n privaatmeter tot die grootte van 25 mm: R1.

(5) Vir die toets van 'n privaatmeter van alle groottes bo 25 mm en vir 'n spesiale toets: R2.

(6) Vir die huur van 'n verplaasbare meter, per maand: R1.

(7) Deposito vir 'n verplaasbare meter: R10.

(8) Vir die tap van water uit 'n brandkraan in die straat en wat nie deur 'n meter gaan nie, per dag of gedeelte daarvan: R10.

5. *Woordomskywing.*

Vir die toepassing van hierdie Tarief van Gelde beteken —

'eienaar' ook die geregistreerde eienaar van die grond of perseel of sy gevolmagtigde agent, of enigeen wat die huurgeld of winste wat daaruit voortvloei, ontvang, of

or who would receive such rents or profits if such land or premises were let, whether on his own account or as agent for any person entitled thereto or interested therein;

'occupier' means any person in occupation of premises at any relevant time;

'premises' means any land and any building, dwelling, flat, business, erection or structure, above or below the surface of any land and includes any aircraft, vehicle or vessel."

The provisions in this notice contained, shall be deemed to have come into operation on 1 July, 1977.

PB. 2-4-2-104-146

Administrator's Notice 1551 19 October, 1977

GRASKOP MUNICIPALITY: SANITARY AND REFUSE REMOVALS TARIFF.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Sanitary and Refuse Removals Tariff of the Graskop Municipality, as contemplated by section 19(a) of Chapter 1 under Part IV of the Public Health By-laws of the Council, published under Administrator's Notice 148, dated 21 February, 1951, shall be as follows:

SANITARY AND REFUSE REMOVALS TARIFF.

1. *Removal of Night-soil and Urine.*

For the removal of night-soil and urine, twice per week, except as provided in item 3, per month:

(1) For the first pail: R4.

(2) For each additional pail: R2.

2. *Removal of Domestic Refuse.*

For the removal of domestic refuse, once per week, except as provided in item 3, per bin, per month: R2.

3. *Services to Bantu Location.*

(1) For the removal of night-soil and urine, per pail, per month: R1.

(2) For the removal of domestic refuse, per bin, per month: R1.

4. *Vacuum Tank Services.*

For the removal of sewage or waste water or both:

(1) *Hotels, Motels and Flats:*

(a) For the first 100 kl, per kl or part thereof: 50c.

(b) Thereafter, per kl or part thereof: 30c.

(c) Minimum charge, per month: R40.

(2) *Businesses, Sawmills and Workshops:*

(a) For the first 100 kl, per kl or part thereof: 50c.

wat sodanige huurgeld of winste sou ontvang indien sodanige grond of perseel verhuur was, hetsy vir eie rekening of as agent vir iemand wat daartoe geregtig is of daarby belang het;

'okkupant' iemand wat 'n perseel op enige betrokke tydstip okkupeer;

'perseel' enige grond en enige gebou, woonhuis, woonstel, besigheid, montering of struktuur bo- of onderkant die oppervlak van enige grond en sluit enige vliegtuig, voertuig of skip in."

Die bepalings in hierdie kennisgewing vervat, word geag op 1 Julie 1977 in werking te getree het.

PB. 2-4-2-104-146

Administrateurskennisgewing 1551 19 Oktober 1977

MUNISIPALITEIT GRASKOP: SANITÊRE EN VULLISVERWYDERINGSTARIEF.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Sanitêre en Vullisverwyderingstarief van die Munisipaliteit Graskop, soos beoog by artikel 19(a) van Hoofstuk 1 onder Deel IV van die Publieke Gesondheidsverordeninge van die Raad, afgekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, is soos volg:

SANITÊRE EN VULLISVERWYDERINGSTARIEF.

1. *Verwydering van Nagvuil en Urine.*

Vir die verwydering van nagvuil en urine, twee keer per week, uitgesonderd soos in item 3 bepaal, per maand:

(1) Vir die eerste emmer: R4.

(2) Vir elke bykomende emmer: R2.

2. *Verwydering van Huishoudelike Vullis.*

Vir die verwydering van huishoudelike vullis, een keer per week, uitgesonderd soos in item 3 bepaal, per blik, per maand: R2.

3. *Dienste aan Bantoelokasie:*

(1) Vir die verwydering van nagvuil en urine, per emmer, per maand: R1.

(2) Vir die verwydering van huishoudelike vullis, per blik, per maand: R1.

4. *Vakuumtenkdienste.*

Vir die verwydering van rioolvuil of vuilwater, of albei:

(1) *Hotelle, Motelle en Woonstelblokke:*

(a) Vir die eerste 100 kl, per kl of gedeelte daarvan: 50c.

(b) Daarna, per kl of gedeelte daarvan: 30c.

(c) Minimum vordering, per maand: R40.

(2) *Besighede, Saagmeulens en Werkswinkels:*

(a) Vir die eerste 100 kl, per kl of gedeelte daarvan: 50c.

(b) Thereafter, per kl or part thereof: 30c.

(c) Minimum charge, per business, per month: R5.

(3) *Dwellings:*

(a) Per kl or part thereof: 50c.

(b) Minimum charge, per month: R5.

(4) *Where a vacuum tank serves more than one dwelling:*

Per dwelling, per month: R5.

(5) *Where the contents of a septic tank is removed:*

(a) Per kl or part thereof: R2.

(b) Minimum charge, per removal: R12.

5. *Septic Tanks and French Drains.*

For the removal of sludge and waste, per 5 kl or part thereof: R15.

6. *Removal of Garden Refuse.*

For the removal of garden refuse on side-walks, per load: R2.

7. *Cleaning of Premises.*

Per erf: R15.

8. *Removal and Disposal of Dead Animals:*

(1) Horses, mules, cattle and donkeys, each: R1.

(2) Calves, foals, sheep, goats and pigs, each: 75c.

(3) Cats and dogs, each: 25c.

The Sanitary and Refuse Removals Tariff of the Graskop Municipality, published under Administrator's Notice 1490, dated 28 August, 1974, as amended, is hereby revoked.

PB. 2-4-2-81-84

Administrator's Notice 1552 19 October, 1977

KRUGERSDORP MUNICIPALITY: AMENDMENT TO PARKING GROUNDS BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Parking Grounds By-laws of the Krugersdorp Municipality, published under Administrator's Notice 570, dated 11 May, 1977, are hereby amended by the substitution in the Schedule for the figure "40c", wherever it occurs, of the figure "20c".

The provisions in this notice contained, shall be deemed to have come into operation on 1 September, 1977.

PB. 2-4-2-125-18

(b) Daarna, per kl of gedeelte daarvan: 30c.

(c) Minimum vordering, per besigheid, per maand: R5.

(3) *Woonhuise:*

(a) Per kl of gedeelte daarvan: 50c.

(b) Minimum vordering, per maand: R5.

(4) *Waar 'n suigtenk meer as een woonhuis bedien:*

Per woonhuis, per maand: R5.

(5) *Waar die inhoud van 'n septiese tenk verwyder word:*

(a) Per kl of gedeelte daarvan: R2.

(b) Minimum vordering, per verwydering: R12.

5. *Septiese Tenks en Stapelriole.*

Vir die verwydering van slyk en afval, per 5 kl of gedeelte daarvan: R15.

6. *Verwydering van Tuinafval.*

Vir die verwydering van tuinafval op sypaadjies, per vrag: R2.

7. *Skoonmaak van Persele.*

Per erf: R15.

8. *Verwydering en Wegdoen van Dooie Diere.*

(1) Perde, muile, beeste en donkies, elk: R1.

(2) Kalwers, vullens, skape, bokke en varke, elk: 75c.

(3) Katte en Honde, elk: 25c.

Die Sanitêre en Vullisverwyderingstarief van die Munisipaliteit Graskop, afgekondig by Administrateurskennisgewing 1490 van 28 Augustus 1974, soos gewysig, word hierby herroep.

PB. 2-4-2-81-84

Administrateurskennisgewing 1552 19 Oktober 1977

MUNISIPALITEIT KRUGERSDORP: WYSIGING VAN PARKEERTERREINVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Parkeerterreinverordeninge van die Munisipaliteit Krugersdorp, afgekondig by Administrateurskennisgewing 570 van 11 Mei 1977, word hierby gewysig deur in die Bylae die syfer "40c", waar dit ook al voorkom, deur die syfer "20c" te vervang.

Die bepalings in hierdie kennisgewing vervat, word geag op 1 September 1977 in werking te getree het.

PB. 2-4-2-125-18

Administrator's Notice 1553 19 October, 1977

MESSINA MUNICIPALITY: ADOPTION OF STANDARD WATER SUPPLY BY-LAWS.

1. The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes that the Town Council of Messina has in terms of section *96bis*(2) of the said Ordinance, adopted without amendment the Standard Water Supply By-laws, published under Administrator's Notice 21, dated 5 January, 1977, as by-laws made by the said Council.

2. The Water Supply By-laws, published under Administrator's Notice 1044, dated 19 November, 1952, and made applicable *mutatis mutandis* to the Messina Municipality, by Administrator's Notice 46, dated 26 January, 1955, as amended, excepting the Water Tariff under Annexure XX of Schedule 1 to Chapter 3A and Schedule 1 to Chapter 6, are hereby revoked.

PB. 2-4-2-104-96

Administrateurskennisgewing 1553 19 Oktober 1977

MUNISIPALITEIT MESSINA: AANNAME VAN STANDAARD WATERVOORSIENINGSVERORDENINGE.

1. Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Stadsraad van Messina die Standaard Watervoorsieningsverordeninge, afgekondig by Administrateurskennisgewing 21 van 5 Januarie 1977, ingevolge artikel 96*bis*(2) van genoemde Ordonnansie sonder wysiging aangeneem, het as verordeninge wat deur genoemde Raad opgestel is.

2. Die Watervoorsieningsverordeninge, afgekondig by Administrateurskennisgewing 1044 van 19 November 1952, en *mutatis mutandis* van toepassing gemaak op die Munisipaliteit Messina by Administrateurskennisgewing 46 van 26 Januarie 1955, soos gewysig, uitgesonderd die Watertarief onder Aanhangsel XX van Bylae 1 by Hoofstuk 3A en Bylae 1 by Hoofstuk 6, word hierby herroep.

PB. 2-4-2-104-96

Administrator's Notice 1554 19 October, 1977

MEYERTON MUNICIPALITY: ADOPTION OF STANDARD DRAINAGE BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes that the Town Council of Meyerton has in terms of section *96bis*(2) of the said Ordinance, adopted without amendment the Standard Drainage By-laws, published under Administrator's Notice 665, dated 8 June, 1977, as by-laws made by the said Council.

PB. 2-4-2-34-97

Administrateurskennisgewing 1554 19 Oktober 1977

MUNISIPALITEIT MEYERTON: AANNAME VAN STANDAARD RIOLERINGSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Stadsraad van Meyerton die Standaard Rioleringsverordeninge, afgekondig by Administrateurskennisgewing 665 van 8 Junie 1977, ingevolge artikel 96 *bis*(2) van genoemde Ordonnansie sonder wysiging aangeneem het as verordeninge wat deur genoemde Raad opgestel is.

PB. 2-4-2-34-97

Administrator's Notice 1555 19 October, 1977

MEYERTON MUNICIPALITY: AMENDMENT TO WATER SUPPLY REGULATIONS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Water Supply Regulations of the Meyerton Municipality, published under Administrator's Notice 498, dated 29 December, 1943, as amended, are hereby further amended as follows:

1. By the substitution in section 20 for the figure "£1" of the figure "R4".

2. By the substitution in item 2 of the Tariff of Charges —

(a) in subitem (1)(a) for the figure "15c" of the figure "17,5c";

(b) in subitem (1)(b) for the figure "R1,65" of the figure "R2";

(c) in subitem (2)(a) for the figure "R15" of the figure "R17,50";

Administrateurskennisgewing 1555 19 Oktober 1977

MUNISIPALITEIT MEYERTON: WYSIGING VAN WATERBEWARINGSREGULASIES.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Waterbewaringsregulasies van die Munisipaliteit Meyerton, afgekondig by Administrateurskennisgewing 498 van 29 Desember 1943, soos gewysig, word hierby verder soos volg gewysig:

1. Deur in artikel 20 die syfer "£1" deur die syfer "R4" te vervang.

2. Deur in item 2 van die Tarief van Gelde —

(a) in subitem (1)(a) die syfer "15c" deur die syfer "17,5c" te vervang;

(b) in subitem (1)(b) die syfer "R1,65" deur die syfer "R2" te vervang;

(c) in subitem (2)(a) die syfer "R15" deur die syfer "R17,50" te vervang;

(d) in subitem (2)(b) for the figure "10,5c" of the figure "12,26c";

(e) in subitem (2)(c) for the figure "8,5c" of the figure "9,92c"; and

(f) in subitem (2)(d) for the figure "R12" of the figure "R21".

PB. 2-4-2-104-97

Administrator's Notice 1556 19 October, 1977

MIDDELBURG MUNICIPALITY: AMENDMENT TO TRAFFIC BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, read with section 166 of the Road Traffic Ordinance, 1966, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the first-mentioned Ordinance.

The Traffic By-laws of the Middelburg Municipality, published under Administrator's Notice 135, dated 25 February, 1959, as amended, are hereby further amended by the substitution for Schedule A under the Annexure of the following:

"SCHEDULE A.

TARIFF OF LICENCE FEES.

Description.	*Yearly.* R
1. For each public vehicle drawn by animals and offered for hire:	
(1) With two wheels	1,00
(2) With four wheels	2,00
2. For each public vehicle offered for hire for the conveyance of passengers, goods or material, standing or being driven in any street:	
(1) Ricksha	2,00
(2) Taxi	20,00
(3) Truck or truck tractor	20,00
(4) Tractor	20,00
(5) Public bus	40,00
(6) Trailer	10,00
3. For each petrol pump on sidewalk	30,00
4. For each air or water device on sidewalk	30,00
5. For each advertisement or advertising device, other than verandah signs, on sidewalk	30,00
6. For each transfer of a licence	1,00
7. For each duplicate licence (including licence badge)	1,00."

PB. 2-4-2-98-21

(d) in subitem (2)(b) die syfer "10,5c" deur die syfer "12,26c" te vervang;

(e) in subitem (2)(c) die syfer "8,5c" deur die syfer "9,92c" te vervang; en

(f) in subitem (2)(d) die syfer "R12" deur die syfer "R21" te vervang.

PB. 2-4-2-104-97

Administrateurskennisgewing 1556 19 Oktober 1977

MUNISIPALITEIT MIDDELBURG: WYSIGING VAN VERKEERSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, gelees met artikel 166 van die Ordonnansie op Padverkeer, 1966, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van eersgenoemde Ordonnansie goedgekeur is.

Die Verkeersverordeninge van die Munisipaliteit Middelburg, afgekondig by Administrateurskennisgewing 135 van 25 Februarie 1959, soos gewysig, word hierby verder gewysig deur Bylae A onder die Aanhangsel deur die volgende te vervang:

"BYLAE A.

TARIEF VAN LISENSIEGELDE.

Beskrywing.	*Jaarliks.* R
1. Vir elke openbare voertuig deur diere getrek wat te huur aangebied word:	
(1) Met twee wiele	1,00
(2) Met vier wiele	2,00
2. Vir elke openbare voertuig wat te huur aangebied word vir die vervoer van passasiers, goedere of materiaal, wat in 'n straat staan of bestuur word:	
(1) Riksja	2,00
(2) Taxi	20,00
(3) Vrag- of voorspanmotor	20,00
(4) Trekker	20,00
(5) Openbare bus	40,00
(6) Sleepwa	10,00
3. Vir elke petrolpomp op sypad	30,00
4. Vir elke lug- of watertoestel op sypad	30,00
5. Vir elke advertensie of advertensietoestel, uitgesonderd verandatekens, op sypad	30,00
6. Vir elke oordrag van lisensie	1,00
7. Vir elke duplikaatlisensie (insluitend lisensiekenteken)	1,00."

PB. 2-4-2-98-21

Administrator's Notice 1557 19 October, 1977

MIDDELBURG MUNICIPALITY: AMENDMENT TO BY-LAWS RELATING TO DOGS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The By-laws Relating to Dogs of the Middelburg Municipality, published under Administrator's Notice 2277, dated 20 December, 1972, as amended, are hereby further amended as follows:

1. By the substitution in section 2 for the word "three" of the word "two".

2. By the substitution in section 6(2)(a) for the figure "R10" of the figure "R30".

3. By the substitution for paragraph (b) of section 6(2) of the following:

"(b) in respect of any other dog —

(i) which is a male dog or sterilised bitch:

(aa) for the first male dog or sterilised bitch: R2.

(bb) for the second male dog or sterilised bitch: R10.

(ii) which is a bitch which has not been sterilised:

(aa) for the first bitch: R20.

(bb) for the second bitch: R30:

Provided that in respect of a sterilised bitch a certificate issued by a veterinary officer must be produced stating that such bitch has been sterilised, failing which, the tax shall be payable in terms of subparagraph (ii) as if such bitch has not been sterilised."

The provisions in this notice contained, shall come into operation on 1 January, 1978.

PB. 2-4-2-33-21

Administrator's Notice 1558 19 October, 1977

NYLSTROOM MUNICIPALITY: AMENDMENT TO ELECTRICITY BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Electricity By-laws of the Nylstroom Municipality, adopted by the Council under Administrator's Notice 27, dated 3 January, 1973, as amended, are hereby further amended by the substitution for items 9, 10, 11, 12 and 13 of the Tariff of Charges under the Schedule of the following:

"9. *Charges for the Inspection of Consumers' Faults.*

When the Electricity Department is requested to investigate a power failure and it is found that the failure was caused by a faulty installation or apparatus, the

Administrateurskennisgewing 1557 19 Oktober 1977

MUNISIPALITEIT MIDDELBURG: WYSIGING VAN VERORDENINGE BETREFFENDE HONDE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Verordeninge Betreffende Honde van die Munisipaliteit Middelburg, afgekondig by Administrateurskennisgewing 2277 van 20 Desember 1972, soos gewysig, word hierby verder soos volg gewysig:

1. Deur in artikel 2 die woord "drie" deur die woord "twee" te vervang.

2. Deur in artikel 6(2)(a) die syfer "R10" deur die syfer "R30" te vervang.

3. Deur paragraaf (b) van artikel 6(2) deur die volgende te vervang:

"(b) ten opsigte van enige ander hond —

(i) wat 'n reun of gesteriliseerde teef is:

(aa) vir die eerste reun of gesteriliseerde teef: R2.

(bb) vir die tweede reun of gesteriliseerde teef: R10.

(ii) wat 'n teef is wat nie gesteriliseer is nie:

(aa) vir die eerste teef: R20.

(bb) vir die tweede teef: R30:

Met dien verstande dat daar ten opsigte van 'n gesteriliseerde teef 'n sertifikaat van 'n veearts getoon moet word dat so 'n teef onvrugbaar gemaak is, by gebreke waarvan die belasting ingevolge subparagraaf (ii) betaalbaar is asof so 'n teef nie gesteriliseer is nie."

Die bepalings in hierdie kennisgewing vervat, tree op 1 Januarie 1978 in werking.

PB. 2-4-2-33-21

Administrateurskennisgewing 1558 19 Oktober 1977

MUNISIPALITEIT NYLSTROOM: WYSIGING VAN ELEKTRISITEITSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Elektrisiteitsverordeninge van die Munisipaliteit Nylstroom, deur die Raad aangeneem by Administrateurskennisgewing 27 van 3 Januarie 1973, soos gewysig, word hierby verder gewysig deur items 9, 10, 11, 12 en 13 van die Tarief van Gelde onder die Bylae deur die volgende te vervang:

"9. *Gelde vir Ondersoek van Verbruikersfoute.*

Wanneer die Elektrisiteitsdepartement versoek word om 'n kragonderbreking te ondersoek en waar daar bevind word dat die onderbreking aan 'n fout in die in-

following charges shall be payable for each investigation:

(a) *Within the Municipality:*

(i) During normal office hours: R5.

(ii) Any other time: R10.

(b) *Outside the Municipality:*

Charges in terms of paragraph (a), plus 15c per km travelled.

10. *Charges for a Special Meter Reading.*

(1) The meters of consumers shall be read as near as practicable at monthly intervals. Where a consumer requests the Council to read his meter at any time other than the specified date, the following charges shall be payable:

(a) *Within the Municipality:*

(i) During normal office hours: R2.

(ii) Sundays and public holidays: R10.

(iii) Any other time: R5.

(b) *Outside the Municipality:*

Charges in terms of paragraph (a), plus 15c per km travelled.

(2) Where a consumer disputes the reading of a meter and requests that the meter be re-read, the charges in terms of subitem (1) shall be payable if such later reading confirms the original reading to be correct.

11. *Reconnection Charges.*

Where a consumer's electricity supply is disconnected because of a contravention of the provisions of these by-laws or failing to pay his account or any reason, at his own request, the following charges shall be applicable before reconnection.

(a) *Within the Municipality:*

(i) During normal office hours: R5.

(ii) Sundays and public holidays: R15.

(iii) Any other time: R10.

(b) *Outside the Municipality:*

Charges in terms of paragraph (a), plus 30c per km travelled.

12. *Charges for Testing the Accuracy of Meters.*

(1) *Within the Municipality:* R10.

(2) *Outside the Municipality:*

Charges in terms of subitem (1), plus 15c per km travelled for the removal of the meter and replacing it.

13. *Charges for Re-inspection and Re-testing of Installations.*

(1) *Within the Municipality:* R20.

(2) *Outside the Municipality:*

Charges in terms of subitem (1), plus 15c per km travelled."

stallasie of aan foutiewe werking van apparate, wat gebruik word met die installasie te wyte is, betaal die verbruiker vir elke ondersoek die volgende gelde:

(a) *Binne die Munisipaliteit:*

(i) Gedurende normale kantoorure: R5.

(ii) Enige ander tyd: R10.

(b) *Buite die Munisipaliteit:*

Gelde ingevolge paragraaf (a), plus 15c vir elke km gereis.

10. *Gelde vir 'n Spesiale Meteraflesing.*

(1) Verbruikers se meters word so na as moontlik met tussenpose van een maand afgelees. Waar 'n verbruiker die Raad versoek om sy meter te enige ander tyd as die gespesifiseerde datum af te lees, is die volgende gelde vir sodanige aflesing betaalbaar.

(a) *Binne die Munisipaliteit:*

(i) Gedurende normale kantoorure: R2.

(ii) Sondae en openbare vakansiedae: R10.

(iii) Enige ander tyd: R5.

(b) *Buite die Munisipaliteit:*

Gelde ingevolge paragraaf (a), plus 15c vir elke km gereis.

(2) Waar 'n verbruiker die lesing van 'n elektriese meter betwis en versoek dat die meter herafgelees word, en dit blyk dat die oorspronklike lesing korrek was, is die gelde ingevolge subitem (1) betaalbaar.

11. *Heraansluitingsgelde.*

Waar 'n verbruiker se toevoer gestaak is as gevolg van 'n oortreding van die bepalings van hierdie verordeninge of wanbetaling van sy rekening, of, om enige rede op sy eie versoek, is die volgende gelde betaalbaar voor heraansluiting:

(a) *Binne die Munisipaliteit:*

(i) Gedurende normale kantoorure: R5.

(ii) Sondae en openbare vakansiedae: R15.

(iii) Enige ander tyd: R10.

(b) *Buite die Munisipaliteit:*

Gelde ingevolge paragraaf (a), plus 30c vir elke km gereis.

12. *Gelde vir Toets van Juistheid van Meters.*

(1) *Binne die Munisipaliteit:* R10.

(2) *Buite die Munisipaliteit:*

Gelde ingevolge subitem (1), plus 15c vir elke km gereis om die meter af te haal en terug te plaas.

13. *Gelde vir Herinspeksie of Hertoetsing van Installasies.*

(1) *Binne die Munisipaliteit:* R20.

(2) *Buite die Munisipaliteit:*

Gelde ingevolge subitem (1), plus 15c vir elke km gereis."

The provisions in this notice contained, shall come into operation as from the first reading of the meter after the date of publication hereof.

PB. 2-4-2-36-65

Administrator's Notice 1559 19 October, 1977

NYLSTROOM MUNICIPALITY: AMENDMENT TO TOWN LANDS BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Town Lands By-laws of the Nylstroom Municipality, published under Administrator's Notice 1885, dated 29 October, 1975, as amended, are hereby further amended by the substitution for Schedule B of the following:

"SCHEDULE B.

Sundry Charges.

1. Cutting of grass, reeds, bushes or thatching, per 100 bundles: R5.

2. Removal of sand, gravel, red soil, peat or loose stones, per m³ or part thereof: R1."

PB. 2-4-2-95-65

Administrator's Notice 1560 19 October, 1977

ORKNEY MUNICIPALITY: AMENDMENT TO BY-LAWS FOR THE FIXING OF FEES FOR THE ISSUING OF CERTIFICATES, THE FURNISHING OF INFORMATION AND COPIES OF PLANS, THE HIRING OF EQUIPMENT AND SUNDRY MATTERS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The By-laws for the Fixing of Fees for the Issuing of Certificates, the Furnishing of Information and Copies of Plans, the Hiring of Equipment and Sundry Matters of the Orkney Municipality, published under Administrator's Notice 264, dated 2 March, 1977, are hereby amended by the substitution for Schedule III of the following:

"SCHEDULE III.

	Per hour or part thereof R
1. Loader	21,00
2. Grader	21,00
3. Lorry	8,00
4. Roller (pneumatic tyre)	6,00

Die bepalings in hierdie kennisgewing vervat, tree vanaf die eerste meteraflesing na die datum van publikasie hiervan in werking.

PB. 2-4-2-36-65

Administrateurskennisgewing 1559 19 Oktober 1977

MUNISIPALITEIT NYLSTROOM: WYSIGING VAN DORPSGRONDEVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Dorpsgrondeverordeninge van die Munisipaliteit Nylstroom, afgekondig by Administrateurskennisgewing 1885 van 29 Oktober 1975, soos gewysig, word hierby verder gewysig deur Bylae B deur die volgende te vervang:

"BYLAE B.

Diverse Gelde.

1. Sny van gras, riete, bosse of dekgras, per 100 bondels: R5.

2. Verwydering van sand, gruis, rooi grond, turf of los klippe, per m³ of gedeelte daarvan: R1."

PB. 2-4-2-95-65

Administrateurskennisgewing 1560 19 Oktober 1977

MUNISIPALITEIT ORKNEY: WYSIGING VAN VERORDENINGE INSAKE DIE VASSTELLING VAN GELDE VIR DIE UITREIKING VAN SERTIFIKATE, DIE VERSKAFFING VAN INLIGTING EN AFDRUKKE VAN PLANNE, DIE HUUR VAN TOERUSTING EN ALLERLEI AANGELEENTHEDE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Verordeninge insake die Vasstelling van Gelde vir die Uitreiking van Sertifikate, die Verskaffing van Inligting en Afdrukke van Planne, die Huur van Toerusting en Allerlei Aangeleenthede van die Munisipaliteit Orkney, afgekondig by Administrateurskennisgewing 264 van 2 Maart 1977, word hierby gewysig deur Bylae III deur die volgende te vervang:

"BYLAE III.

	Per uur of gedeelte daarvan R
1. Laaigraaf	21,00
2. Padskraper	21,00
3. Vragmotor	8,00
4. Roller (lugband)	6,00

	Per hour or part thereof R
5. Roller (steel tyre)	10,00
6. Chip spreader	6,00
7. Water tank trailer	3,00
8. Tractor equipped with hydraulic loading-pin	8,00
9. Trailer	3,00
10. Tractor	4,00
11. Lawn mower	4,00
12. Sundry small equipment	2,00
	Per 100 m² or part thereof R
13. Swingfog generator	3,00

(The above charges include services of operators and fuel, where applicable)."

PB. 2-4-2-40-99

Administrator's Notice 1561 19 October, 1977

OTTOSDAL MUNICIPALITY: AMENDMENT TO LIBRARY BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Library By-laws of the Ottosdal Municipality, adopted by the Council under Administrator's Notice 366, dated 3 May, 1967, are hereby amended as follows:

1. By the substitution in sections 1, 2(8) and (9) for the word "organizer" wherever it occurs, of the word "Director".

2. By the substitution in section 6 for the words "not less than three cents" of the words "ten cents" and the deletion of the proviso thereto.

PB. 2-4-2-55-100

Administrator's Notice 1562 19 October, 1977

OTTOSDAL MUNICIPALITY: ADOPTION OF STANDARD BY-LAWS RELATING TO CAFES, RESTAURANTS AND EATING-HOUSES.

1. The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes that the Village Council of Ottosdal has, in terms of section *96bis*(2) of the said Ordinance, adopted without amendment the Standard By-laws Relating to Cafes, Restaurants and Eating-houses, published under Administrator's Notice 492, dated 27 April, 1977, as by-laws made by the said Council.

2. Chapters 10, 14 and 15 of the Public Health By-laws of the Ottosdal Municipality, published under Ad-

	Per uur of gedeelte daarvan R
5. Roller (staalband)	10,00
6. Klipspreier	6,00
7. Watertenksleepwa	3,00
8. Trekker toegerus met hidrouliese laaibak	8,00
9. Sleepwa	3,00
10. Trekker	4,00
11. Grassnyer	4,00
12. Allerlei klein toerusting	2,00
	Per 100 m² of gedeelte daarvan R
13. Termiese vogontwikkelaar	3,00

(Voorgemelde gelde sluit, waar van toepassing, brandstof en dienste van operateurs in)."

PB. 2-4-2-40-99

Administrateurskennisgewing 1561 19 Oktober 1977

MUNISIPALITEIT OTTOSDAL: WYSIGING VAN BIBLIOTEEKVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Biblioteekverordeninge van die Munisipaliteit Ottosdal, deur die Raad aangeneem by Administrateurskennisgewing 366 van 3 Mei 1967, word hierby soos volg gewysig:

1. Deur in artikels 1, 2(8) en (9) die woord "organisator", waar dit ook al voorkom, deur die woord "Direkteur" te vervang.

2. Deur in artikel 6 die woorde "minstens drie sent" deur die woorde "tien sent" te vervang en die voorbehoudsbepaling daarby te skrap.

PB. 2-4-2-55-100

Administrateurskennisgewing 1562 19 Oktober 1977

MUNISIPALITEIT OTTOSDAL: AANNAME VAN STANDAARDVERORDENINGE BETREFFENDE KAFEES, RESTAURANTE EN EETHUISE.

1. Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Dorpsraad van Ottosdal die Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise, afgekondig by Administrateurskennisgewing 492 van 27 April 1977, ingevolge artikel *96bis*(2) van genoemde Ordonnansie sonder wysiging aangeneem het as verordeninge wat deur genoemde Raad opgestel is.

2. Hoofstukke 10, 14 en 15 van die Publieke Gesondheidsverordeninge van die Munisipaliteit Ottosdal, af-

ministrator's Notice 148, dated 21 February, 1951, are hereby deleted.

PB. 2-4-2-22-100

Administrator's Notice 1563 19 October, 1977

PHALABORWA MUNICIPALITY: ADOPTION OF AMENDMENT TO STANDARD FOOD-HANDLING BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes that the Town Council of Phalaborwa has in terms of section 96*bis*(2) of the said Ordinance, adopted the amendment to the Standard Food-handling By-laws, published under Administrator's Notice 378, dated 30 March, 1977, as by-laws made by the said Council.

PB. 2-4-2-176-112

Administrator's Notice 1564 19 October, 1977

PIETERSBURG MUNICIPALITY: AMENDMENT TO ELECTRICITY BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Electricity by-laws of the Pietersburg Municipality adopted by the Council under Administrator's Notice 891, dated 7 June, 1972, as amended, are hereby further amended as follows:

1. By the substitution in section 1 for the definition of "consumer" of the following:

" 'consumer' means the occupier of any premises which the Council has contracted to supply electricity or the owner thereof, or any person who has entered into a contract with the Council for the supply of electricity or who is lawfully obtaining electricity from the Council;"

2. By the substitution for item 4 of Part A of the Tariff of Charges under the Schedule of the following:

"4. *Bulk Supply.*

(1) This tariff shall apply to —

(a) industrial consumers and school complexes with less than 100 kVA installed capacity, or of which the actual metered half-hourly maximum demand is less than 50 kVA when metered;

(b) *bona fide* farmers with less than 1 000 kVA installed capacity, or of which the actual metered half-hourly maximum demand is less than 500 kVA when metered.

(i) Service charge, per month: R7.

(ii) Per unit consumed: 2,52c.

(2) This tariff shall apply to any consumer, with the exception of *bona fide* farmers mentioned in subitem (1)(b), of which the installed capacity is 100 kVA or

gekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, word hierby geskrap.

PB. 2-4-2-22-100

Administrateurskennisgewing 1563 19 Oktober 1977

MUNISIPALITEIT PHALABORWA: AANNAME VAN WYSIGING VAN STANDAARDVOEDSELHANTERINGSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Stadsraad van Phalaborwa ingevolge artikel 96*bis*(2) van genoemde Ordonnansie, die wysiging van die Standaardvoedselhanteringsverordeninge, afgekondig by Administrateurskennisgewing 378 van 30 Maart 1977, aangeneem het as verordeninge wat deur genoemde Raad opgestel is.

PB. 2-4-2-176-112

Administrateurskennisgewing 1564 19 Oktober 1977

MUNISIPALITEIT PIETERSBURG: WYSIGING VAN ELEKTRISITEITSVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Elektrisiteitsverordeninge van die Munisipaliteit Pietersburg, deur die Raad aangeneem by Administrateurskennisgewing 891 van 7 Junie 1972, soos gewysig, word hierby verder soos volg gewysig:

1. Deur in artikel 1 die woordomskrywing van "verbruiker" deur die volgende te vervang:

" 'verbruiker' die okkupant van 'n perseel waaraan die Raad kragtens 'n ooreenkoms elektrisiteit moet lewer, of die eienaar daarvan, of iemand wat met die Raad 'n kontrak aangegaan het om elektrisiteit aan hom te lewer, of wat wettiglik elektrisiteit van die Raad verkry;"

2. Deur item 4 van Deel A van die Tarief van Gelde onder die Bylae deur die volgende te vervang:

"4. *Grootmaattoevoer.*

(1) Hierdie tarief is van toepassing op —

(a) nywerheidsverbruikers en skoolkomplekse met minder as 100 kVA geïnstalleerde kapasiteit of waarvan die werklike gemeterde halfuurlikse maksimum aanvraag minder as 50 kVA is, indien dit gemeet word;

(b) *bona fide* boere met minder as 1 000 kVA geïnstalleerde kapasiteit, of waarvan die werklike gemeterde halfuurlikse maksimum aanvraag minder as 500 kVA is, indien dit gemeet word.

(i) Diensheffing, per maand: R7.

(ii) Per eenheid verbruik: 2,52c.

(2) Hierdie tarief is van toepasing op enige verbruiker, uitgesonderd *bona fide* boere genoem in subitem (1)(b), waarvan die geïnstalleerde kapasiteit 100 kVA

more, or of which the actual metered half-hourly maximum demand during any month is 50 kVA or more:

(a) Service charge, per month: R20.

(b) Per kVA of maximum demand: R3,78.

(c) For the first 100 000 units, per unit consumed: 0,95c.

(d) Thereafter, per unit consumed: 0,78c.

(e) Minimum charge, per month: R200."

PB. 2-4-2-36-24

Administrator's Notice 1565 19 October, 1977

APPLICATION OF AMENDMENT TO STANDARD FOOD-HANDLING BY-LAWS TO THE PONGOLA HEALTH COMMITTEE.

The Administrator hereby, in terms of section 126A (2) of the Local Government Ordinance, 1939, read with section 164(3) of the said Ordinance, makes the amendment to the Standard Food-handling By-laws, published under Administrator's Notice 378, dated 30 March, 1977, applicable to the Pongola Health Committee as regulations of the said Committee.

PB. 2-4-2-176-113

Administrator's Notice 1566 19 October, 1977

APPLICATION OF STANDARD BY-LAWS RELATING TO CAFES, RESTAURANTS AND EATING-HOUSES TO THE PONGOLA HEALTH COMMITTEE.

1. The Administrator hereby, in terms of section 126A(2) of the Local Government Ordinance, 1939, read with section 164(3) of the said Ordinance, makes the Standard By-laws Relating to Cafes, Restaurants and Eating-houses, published under Administrator's Notice 492, dated 27 April, 1977, applicable to the Pongola Health Committee as regulations of the said Committee.

2. Chapters 10, 14 and 15 of the Public Health Regulations, published under Administrator's Notice 148, dated 21 February 1951, and made applicable *mutatis mutandis* to the area of jurisdiction of the Pongola Health Committee by Administrator's Notice 252, dated 30 March, 1955, as amended, are hereby deleted.

PB. 2-4-2-22-113

Administrator's Notice 1567 19 October, 1977

VENTERSDORP MUNICIPALITY: AMENDMENT TO DOG AND DOG LICENCE BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Dog and Dog Licence By-laws of the Ventersdorp Municipality, published under Administrator's

of meer is, of waarvan die werklike gemeterde halfuurlikse maksimum aanvraag gedurende enige maand 50 kVA of meer is.

(a) Diensheffing, per maand: R20.

(b) Per kVA van maksimum aanvraag: R3,78.

(c) Vir die eerste 100 000 eenhede, per eenheid verbruik: 0,95c.

(d) Daarna, per eenheid verbruik: 0,78c.

(e) Minimum vordering, per maand: R200."

PB. 2-4-2-36-24

Administrateurskennisgewing 1565 19 Oktober 1977

TOEPASSING VAN WYSIGING VAN STANDAARDVOEDSELHANTERINGSVERORDENINGE OP DIE GESONDHEIDSRAAD VAN PONGOLA.

Die Administrateur maak hierby ingevolge artikel 126A(2) van die Ordonnansie op Plaaslike Bestuur, 1939, gelees met artikel 164(3) van genoemde Ordonnansie, die wysiging van Standaardvoedselhanteringsverordeninge, afgekondig by Administrateurskennisgewing 378 van 30 Maart 1977, op die Gesondheidskomitee van Pongola van toepassing as regulasies van genoemde Komitee.

PB. 2-4-2-176-113

Administrateurskennisgewing 1566 19 Oktober 1977

TOEPASSING VAN STANDAARDVERORDENINGE BETREFFENDE KAFEES, RESTAURANTE EN EETHUISE OP DIE GESONDHEIDSKOMITEE VAN PONGOLA.

1. Die Administrateur maak hierby ingevolge artikel 126A(2) van die Ordonnansie op Plaaslike Bestuur, 1939, gelees met artikel 164(3) van genoemde Ordonnansie, die Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise, afgekondig by Administrateurskennisgewing 492 van 27 April 1977, op die Gesondheidskomitee van Pongola van toepassing as regulasies van genoemde Komitee.

2. Hoofstukke 10, 14 en 15 van die Publieke Gesondheidsregulasies, afgekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, en *mutatis mutandis* van toepassing gemaak op die regsgebied van die Gesondheidskomitee van Pongola by Administrateurskennisgewing 252 van 30 Maart 1955, soos gewysig, word hierby geskrap.

PB. 2-4-2-22-113

Administrateurskennisgewing 1567 19 Oktober 1977

MUNISIPALITEIT VENTERSDORP: WYSIGING VAN VERORDENINGE BETREFFENDE HONDE EN HONDELISENSIES.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Verordeninge Betreffende Honde en Hondelisensies van die Munisipaliteit Ventersdorp, afgekondig by

Notice 972, dated 19 December, 1956, as amended, are hereby further amended as follows:

1. By the deletion of subsection (b) of section 3.

2. By the substitution in section 5(1)(a), (b), (c) and (d) for the figures "R10", "R2", "R1" and "R1" of the figures "R20", "R6", "R3" and "R3" respectively.

3. By amending section 6 by —

(a) the deletion in the heading of the words "and Badge";

(b) the deletion of paragraph (b) of subsection (1); and

(c) the deletion in subsection (2) of the words "and every metal badge".

4. By the deletion in section 7—

(a) in the heading of the words "and Badges";

(b) of the words "or metal badge", wherever they occur, and the words "or badge".

5. By the deletion in the heading of section 8 of the words "and Metal Badges".

6. By the substitution in section 9 for the expression "sections 2, 5 and 10" of the expression "sections 2 and 5".

7. By the deletion of section 10.

8. By the deletion of paragraph (b) of section 12.

9. By the deletion of sections 16 and 21.

PB. 2-4-2-33-35

Administrator's Notice 1568 19 October, 1977

VEREENIGING MUNICIPALITY: AMENDMENT TO CEMETERY BY-LAWS.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Cemetery By-laws of the Vereeniging Municipality, published under Administrator's Notice 478, dated 4 September 1946, as amended, are hereby further amended as follows:

1. By the substitution for section 28 of the following:

"28. *Restricted Number of Burials in one Grave.*

(1) Not more than two bodies shall be buried in one grave, whether or not they are buried at the same time: Provided that the requirements of sections 26 and 83 are strictly complied with at all times.

(2) The remains of not more than two cremated bodies, in containers provided by the crematorium, may be placed in the grave of a late relative. Such container shall be placed in the grave by the relatives' undertaker under the supervision of the caretaker at a time arranged beforehand. Such container shall not be placed deeper than 765 mm in the ground and shall be covered by at least 310 mm of earth. The names of any such cremated bodies shall not be included on any memorial headstone on such grave."

Administrateurskennisgewing 972 van 19 Desember 1956, soos gewysig, word hierby verder soos volg gewysig:

1. Deur subartikel (2) van artikel 3 te skrap.

2. Deur in artikel 5(1)(a), (b), (c) en (d) die syfers "R10", "R2", "R1" en "R1" onderskeidelik deur die syfers "R20", "R6", "R3" en "R3" te vervang.

3. Deur artikel 6 te wysig deur —

(a) in die kopskrif die woorde "en kenteken" te skrap;

(b) paragraaf (b) van subartikel (1) te skrap; en

(c) in subartikel (2) die woorde "en iedere metaalkenteken" te skrap.

4. Deur in artikel 7 —

(a) in die kopskrif die woorde "en metaalkentekens" te skrap;

(b) die woorde "of metaalkenteken", waar hulle ook al voorkom, en "of kenteken" te skrap.

5. Deur in die kopskrif van artikel 8 die woorde "en metaalkentekens" te skrap.

6. Deur in artikel 9 die uitdrukking "artikels 2, 5 en 10" deur die uitdrukking "artikels 2 en 5" te vervang.

7. Deur artikel 10 te skrap.

8. Deur paragraaf (b) van artikel 12 te skrap.

9. Deur artikels 16 en 21 te skrap.

PB. 2-4-2-33-35

Administrateurskennisgewing 1568 19 Oktober 1977

MUNISIPALITEIT VEREENIGING: WYSIGING VAN BEGRAAFPLAASVERORDENINGE.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van die genoemde Ordonnansie goedgekeur is.

Die Begraafplaasverordeninge van die Munisipaliteit Vereeniging, afgekondig by Administrateurskennisgewing 478 van 4 September 1946, soos gewysig, word hierby verder soos volg gewysig:

1. Deur artikel 28 deur die volgende te vervang:

"28. *Beperkte Getal Begrawings in een Graf.*

(1) Hoogstens twee lyke mag in een graf begrawe word, of hulle tegelykertyd begrawe word al dan nie: Met dien verstande dat die bepalings van artikels 26 en 83 te alle tye streng nagekom word.

(2) Die oorskot van hoogstens twee lyke wat veras is en wat in houers deur die krematorium verskaf, geplaas is, kan in die graf van 'n wyle familielid geplaas word. Sodanige houer moet in die graf geplaas word deur die familielid se ondernemer onder toesig van die opsigter op 'n tyd wat vooraf gereël is. Sodanige houer mag nie dieper as 765 mm in die grond geplaas word nie en moet met minstens 310 mm grond bedek word. Die name van enige sodanige veraste lyke mag nie op die kopstuk van die gedenkteken op sodanige graf aangebring word nie."

2. By the substitution for Schedule B of the following:

"SCHEDULE B.

TARIFF OF CHARGES.

1. *Burial Fees.*

(1) *Cemetery for Whites:*

(a) Opening and closing of grave including purchase of private grave plot for —

(i) an adult resident in the municipality or in a township or agricultural holding referred to in the proviso to section 35: R30;

(ii) a child resident in the municipality or in a township or agricultural holding referred to in the proviso to section 35: R25;

(iii) any other adult person: R60;

(iv) any other child: R50.

(b) Opening and closing of private grave plots purchased before 31 July, 1974, per grave: R20.

(2) *Coloured and Asiatic Cemeteries:*

(a) Opening and closing of grave, including purchase of private grave plot for —

(i) an adult resident in the municipality or in a township or agricultural holding referred to in the proviso to section 35: R12;

(ii) a child resident in the municipality or in a township or agricultural holding referred to in the proviso to section 35: R9;

(iii) any other adult person: R24;

(iv) any other child: R21.

(b) Opening and closing of private grave plots purchased before 31 July, 1974, per grave: R8.

2. *Maintenance of Graves: White, Coloured and Asiatic Cemeteries.*

(1) 1 Year: R10.

(2) 20 Years: R80.

(3) 30 Years: R130.

3. *Fees for the Use of the Rest House and Chapel in the Jewish Cemetery.*

For each burial: R10."

PB. 2-4-2-23-36

Administrator's Notice 1569 19 October, 1977

VEREENIGING MUNICIPALITY: BY-LAWS RELATING TO THE HIRE OF THE VEREENIGING CIVIC THEATRE.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been

2. Deur Skedule B deur die volgende te vervang:

"SKEDULE B.

TARIEF VAN GELDE.

1. *Begrafnisgelde.*

(1) *Begraafplaas vir Blankes:*

(a) Oop- en toemaak van graf, insluitend aankoop van private grafperseel vir —

(i) 'n volwasse persoon woonagtig in die munisipaliteit of in 'n stadsgebied of landbou-eiendom waarna in die voorbehoudsbepaling van artikel 35 verwys word: R30;

(ii) 'n kind woonagtig in die munisipaliteit of in 'n stadsgebied of landbou-eiendom waarna in die voorbehoudsbepaling van artikel 35 verwys: R25;

(iii) enige ander volwasse persoon: R60;

(iv) enige ander kind: R50.

(b) Oop- en toemaak van private grafpersele aangekoop voor 31 Julie 1974, per graf: R20.

(2) *Begraafplaas vir Kleurlinge en Asiërs:*

(a) Oop- en toemaak van graf insluitend aankoop van private grafperseel vir —

(i) 'n volwasse persoon woonagtig in die munisipaliteit of stadsgebied of landbou-eiendom waarna in die voorbehoudsbepaling van artikel 35 verwys word: R12;

(ii) 'n kind woonagtig in die munisipaliteit of stadsgebied of landbou-eiendom waarna in die voorbehoudsbepaling van artikel 35 verwys word: R9;

(iii) enige ander volwasse persoon: R24;

(iv) enige ander kind: R21.

(b) Oop- en toemaak van private grafpersele aangekoop voor 31 Julie 1974, per graf: R8.

2. *Onderhoud van Grafte: Begraafplaas vir Blankes, Kleurlinge en Asiërs.*

(1) 1 Jaar: R10.

(2) 20 Jaar: R80.

(3) 30 Jaar: R130.

3. *Gelde vir die Gebruik van die Rushuis en Kapèl in die Joodse Kerkhof.*

Vir elke teraardebestelling: R10."

PB. 2-4-2-23-36

Administrateurskennisgewing 1569 19 Oktober 1977

MUNISIPALITEIT VEREENIGING: VERORDENINGE BETREFFENDE DIE VERHUUR VAN VEREENIGING STADSKOUBURG.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom inge-

approved by him in terms of section 99 of the said Ordinance.

Definitions.

1. In these by-laws, unless the context otherwise indicates—

"Council" means the Town Council of Vereeniging and includes the Management Committee of that Council or any officer employed by the Council acting under any powers granted to the Council by these by-laws and which were delegated to him in terms of section 58 of the Local Government (Administration and Elections) Ordinance, 1960 (Ordinance 40 of 1960), as amended;

"Director" means the person duly appointed by the Council to control and administer the theatre;

"hirer" means the person who has concluded an agreement with the Council for the hire of the theatre and if the agreement has been signed on behalf of an organisation, society, firm or any other institution, also such organisation, society, firm or institution;

"theatre" means and includes all the accommodation in the building of the Vereeniging Civic Theatre, excepting the administrative offices, refreshment rooms, bars and sweet stalls, and includes all the auditorium furniture, loose fittings and fixtures, carpets, curtains, electrical equipment and all movables of whatever nature in the theatre building.

ARRANGEMENTS IN CONNECTION WITH THE HIRE OF THE TREATRE.

Booking and Payment of Rental.

2.(1) Any person desiring to hire the theatre and additional facilities, shall apply in writing to the Director and enter into an agreement with the Council.

(2) The tariff of charges for the hire of the theatre shall be as prescribed in Schedule A hereto.

(3) Rental shall be payable strictly in advance 50% of the rental upon booking: Provided that the balance shall be paid not later than 72 hours prior to the reserved date.

(4) If the hirer cancels the booking, he shall forfeit all moneys paid by him to the Council in respect of the hire charge, except where the Council re-lets the theatre for the time and date for which it was reserved or let to the hirer, in which event he shall only forfeit the amount, if any, by which the charge exceeds the amount received by the Council for such re-letting, unless otherwise decided by the Council.

(5) No public announcements shall be made before any booking has been confirmed and 50% of the rental has been paid. The hirer shall not use any form of publicity or publicity matter which, in the opinion of the Director, is out of keeping with the dignity of the theatre or which he considers to be unacceptable.

(6) Should the theatre be closed, owing to damage by fire or unforeseen circumstances not caused by an act of the hirer or his servants or agents, no rental shall be payable by the hirer in respect of the period during which the theatre is closed.

volge artikel 99 van genoemde Ordonnansie goedgekeur is.

Woordomskrywing.

1. In hierdie verordeninge, tensy uit die samehang anders blyk, beteken—

"Direkteur" die persoon wat deur die Raad aangestel is om die skouburg te beheer en te administreer;

"huurder" die persoon wat 'n ooreenkoms met die Raad gesluit het vir die huur van die skouburg en indien die ooreenkoms namens 'n organisasie, vereniging, firma of enige ander instelling geteken is, dan ook sodanige organisasie, vereniging, firma of instelling;

"Raad" die Stadsraad van Vereeniging en omvat die Bestuurskomitee van daardie Raad of enige beampte deur die Raad in diens geneem, handelende uit hoofde van enige bevoegdheid wat in verband met hierdie verordeninge aan die Raad verleen is en wat ingevolge artikel 58 van die Ordonnansie op Plaaslike Bestuur (Administrasie en Verkiesings), 1960 (Ordonnansie 40 van 1960), soos gewysig, aan hom gedelegeer is;

"skouburg" ook al die ruimte in die gebou van die Vereeniging Stadskouburg, met uitsondering van die administratiewe kantore, verversingskamers, kroeë en lekkergoedkrame, maar sluit in alle meubels in die gehoorsaal, los- en vaste toebehore, tapyte, gordyne, elektriese toerusting en alle roerende goedere van watter aard ook al in die skouburg-gebou.

REËLINGS IN VERBAND MET DIE VERHUUR VAN DIE SKOUBURG.

Bespreking en Betaling van Huurgeld.

2.(1) Iemand wat die skouburg en bykomende geriewe wil huur, moet by die Direkteur skriftelik daarom aansoek doen en 'n ooreenkoms met die Raad sluit.

(2) Die tarief van gelde vir die huur van die skouburg is soos in Bylae A hierby voorgeskryf.

(3) Huurgelde is stiptelik vooruitbetaalbaar teen 50% van die huurgeld met bespreking en die balans nie later nie as 72 uur voor die datum waarop die skouburg die eerste keer gebruik staan te word.

(4) Indien die huurder die bespreking kanselleer, verbeur hy alle gelde deur hom aan die Raad betaal ten opsigte van die huurheffing, tensy die skouburg deur die Raad herverhuur word vir die tyd en datum waarvoor dit vir die huurder gereserveer of aan hom verhuur is, in welke geval hy slegs die bedrag, indien enige, waarmee die heffing die bedrag deur die Raad ontvang ten opsigte van sodanige herverhuring oorskry, verbeur, tensy anders deur die Raad besluit.

(5) Geen openbare aankondigings mag gemaak word voordat enige bespreking bekragtig is en 50% van die huurgeld betaal is nie. Die huurder mag geen vorm van reklame of reklamestof gebruik wat volgens die oordeel van die Direkteur nie met die waardigheid van die skouburg strook nie en wat na sy mening onaanvaarbaar is.

(6) Indien die skouburg as gevolg van brand of onvoorsiene omstandighede, wat nie aan 'n handeling van die huurder of sy werksmense of agente toe te skryf is nie, gesluit word, is geen huurgelde ten opsigte van die tyd wat die skouburg gesluit is deur die huurder betaalbaar nie.

(7) The hirer shall be liable for payment of any expenditure whatsoever incurred by his authorized representatives or employees.

(8) Bookings at the full rental shall at all times receive preference above bookings for normal rehearsals and the latter shall be regarded as preliminary bookings and subject to alteration according to subsequent bookings at the full rental: Provided that this provision shall not be applicable to dress rehearsals.

Standby Service.

3. Where, in the opinion of the Chief Fire Officer, the nature of a function or assemblage in the theatre renders it desirable for a fireman or firemen to be present, such attendance shall be compulsory, and the charge per fireman for such attendance shall be as fixed by the Council from time to time in its Fire Brigade By-laws, and be payable by the hirer.

Application of Tariff.

4. In the event of any dispute or doubt arising as to the tariff which shall apply to any particular class of function for which the theatre, equipment or service is hired, the Council's decision shall be final.

Reservation of Right of Letting and Cancellation of Letting.

5.(1) The Council reserves the discretionary right to refuse to let the theatre or any part thereof or to cancel the booking thereof, whether or not the term of lease has already commenced, in order to maintain law and order or to safeguard the public or the theatre in general.

(2) In the event of refusal to let the theatre or termination of the agreement of lease in terms of subsection (1), the Council shall compensate to the hirer the full amount, without interest, which he paid in respect of the hire, or if the termination occurred during the term of lease, a proportional part thereof, but it shall not be liable to pay the hirer or any other person any amount as compensation or damages or otherwise as a result of such refusal or termination.

SCOPE OF HIRE AND PROVISIONS IN CONNECTION THEREWITH.

Right of Admission.

6.(1) The Council reserves the right of admission to the theatre at all times and all persons shall in the opinion of the Director be suitably dressed in conformity with the dignity of the theatre.

(2) The number of persons admitted to the auditorium shall be limited to the number of seats provided.

Admission of Public and Sale of Tickets.

7.(1) The Director shall be responsible for all arrangements in connection with the admission of the public to the theatre, the sale of tickets and programmes, control of admission, ushering to seats, as well as obtaining police services if required.

(7) Die huurder is aanspreeklik vir die betaling van enige uitgawe hoegenaamd wat deur sy gemagtigde verteenwoordigers of werknemers aangegaan word.

(8) Besprekings teen die volle huurgeld geniet te alle tye voorkeur bo besprekings vir normale repetisies en laasgenoemde word slegs as voorlopige besprekings beskou en is aan wysiging onderhewig na gelang van latere besprekings teen die volle huurgeld: Met dien verstande dat hierdie bepaling nie op kleedrepetisies van toepassing is nie.

Bystanddiens.

3. Waar, na die mening van die Brandweerhoof, die aard van 'n verrigting of byeenkoms in die skouburg die aanwesigheid van 'n brandweerman of brandweermanne wenslik maak, is sodanige bywoning verpligtend en die vordering per brandweerman vir sodanige bywoning is soos van tyd tot tyd deur die Raad se Brandweerverordeninge bepaal en is deur die huurder betaalbaar.

Toepassing van Tarief.

4. Ingeval enige geskil of twyfel ontstaan aangaande die tariefskaal wat van toepassing is op enige besondere soort byeenkoms waarvoor die skouburg, toerusting of diens gehuur moet word, berus die beslissing by die Raad.

Reg om te Verhuur en om Verhuring te Kanselleer Voorbehou.

5.(1) Die Raad behou hom die reg voor om na goeddunke die vehuur van die skouburg of enige deel daarvan te weier of om die bespreking daarvan te kanselleer, of die huurtermyn reeds begin het al dan nie, ten einde wet en orde te handhaaf òf om die publiek òf die skouburg in die algemeen te beveilig.

(2) In die geval van weiering om die skouburg te verhuur of die beëindiging van die huurooreenkoms ingevolge subartikel (1), vergoed die Raad aan die huurder die volle bedrag, sonder rente, wat hy ten opsigte van die huur betaal het of, indien die beëindiging plaasvind gedurende die huurtermyn, 'n proporsionele gedeelte daarvan, maar is nie aanspreeklik om aan die huurder of enige ander persoon enige bedrag as vergoeding of skadevergoeding of andersins te betaal as gevolg van sodanige weiering of beëindiging nie.

OMVANG VAN HUUR EN BEPALINGS IN VERBAND DAARMEE.

Reg van Toegang.

6.(1) Die reg van toegang tot die skouburg word te alle tye deur die Raad voorbehou, en alle persone moet volgens die oordeel van die Direkteur behoorlik in ooreenstemming met die waardigheid van die skouburg gekleed wees.

(2) Die aantal persone wat in die gehoorsaal toegelaat word, word beperk tot die aantal sitplekke wat voorsien is.

Toelating van Publiek en Verkoop van Kaartjies.

7.(1) Die Direkteur is verantwoordelik vir alle reëlings in verband met die toelating van die publiek tot die skouburg, die verkoop van kaartjies en programme, die beheer van toegang, die aanwys van sitplekke, asook die verkryging van polisiedienste, indien benodig.

(2) The reservation of seats will be managed by the Council on behalf of the hirer and the admission tickets will be provided by the Council.

Hours of Availability of Theatre.

8. The theatre shall be available to the hirer daily from 10h00 to 23h30, or such other period as the Director may decide, according to circumstances.

Electrical Equipment.

9. The Council's electrician shall be the only person authorized and permitted to operate the dimming and electrical equipment, and the operation of all other electrical appliances and equipment, including air conditioning installations, shall be under his direct control and supervision: Provided that if any other person is permitted to operate the first-mentioned equipment, it shall always take place under the direct supervision of the Council's electrician. The hirer shall be liable for payment of overtime to the Council's electrician for any services rendered by the Council after normal working hours.

Stage Personnel.

10. The hirer shall appoint his own stage personnel but the Council's stage technician shall be on duty at all performances. If deemed necessary by the Director, stage assistants shall be made available by the Council for a performance and the hirer shall be responsible for payment of overtime to such assistants as prescribed at Part 2 of Schedule A hereto.

Pianos.

11. No piano, except that provided by the Council, shall be brought into the theatre without the permission of the Director.

Backstage Dressingrooms.

12. The backstage dressingrooms shall be under the custody and control of the hirer and he shall be responsible for any loss or damage that may occur therein.

Furniture and Equipment.

13.(1) No furniture or articles of any description, belonging to the Council, shall be removed from the theatre or moved from one part of the theatre to another without the permission of the Director. Chairs, benches and tables shall under no circumstances be brought into the theatre except for use on the stage only. The Director may prohibit the use of any device, contrivance or theatrical property likely to cause damage to the theatre, unless adequate precautionary measures are taken by the hirer.

(2) No alterations to the stage, curtains, loose fittings, fixtures, electrical equipment, plugs and light points shall be made without the permission of the Director. All such work shall be carried out under the supervision of the Council's electrician and/or stage technician.

Display of Posters or Flags.

14.(1) No outside posters, notices, decorations, flags, pictures or advertisements shall be allowed on any part

(2) Alle plekbesprekings sal deur die Raad vir die huurder behartig word en die toegangskaartjies sal deur die Raad voorsien word.

Ure van Beskikbaarheid van Skouburg.

8. Die skouburg is daagliks vir die huurder beskikbaar vanaf 10h00 tot 23h30, of sodanige ander tydperk as wat die Direkteur, na gelang van omstandighede kan besluit.

Elektriese Toerusting.

9. Die Raad se elektrisiën is die enigste persoon wat gemagtig en toegelaat is om die verdof- en elektriese toerusting te hanteer, en die werking van alle ander elektriese toestelle en toerusting, insluitende lugreëling-installasies, is onder sy direkte beheer en toesig: Met dien verstande dat indien enige ander persoon toegelaat word om eersgenoemde toerusting te hanteer, dit te alle tye onder die direkte toesig van die Raad se elektrisiën moet geskied. Die huurder is aanspreeklik vir die betaling van oortyd aan die Raad se elektrisiën vir enige dienste deur die Raad buite normale werksure gelewer.

Verhoogpersoneel.

10. Die huurder moet sy eie verhoogpersoneel aanstel, maar die Raad se verhoogtegnikus is op diens by alle opvoerings. Indien dit deur die Direkteur nodig geag word, word verhoogassistente deur die Raad beskikbaar gestel vir 'n opvoering en die huurder is aanspreeklik vir die betaling van oortyd aan sodanige assistente soos voorgeskryf by Deel 2 van Bylae A hierby.

Klaviere.

11. Geen klavier, behalwe dié deur die Raad beskikbaar gestel, mag sonder die toestemming van die Direkteur in die skouburg gebring word nie.

Kleedkamers agter Verhoog.

12. Die kleedkamers agter die verhoog is onder die sorg en beheer van die huurder en hy is verantwoordelik vir enige verlies of skade wat daarin mag voorkom.

Ameublement en Toerusting.

13.(1) Geen meubels of goedere van enige aard wat aan die Raad behoort mag, sonder toestemming van die Direkteur, uit die skouburg verwyder of van een deel van die skouburg na 'n ander verskuif word nie. Stoele, banke en tafels mag onder geen omstandighede, behalwe alleenlik vir gebruik op die verhoog, in die skouburg gebring word nie. Die Direkteur kan die gebruik van enige middel of toestel of toneelbenodigdhede wat moontlik enige skade aan die skouburg kan veroorsaak verbied tensy voldoende voorsorgmaatreëls deur die huurder getref word.

(2) Geen veranderinge aan die verhoog, gordyne, los en vaste toebehore, elektriese toerusting, stopkontakte en ligpunte mag sonder die toestemming van die Direkteur gedoen word nie. Alle sodanige werk moet onder die toesig van die Raad se elektrisiën en/of verhoogtegnikus uitgevoer word.

Vertoning van Aanplakbiljette of Vlae.

14.(1) Sonder die voorafverkreë skriftelike toestemming van die Direkteur word geen buite-aanplakbiljette,

of the theatre without the previously obtained written consent of the Director and then only on such places as indicated by the Director and subject to such conditions as the Council may impose.

(2) No interior decorations of any nature shall be allowed on the floor, walls or ceiling of the auditorium or foyer of the theatre.

(3) No nails, drawing pins, clamps or screws shall be driven or screwed into or fitted onto the walls or fittings of the theatre and nothing shall be attached thereto by adhesive tape.

Prohibition on Broadcasting.

15. The broadcasting of any performance, recital or speech by means of a public address system, loudspeaker or recorder outside the theatre shall only be permitted with the prior written consent of the Council.

Advertisements in Theatre.

16. The Council reserves the right to display advertisements in the theatre before commencement of performances and during intervals and retains the right to all income derived from such advertisements.

Liquor and Refreshments.

17.(1) No refreshments, sweets, chocolates, cigarettes, cigars or tobacco shall be sold to the public by the hirer.

(2) No intoxicating liquor or liquid refreshments of any kind whatsoever may be brought into the auditorium or consumed therein, nor may intoxicating liquor be brought into or consumed in the dressingrooms or any part of the backstage without the permission of the Director.

Cast Party.

18. No cast party shall be held in any part of the theatre without the permission of the Director and such party shall not continue later than 23h59 on Saturday and 01h00 on week nights.

Removal of Hirer's Property From Theatre Premises.

19. The hirer shall remove from the premises all the property under his control, excepting any property belonging to the Council, before 09h00 on the first day after termination of the lease, unless the Director grants an extension to a later specified time. Should the hirer fail to remove such property within seven days after termination of the lease, the Council shall be entitled to sell the property or otherwise at its discretion dispose thereof: Provided that any proceeds from such sale shall be for the account of the Council.

Passages and Notices Shall be Lighted and Kept Unobstructed.

20.(1) No person shall obstruct a passage, corridor, step or other entrance or exit by placing a chair or any other obstruction therein, and no person shall lock, bolt

kennisgewings, dekorasies, vlae, afbeeldings of reklame op enige deel van die skouburg toegelaat nie, en dan slegs op sodanige plekke as wat die Direkteur aanwys, onderworpe aan sodanige voorwaardes as wat die Raad kan bepaal.

(2) Geen binnedekorasies van enige aard word op die vloer, teen die mure of teen die plafon van die gehoorsaal of voorportaal van die skouburg toegelaat nie.

(3) Geen spykers, drukspykers, kramme of skroewe mag in die mure of monterings van die skouburg geslaan, gedraai of aangebring word nie en ook mag niks deur kleefband daaraan bevestig word nie.

Verbod op Uitsendings.

15. Die uitsending van enige opvoering, voordrag of toespraak deur middel van 'n openbare spreekstelsel, luidspreker of opnemers buite die skouburg, word slegs met die voorafverkreë skriftelike toestemming van die Raad toegelaat.

Advertensies in Skouburg.

16. Die Raad behou hom die reg voor om advertensies in die skouburg voor die aanvang van opvoerings sowel as gedurende pouses van opvoerings te vertoon, en het die reg op die opbrengs van sodanige advertensies.

Drank en Verversings.

17.(1) Die huurder mag geen verversings, lekkergoed, sjokolade, sigarette, sigare of tabak aan die publiek verkoop nie.

(2) Geen bedwelmende drank of vloeibare verversings van watter aard ook al mag in die gehoorsaal gebring of daarin gebruik word nie, en bedwelmende drank mag nie sonder toestemming van die Direkteur in die kleedkamers of enige agterdeel van die verhoog gebring of daar gebruik word nie.

Toneelgeselligheid.

18. Geen toneelgeselligheid mag sonder die toestemming van die Direkteur in enige deel van die skouburg na afloop van 'n opvoering gehou word nie en sodanige geselligheid mag nie later as 23h59 op Saterdag- en 01h00 gedurende weeksaande voortduur nie.

Verwydering van Huurder se Eiendom Vanaf Skouburgperseel.

19. Die huurder moet voor 09h00 op die eerste dag na die verstryking van die huur, al die eiendom onder sy beheer, met uitsluiting van enige raadseiendom, van die perseel verwyder, tensy die Direkteur tot 'n latere vasgestelde tyd uitstel verleen. By versuim om sodanige eiendom binne sewe dae na verstryking van die huur te verwyder, is die Raad geregtig om die eiendom te verkoop of dit op 'n ander manier na goeddunke van die hand te sit: Met dien verstande dat enige opbrengs voortspruitend uit sodanige verkoping tot voordeel van die Raad sal wees.

Deurgange en Kennisgewings Moet Verlig en Onbelemmerd Gehou Word.

20.(1) Niemand mag 'n gang, deurgang, trap of ander ingangs- of uitgangsweg belemmer deur 'n stoel of enige ander belemmering daarin te plaas nie en nie-

or otherwise fasten a door which is used or provided for public entrance and exit, in such a manner that it cannot be opened immediately without a key or other appliance, or attach or use any adhesive thereon except as prescribed.

(2) No person shall intentionally or maliciously extinguish any light whilst the building is open to the public, and no hirer or occupier shall fail to keep all stairs, passages, porch, lobby and other entrance and exit ways properly lighted.

(3) No person shall intentionally obscure, conceal or efface the notices or signs in the theatre.

Protection Against Fire or Accident.

21.(1) No hirer or user shall neglect or fail to maintain in proper condition and position, all or any of the apparatus, appliances, notices or signs which are provided as protective agents against fire or accident in the theatre or any passage or corridor giving entrance thereto.

(2) The hirer shall not keep, use or permit to be kept or used within the theatre any kerosene, camphene, petrol, gas, burning liquid or any other flammable or illuminating liquid, material or substance whatever, nor permit any action which is in conflict with the provisions of any of the by-laws and regulations of the Council or any legislation of the Central Government and the Provincial Council of the Transvaal.

(3) The hirer shall not do or cause or suffer anything to be done which may vitiate the existing fire insurance policy in respect of the theatre, wich may result in the payment of increased or extra premiums.

(4) The hirer shall at all times exercise due care and diligence in the handling and use of electrical apparatus or equipment and shall take all proper and necessary precautions to prevent or minimise loss or damage by fire.

Smoking Prohibited.

22. Smoking in the auditorium, on the stage or in the stage area, save when required in the action of the play, shall be prohibited at all times, and any damage caused in this respect shall be made good by the hirer in terms of section 24(1).

LIABILITY OF HIRER.

Liability of Hirer for Compliance with Law and Municipal By-laws.

23.(1) The hirer shall duly comply with all the provisions of any law or by-laws which may be applicable to the theatre, including its use, and he shall not permit any contravention thereof.

(2) If the hirer, in the opinion of the Council, contravenes or permits or causes any other person to contravene any provision of these by-laws or any other act or by-law applicable to the theatre, the Council shall have the right to cancel the lease of the theatre at any time and no compensation shall be payable by the Council for any loss sustained by the hirer or any other

mand mag 'n deur wat vir die doel van publieke in- en uitgang gebruik of verskaf word, sluit, grendel of andersins vasmaak op so 'n manier dat dit nie onmiddellik sonder 'n sleutel of ander toestel geopen kan word nie, of enige ander bevestigingsmiddel daaraan heg of gebruik behalwe soos voorgeskryf nie.

(2) Niemand mag moedswillig of kwaadwillig enige ligte uitdoof terwyl die gebou vir die publiek oop is nie en geen huurder of okkupeerder mag nalaat om alle traparms, gange, buite- en voorportale en ander in- en uitgangsweë behoorlik verlig te hou nie.

(3) Niemand mag die kennisgewings of tekens in die lokaal moedswillig vir die gesig verberg, dit wegsteek of uitwis nie.

Beskerming Teen Brand of Ongeluk.

21.(1) Geen huurder of gebruiker mag nalaat of versuim om alle of enige van die inrigtings, toestelle, kennisgewings of tekens wat as beskermingsmiddels teen brand of ongeluk in die skouburg of enige gang of deurgang wat toegang daartoe verleen, voorsien word, in 'n behoorlike toestand en posisie te onderhou nie.

(2) Die huurder mag nie in die skouburg keroseen, kamfeen, petrol, gas, brandvloeistof of enige ander vlambare of liggewende vloeistof, materiaal of stof hoegenaamd hou of gebruik, of toelaat dat dit gehou of gebruik word, of toelaat dat enigiets gedoen word wat in stryd is met die bepalings van enige van die verordeninge en regulasies van die Raad of enige wetgewing van die Sentrale Regering en die Provinsiale Raad van Transvaal nie.

(3) Die huurder mag niks doen of veroorsaak of toelaat dat enigiets gedoen word wat die bestaande brandversekeringspolis ten opsigte van die skouburg ongeldig kan maak of die premies ten opsigte daarvan kan verhoog of bykomende premies betaalbaar maak nie.

(4) Die huurder moet te alle tye behoorlike sorg uitoefen by die hantering en gebruik van elektriese apparate of toerusting en moet alle behoorlike en nodige voorsorgmaatreëls tref om verlies of skade deur brand te voorkom of tot 'n minimum te beperk.

Rook Verbode.

22. Uitgesonderd waar dit in die uitvoering as deel van die spel nodig is, is rook te alle tye in die gehoorsaal, op die verhoog of die verhooggebied verbode, en enige skade as gevolg daarvan veroorsaak, moet deur die huurder ingevolge artikel 24(1) vergoed word.

AANSPREEKLIKHEID VAN HUURDER.

Aanspreeklikheid van Huurder vir Nakoming van Wet en Munisipale Verordeninge.

23.(1) Die huurder moet alle wetsbepaling en verordeninge wat op die skouburg, insluitende die gebruik daarvan, betrekking het, behoorlik nakom en hy mag geen oortreding daarvan toelaat nie.

(2) Indien die huurder, na die mening van die Raad, enige bepaling van hierdie verordeninge of enige ander wet of verordeninge van toepassing op die skouburg oortree of veroorsaak of toelaat dat iemand dit oortree, het die Raad die reg om die huur van die skouburg te eniger tyd te kanselleer en geen vergoeding is deur die Raad betaalbaar vir enige verlies deur die huurder of enige iemand anders gely nie, en geen terugbetaling van

person, and no refund of any charges, deposits or other amounts paid shall be made to the hirer by the Council as a result of such cancellation.

Liability of Hirer for Damage to the Council's Property.

24.(1) The hirer shall be solely responsible for, and shall make good immediately any loss which may be sustained by the Council due to damage of any description whatever to the theatre, its furniture, loose fittings, fixtures, appliances, curtains, scenery, theatrical properties and generally to the property of the Council, if such damage occurred during the period of hiring and was not attributable to the negligence of the Council or its servants. The theatre shall be deemed to have been received by the hirer in good and proper order and condition and free from any defect, unless the hirer informs the Director of any defect within 24 hours after receiving possession of the theatre and, in respect of movable property, prior to putting such articles to use. The theatre shall be handed over to the Council in the same good and proper condition as received, and any movable article lost or missing shall be replaced by an article of equal value and appearance or paid for by the hirer: Provided that such hirer shall not be responsible for any damage caused in or to the auditorium by any person present therein as a *bona fide* patron during a stage presentation.

(2) The hirer shall permit the Council, its servants, agents or workmen at all reasonable times, but without interfering with any performance or rehearsal, to enter upon the premises or any part thereof for purposes of inspecting the building, fixtures, loose fittings, wardrobes, property, furniture, scenery or other articles, or to make inventories thereof or to give the hirer notice in writing of all defects, damage or losses revealed by such inspection.

Council not Liable for the Loss, Accidents or Use of or Faults in Lighting Installation or Equipment.

25.(1) The Council accepts no responsibility or liability whatever for any loss or damage which may be sustained by the hirer, or any person or persons acting with or on behalf of the hirer, or attending the theatre as licencees or invitees of the hirer, or any person associated with or employed by him, as a result of fire, theft, bodily injury or any other cause whatsoever, whether or not such loss or damage is due to negligence on the part of the Council or its servants. The hirer shall accept sole liability in respect of any such claim as contemplated by these by-laws which may be instituted against the Council or its servants or agents by any of the persons referred to herein.

(2) The Council accepts no responsibility whatever for any inconvenience caused or loss sustained due to any interruption in the electricity, air conditioning or water supply services, nor for any accident caused by the operation of such services.

(3) The Council accepts no responsibility or liability whatever in respect of any damage to or loss of any property, article or object placed or left upon the premises by the hirer for his use or purpose.

enige huurgelde, deposito's of ander bedrae betaal, word deur die Raad as gevolg van sodanige kansellasie aan die huurder gemaak nie.

Aanspreeklikheid van Huurder vir Beskadiging aan Raad se Eiendom.

24.(1) Die huurder is ten volle verantwoordelik vir, en moet onverwyld enige verliese vergoed wat die Raad mag ly as gevolg van enige skade van watter aard ook al aan die skouburg, sy meubels, los en vaste toebehore, toestelle, gordyne, dekor, toneelbenodigdhede en aan die eiendom van die Raad in die algemeen, indien sodanige skade gedurende die tydperk van huur plaasgevind het en nie aan die nalatigheid van die Raad of sy amptenare te wyte was nie. Dit word geag dat die skouburg deur die huurder in 'n goeie en behoorlike toestand en vry van enige defekte ontvang is, tensy die huurder binne 24 uur nadat hy die skouburg in ontvangs geneem het en, in geval van die roerende goedere, voordat sodanige artikels in gebruik geneem word, die Direkteur van enige defekte in kennis gestel het. Die huurder moet die skouburg in dieselfde goeie en behoorlike toestand as die waarin hy dit ontvang het, aan die Raad terug besorg, en moet enige roerende goedere wat verlore of weg is, met goedere van gelyke waarde en voorkoms vervang of daarvoor betaal: Met dien verstande dat sodanige huurder nie vir enige skade in of aan die gehoorsaal, veroorsaak deur enige persoon wat as 'n *bona fide*-besoeker by 'n verhoogaanbieding teenwoordig is, verantwoordelik is nie.

(2) Die huurder moet die Raad, sy amptenare, agente of werksmense te alle redelike tye, maar sonder enige inbreuk op uitvoerings of repetisies, toelaat om die perseel of enige deel daarvan binne te gaan om die gebou, vaste en los toebehore, hangkaste, eiendom, meubels, dekor en ander artikels te inspekteer of inventarisse daarvan te maak, of om die huurder skriftelik van enige defekte, beskadiging of verlies wat deur so 'n inspeksie blootgestel word, kennis te gee.

Raad nie Aanspreeklik nie vir Verlies, Ongelukke of Gebruik van of Foute in Beligtinginstallasie of Uitrusting.

25.(1) Die Raad aanvaar geen verantwoordelikheid of aanspreeklikheid hoegenaamd nie vir enige verlies of skade wat die huurder of enige persoon of persone wat tesame met of namens hom optree, of die skouburg besoek as vergunningshouers of uitgenooides van die huurder, of enige persoon verbonde aan of deur hom in diens geneem, mag ly as gevolg van brand, diefstal, liggaamlike besering of om enige rede hoegenaamd, of sodanige verlies of skade aan die nalatigheid van die Raad of sy amptenare toe te skryf is al dan nie. Die huurder onderneem om volle verantwoordelikheid vir enige sodanige eis soos deur hierdie verordeninge bedoel en wat teen die Raad of sy amptenare of agente deur enige van die hieringenoemde persone ingestel mag word, te aanvaar.

(2) Die Raad aanvaar geen aanspreeklikheid hoegenaamd vir enige ongerief veroorsaak of verlies gely as gevolg van enige onderbreking van die elektrisiteit-, lugreeling- of watervoorsieningsdienste, of vir enige ongeluk voortspruitend uit die werking van genoemde dienste nie.

(3) Die Raad aanvaar geen verantwoordelikheid of aanspreeklikheid hoegenaamd vir skade aan of verlies van enige eiendom, artikel of voorwerp wat deur die huurder vir sy gebruik of doel op die perseel gebring of gelaat word nie.

GENERAL.

Provisions Concerning Bioscopes.

26. If the theatre is hired for a bioscope, cartoon or cinematographic show, the hirer shall comply with the provisions of the by-laws concerning such shows which are applicable in the municipality.

Consent of Owner of Copyright shall be Required for Performance or Exhibition of any Musical or Other Works.

27.(1) The letting of the theatre in terms of these by-laws shall not be deemed to convey any sanction by the Council for the performance or exhibition of any musical or other work including recorded or taped music, without the consent of the owner of the copyright thereof in any form including the performing rights. The hirer shall be compelled to obtain the consent of any such owner to such extent as may lawfully be required and, if so required by the Council, shall produce on demand proof to the satisfaction of the Council of the grant of such consent prior to any such performance or exhibition; failure to produce such proof shall entitle the Council, unless such work be immediately withdrawn on its demand from performance or exhibition, summarily to cancel the reservation of the hired theatre and on written notice to that effect, the right of the hirer to the use or continued use of the theatre, shall at once terminate and cease, and the Council may exclude the hirer and his servants and licencees therefrom and decline to give access thereto, and shall not be liable to restore or refund any rent paid in advance or otherwise for the use of the theatre.

(2) By signing the agreement form, the hirer shall indemnify and hold harmless the Council from and against any claim for an injunction, damages or otherwise and for costs, including costs between attorney and client, that may be made against it by reason of any infringement by the hirer and any agent, employee, booking agent or servant of the hirer whilst using the theatre, of the copyright in any form of any person or company and in the conduct (including external advertisement and broadcasting) of any performance, work or act therein.

(3) Where programmes of music or works to be performed are printed prior to a performance, two copies of such printed programmes shall be handed to the Director by the hirer at the conclusion of such performance together with a list in duplicate of the encores rendered. Where the printed programme has not been adhered to, the hirer shall make the relevant alteration, in writing, to such programme so as to show the actual music or work performed. Where no programme of music or works to be performed are printed, a complete list in duplicate of the music or works rendered shall be handed to the Director by the hirer at the conclusion of the performance. Such list shall show—

(a) titles or works performed;

ALGEMEEN.

Bepalings Betreffende Bioskoopvertonings.

26. Indien die skouburg vir 'n bioskoop-, tekenrolprent of kinematografiese vertoning gehuur word, moet die huurder sorg dat die bepalings van die verordeninge betreffende sodanige vertonings wat in die munisipaliteit van toepassing is, nagekom word.

Toestemming van Eienaar van die Outeursreg word Vereis vir Uitvoering of Vertoning van Enige Musikale of Ander Werk.

27.(1) Die verhuur van die skouburg ingevolge hierdie verordeninge word nie beskou as 'n verlening van enige toestemming van die Raad tot die uitvoering of vertoning van enige musikale of ander werk, insluitende plaat- of bandmusiek nie, sonder die toestemming van die eienaar van die outeursreg daarvan in enige vorm met inbegrip van die reg van uitvoering. Die huurder is verplig om die toestemming van enige sodanige eienaar te verkry in dié mate wat wettiglik vereis word en indien deur die Raad van hom verlang, moet hy op aanvraag tot voldoening van die Raad bewys lewer van die verlening van sodanige toestemming voor enige sodanige uitvoering of vertoning, en by ontstentenis van die lewering van sodanige bewys, is die Raad geregtig om, tensy sodanige werk onmiddellik op sy eis aan uitvoering of vertoning onttrek word, die bespreking van die aldusgehuurde skouburg terstond te kanselleer, en by skriftelike kennisgewing te dien effekte word die reg van die huurder op die gebruik of verdere gebruik van die skouburg onmiddellik beëindig en gestaak; en die Raad kan die huurder en sy bediendes en vergunninghouers daarvandaan uitsluit en weier om toegang daartoe te verleen en is voorts nie aanspreeklik vir die terugbetaling of vergoeding van enige huurgeld wat vir die gebruik van die skouburg vooruit of andersins betaal is nie.

(2) Deur ondertekening van die ooreenkomsvorm vrywaar die huurder die Raad en stel hy die Raad skadeloos vir en teen enige vordering vir 'n geregtelike bevel, vir skadevergoeding of andersins en vir koste, met inbegrip van koste tussen prokureur en kliënt, wat teen die Raad ingestel kan word weens enige oortreding deur die huurder en deur enige agent, werknemer, kaartjieagent of bediende van die huurder tydens die gebruik van die skouburg, waardeur afbreuk gedoen word aan die outeursreg in enige vorm, van enige persoon of maatskappy en in die hou van enige uitvoering, werk of handeling daarin (met inbegrip van buite-reklame en uitsending).

(3) Wanneer programme van musiek of van werke wat uitgevoer moet word voor 'n uitvoering gedruk word, moet twee eksemplare van sodanige gedrukte programme deur die huurder aan die end van sodanige uitvoering aan die Direkteur oorhandig word tesame met 'n lys, in duplo van die gelewerde ekstra nommers. Waar daar 'n afwyking van die gedrukte programme is, moet die huurder sodanige afwyking op sodanige programme skriftelik aanbring ten einde die werklike musiek of werke aan te dui wat uitgevoer word. Waar daar geen programme van musiek of werke wat uitgevoer moet word, gedruk word nie, moet 'n volledige lys van die gelewerde musiek of werke, in duplo, deur die huurder na afloop van die uitvoering aan die Direkteur oorhandig word. Sodanige lys moet aantoon—

(a) die titel van werke wat uitgevoer is;

(b) number of times performed;

(c) description;

(d) author;

(e) composer;

(f) arranger; and

(g) publisher.

Penalty Clause.

28. Notwithstanding the provisions of section 23, any person who contravenes any provision of these by-laws or commits any breach thereof or fails or neglects to comply with the provisions thereof, commits an offence and shall be liable on conviction to a fine not exceeding R100 and shall, in addition to the penalties imposed on conviction, compensate the Council for any expense incurred by the Council as a result of such contravention of any provision of these by-laws.

ANNEXURE A.

TARIFF OF CHARGES.

PART 1.

BASIC RENTAL.

1. *Performances, Presentations and Productions.*

(1) During the evening from 17h30, per performance:

(a) *Professional groups, bodies or persons:*

(i) Mondays to Thursdays: R80,00.

(ii) Fridays to Sundays: R90,00.

(b) Amateur, educational, religious or welfare societies or persons: R50,00.

(2) During the morning and afternoon, per performance:

(a) *Professional groups, bodies or persons:*

(i) Mondays to Thursdays: R40,00.

(ii) Fridays to Sundays: R50,00.

(b) Amateur, educational, religious or welfare societies or persons: R30,00.

(3) Per week, from Monday to Saturday:

(a) Professional groups, bodies or persons: R475,00.

(b) Amateur, educational, religious or welfare societies or persons: R275,00.

(4) In the case where an amateur group, local or otherwise, or any cultural or welfare societies purchases a professional presentation, production or performance, the rental and direct costs shall be determined on the professional group basis.

2. *Dress Rehearsals With or Without Setting of Stage, per Evening from 17h30, not Exceeding Six Hours.*

(1) Professional groups, bodies or persons: R25,00.

(2) Amateur, educational, religious or welfare societies or persons: R15,00.

(b) hoeveel keer dit uitgevoer is;

(c) 'n beskrywing daarvan;

(d) die outeur;

(e) die komponis;

(f) die verwerker; en

(g) die uitgewer.

Strafbepaling.

28. Ondanks die bepalings van artikel 23, begaan iemand wat enige bepaling van hierdie verordeninge oortree of dit skend of versuim of nalaat om uitvoering daaraan te gee, 'n misdryf en is by skuldigbevinding strafbaar met 'n boete van hoogstens R100 en moet, benewens die strawwe hom opgelê by skuldigbevinding, die Raad vergoed vir enige uitgawes deur die Raad aangegaan as gevolg van sodanige oortreding van enige bepaling van hierdie verordeninge.

BYLAE A.

TARIEF VAN GELDE.

DEEL 1.

BASIESE HUURGELD.

1. *Uitvoerings, Aanbiedings en Produksies.*

(1) Gedurende die aand vanaf 17h30, per aanbieding:

(a) *Professionele groepe, liggame of persone:*

(i) Maandae tot Donderdae: R80,00.

(ii) Vrydae tot Sondae: R90,00.

(b) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R50,00.

(2) Gedurende die oggend en middag, per aanbieding:

(a) *Professionele groepe, liggame of persone:*

(i) Maandae tot Donderdae: R40,00.

(ii) Vrydae tot Sondae: R50,00.

(b) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R30,00.

(3) Per week, vanaf Maandag tot Saterdag:

(a) Professionele groepe, liggame of persone: R475,00.

(b) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R275,00.

(4) In die geval waar 'n amateurgroep, plaaslike of andersins, of enige kulturele of liefdadigheidsorganisasie 'n professionele aanbieding, op- of uitvoering koop, word die huurgelde en direkte koste op die beroepsgroepbasis bereken.

2. *Kleedrepetisies met of Sonder Set van Verhoog, per Aand Vanaf 17h30, Ses Ure nie te Oorskry nie.*

(1) Professionele groepe, liggame of persone: R25,00.

(2) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R15,00.

(3) Sundays and Public Holidays: Normal tariff, plus R5.

(4) The tariff in terms of subitems (1) to (3) inclusive, shall include stage lighting, but not the use of the auditorium.

3. *Normal Rehearsals, Setting of Stage or Setting of Lighting.*

(1) *From 10h00 to 23h30:*

(a) Professional groups, bodies or persons: R15,00.

(b) Amateur, educational, religious or welfare societies or persons: R10,00.

(c) Sundays and Public Holidays: Double the normal tariff.

(2) Setting of stage and lighting before 10h00 and after 23h30, additional to the normal tariff, per hour: R5,00.

(3) The tariff in terms of subitems (1) and (2) *does not include* stage lighting or the use of the auditorium for rehearsals or setting of stage.

4. *Productions, Concerts or Performances of a Sacred Nature.*

Sundays after church services (free admission): R20,00.

5. *Fashion Displays and Similar Shows.*

(1) For commercial purposes, per display: R40,00.

(2) For religious or welfare purposes, per display: R20,00.

6. *Hire of Foyer for Exhibitions, per Day.*

(1) If no sales take place: R3,00.

(2) If sales take place: R3,00 plus 10% of the proceeds.

7. *Lunch Hour Concert, per Presentation.*

(1) Professional groups, bodies or persons: R15,00.

(2) Amateur, educational, religious or welfare societies or persons: R5,00.

8. *Foyer Presentations, per Presentation.*

(1) Professional groups, bodies or persons: R10,00.

(2) Amateur, educational, religious or welfare societies or persons: R5,00.

9. *Rehearsal Room, From Monday to Saturday.*

(1) Per day or part thereof: R4,00.

(2) Per week or part thereof: R8,00.

10. *Cast Party, After Performance.*

From 23h00 to 01h00, per hour: R10,00.

PART 2.

DIRECT COSTS.

1. *Levy on Box Office Income and Sale of Programmes.*

(1) Per ticket sold: 10c.

(2) Per programme sold: 2c.

(3) Sondae en Openbare Vakansiedae: Normale tarief, plus R5.

(4) Die tarief ingevolge subitems (1) tot en met (3), sluit verhoogbeligting in, maar nie die gebruik van die gehoorsaal nie.

3. *Normale Repetisies, Set van Verhoog of Set van Beligting.*

(1) *Vanaf 10h00 tot 23h30:*

(a) Professionele groepe, liggame of persone: R15,00.

(b) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R10,00.

(c) Sondae en Openbare Vakansiedae: Dubbel die normale tarief.

(2) Set van verhoog of beligting voor 10h00 en na 23h30, bykomend tot die normale tarief, per uur: R5,00.

(3) Die tarief ingevolge subitems (1) en (2) *sluit nie* verhoogbeligting of die gebruik van die gehoorsaal vir repetisies of set van verhoog *in nie.*

4. *Produksies, Konserte of Uitvoerings van 'n Gewyde Aard.*

Sondae na kerkdienste (gratis toegang): R20,00.

5. *Modevertonings en Soortgelyke Vertonings.*

(1) Vir kommersiële doeleindes, per vertoning: R40,00.

(2) Vir godsdienstige of welsynsdoeleindes, per vertoning: R20,00.

6. *Huur van Voorportaal vir Uitstallings, per Dag.*

(1) Indien geen verkope plaasvind nie: R3,00.

(2) Indien verkope plaasvind: R3,00, plus 10% van die opbrengs.

7. *Etensuurkonsert, per Aanbieding.*

(1) Professionele groepe, liggame of persone: R15,00.

(2) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R5,00.

8. *Voorportaalaanbiedings, per Aanbieding.*

(1) Professionele groepe, liggame of persone: R10,00.

(2) Amateur-, opvoedkundige, godsdienstige of welsynsverenigings of persone: R5,00.

9. *Repetisiekamer, vanaf Maandag tot Saterdag.*

(1) Per dag of gedeelte daarvan: R4,00.

(2) Per week of gedeelte daarvan: R8,00.

10. *Toneelgeselligheid na Afloop van Opvoering.*

Vanaf 23h00 tot 01h00, per uur: R10,00.

DEEL 2.

DIREKTE KOSTE.

1. *Heffing op Loketinkomste en Verkoop van Programme.*

(1) Per kaartjie verkoop: 10c.

(2) Per program verkoop: 2c.

2. *Services of Lighting Electrician.*

(1) Mondays to Fridays after 17h30, per electrician: Actual cost.

(2) Saturdays, Sundays and Public Holidays, per electrician: Actual cost.

3. *Services of Spotlight Operators.*

(1) Mondays to Fridays after 17h30, per electrician: Actual cost.

(2) Saturdays, Sundays and Public Holidays, per electrician: Actual cost.

4. *Services of Stage Assistants.*

(1) Mondays to Fridays after 17h30, per assistant: Actual cost.

(2) Saturdays, Sundays, and Public Holidays, per assistant: Actual cost.

5. *Grand Piano.*

Tuning of piano: Actual cost.

6. *Hairdressers.*

Actual cost.

7. *Dressers.*

Actual cost.

8. *Washing and Ironing.*

Actual cost.

PB. 2-4-2-94-36

Administrator's Notice 1570 19 October, 1977

WOLMARANSSTAD MUNICIPALITY: SANITARY AND REFUSE REMOVALS TARIFF.

The Administrator hereby, in terms of section 101 of the Local Government Ordinance, 1939, publishes the by-laws set forth hereinafter, which have been approved by him in terms of section 99 of the said Ordinance.

The Sanitary and Refuse Removals Tariff of the Wolmaransstad Municipality, as contemplated by section 19(a) of Chapter 1 under Part IV of the Public Health By-laws of the Council, published under Administrator's Notice 148, dated 21 February, 1951, as amended, shall be as follows:

SANITARY AND REFUSE REMOVALS TARIFF.

1. *Night-soil Removal.*

For the removal of night-soil or urine, twice weekly, per pail, per month or part thereof: R1,20.

2. *Refuse Removal.*

(1) For the removal of refuse from any premises, except as provided in subitem (2), twice weekly, per bin, per month or part thereof: R1,20.

2. *Dienste van Beligtingselektrisiën.*

(1) Maandae tot Vrydae na 17h30, per elektrisiën: Werklike koste.

(2) Saterdae, Sondae en Openbare Vakansiedae, per elektrisiën: Werklike koste.

3. *Dienste van Kol-ligoperateurs.*

(1) Maandae tot Vrydae na 17h30, per elektrisiën: Werklike koste.

(2) Saterdae, Sondae en Openbare Vakansiedae, per elektrisiën: Werklike koste.

4. *Dienste van Verhoogassistente.*

(1) Maandae tot Vrydae na 17h30, per elektrisiën: Werklike koste.

(2) Saterdae, Sondae en Openbare Vakansiedae, per assistent: Werklike koste.

5. *Vleuelklavier.*

Stem van klavier: Werklike koste.

6. *Haarkapsters.*

Werklike koste.

7. *Kleders.*

Werklike koste.

8. *Was en Stryk.*

Werklike koste.

PB. 2-4-2-94-36

Administrateurskennisgewing 1570 19 Oktober 1977

MUNISIPALITEIT WOLMARANSSTAD: SANITÊRE EN VULLISVERWYDERINGSTARIEF.

Die Administrateur publiseer hierby ingevolge artikel 101 van die Ordonnansie op Plaaslike Bestuur, 1939, die verordeninge hierna uiteengesit, wat deur hom ingevolge artikel 99 van genoemde Ordonnansie goedgekeur is.

Die Sanitêre en Vullisverwyderingstarief van die Munisipaliteit Wolmaransstad, soos beoog by artikel 19(a) van Hoofstuk 1 van Deel IV van die Publieke Gesondheidsverordeninge van die Raad, afgekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, is soos volg:

SANITÊRE EN VULLISVERWYDERINGSTARIEF.

1. *Nagvuilverwydering.*

Vir die verwydering van nagvuil of urine, twee keer per week, per emmer, per maand of gedeelte daarvan: R1,20.

2. *Vullisverwydering.*

(1) Vir die verwydering van vullis vanaf enige perseel, uitgesonderd soos in subitem (2) bepaal, twee keer per week, per blik, per maand of gedeelte daarvan: R1,20.

(2) For the removal of refuse from Coloured dwellings, once weekly, per bin, per month or part thereof: 60c.

(3) Bins for the removal of refuse in terms of subitems (1) and (2), shall be supplied by the Council and shall remain the property of the Council.

3. *Vacuum Tank Removal.*

(1) *Private Dwellings and Flats, except as provided in subitem (2), per month:*

(a) Once per month: R3.

(b) Twice per month: R3,75.

(c) Thrice per month: R4,75.

(d) Four times per month: R5,75.

(2) *Coloured dwellings, per month:* R2.

(3) *Any other Premises, per month:*

(a) Per kl or part thereof removed: 32c.

(b) Minimum charge: R2.

4. *Garden Refuse Removal.*

For the removal of refuse generated as a result of normal gardening activities such as cut grass, leaves, plants, flowers and any other similar small and light objects: Per load or part thereof: R5.

The Sanitary and Refuse Removals Tariff of the Wolmaransstad Municipality, published under Administrator's Notice 1022, dated 9 September, 1970, as amended, is hereby revoked.

PB. 2-4-2-81-40

(2) Vir die verwydering van vullis vanaf Kleurlingwonings, een keer per week, per blik, per maand of gedeelte daarvan: 60c.

(3) Blikke vir die verwydering van vullis ingevolge subitems (1) en (2), word deur die Raad verskaf en bly die eiendom van die Raad.

3. *Vakuumtenkverwydering.*

(1) *Private Wonings en Woonstelle, uitgesonderd soos in subitem (2) bepaal, per maand:*

(a) Een keer per maand: R3.

(b) Twee keer per maand: R3,75.

(c) Drie keer per maand: R4,75.

(d) Vier keer per maand: R5,75.

(2) *Kleurlingwonings, per maand:* R2.

(3) *Enige ander Perseel, per maand:*

(a) Per kl of gedeelte daarvan verwyder: 32c.

(b) Minimum vordering: R2.

4. *Tuinvullisverwydering.*

Vir die verwydering van vullis wat as gevolg van normale tuinboubedrywighede ontstaan soos gesynde gras, blare, plante, blomme en enige ander soortgelyke klein en ligte voorwerpe: Per vrag of gedeelte daarvan: R5.

Die Sanitêre en Vullisverwyderingstarief van die Munisipaliteit Wolmaransstad, afgekondig by Administrateurskennisgewing 1022 van 9 September 1970, soos gewysig, word hierby herroep.

PB. 2-4-2-81-40

Administrator's Notice 1571 19 October, 1977

DECLARATION OF APPROVED TOWNSHIP.

In terms of section 69 of the Town-planning and Townships Ordinance, 1965 (Ordinance 25 of 1965), the Administrator hereby declares Rant-en-dal Extension 2 Township to be an approved township subject to the conditions set out in the Schedule hereto.

PB. 4-2-2-4618

SCHEDULE.

CONDITIONS UNDER WHICH THE APPLICATION MADE BY HUGH TRAVERS TRACY UNDER THE PROVISIONS OF THE TOWN-PLANNING AND TOWNSHIPS ORDINANCE, 1965, FOR PERMISSION TO ESTABLISH A TOWNSHIP ON PORTION 270 OF THE FARM PAARDEPLAATS 177-I.Q., PROVINCE OF TRANSVAAL, HAS BEEN GRANTED.

1. CONDITIONS OF ESTABLISHMENT.

(1) *Name.*

The name of the township shall be Rant-en-dal Extension 2.

(2) *Design.*

The township shall consist of erven as indicated on General Plan S.G. A.6769/76.

Administrateurskennisgewing 1571 19 Oktober 1977

VERKLARING TOT GOEDGEKEURDE DORP.

Ingevolge artikel 69 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965 (Ordonnansie 25 van 1965), verklaar die Administrateur hierby die dorp Rant-en-dal Uitbreiding 2 tot 'n goedgekeurde dorp onderworpe aan die voorwaardes uiteengesit in die bygaande Bylae.

PB. 4-2-2-4618

BYLAE.

VOORWAARDES WAAROP DIE AANSOEK GEDOEN DEUR HUGH TRAVERS TRACY INGEVOLGE DIE BEPALINGS VAN DIE ORDONNANSIE OP DORPSBEPLANNING EN DORPE, 1965, OM TOESTEMMING OM 'N DORP TE STIG OP GEDEELTE 270 VAN DIE PLAAS PAARDEPLAATS 177-I.Q., PROVINSIE TRANSVAAL, TOEGESTAAN IS.

1. STIGTINGSVOORWAARDES.

(1) *Naam.*

Die naam van die dorp is Rant-en-dal Uitbreiding 2.

(2) *Ontwerp.*

Die dorp bestaan uit erwe soos aangedui op Algemene Plan L.G. A.6769/76.

(3) *Stormwater Drainage and Street Construction.*

(a) The township owner shall on request by the local authority submit to such authority for its approval, a detailed scheme complete with plans, sections and specifications, prepared by a civil engineer approved by the local authority, for the collection and disposal of stormwater throughout the township by means of properly constructed works and for the construction, tarmacadamising, kerbing and channelling of the streets therein together with the provision of such retaining walls as may be considered necessary by the local authority. Furthermore, the scheme shall indicate the route and gradient by which each erf gains access to the street on which it abuts.

(b) The township owner shall immediately after the scheme has been approved by the local authority carry out the scheme at his own expense on behalf and to the satisfaction of the local authority under the supervision of a civil engineer approved by the local authority.

(4) *Endowment.*

(a) Payable to the local authority:

The township owner shall in terms of the provisions of section 63(1) of the Town-planning and Townships Ordinance, 1965, pay to the local authority as endowment sums of money equal to

(i) 1% of the land value of erven in the township, which amount shall be used by the local authority for the acquisition of land for a depositing site;

(ii) 1% of the land value of erven in the township, which amount shall be used by the local authority for the acquisition of land for a cemetery.

Such endowment shall be paid in accordance with the provisions of section 74 of the said Ordinance.

(b) Payable to the Transvaal Education Department:

The township owner shall pay to the Transvaal Education Department, for educational purposes, an endowment on the land value of special residential erven in the township, the area of which shall be calculated by multiplying 48,08 m² by the number of special residential erven in the township.

The value of the land shall be determined in terms of the provisions of section 74(3) of the Town-planning and Townships Ordinance, 1965, and such endowment shall be payable in terms of the provisions of section 73 of the said Ordinance.

(5) *Disposal of Existing Conditions of Title.*

All erven shall be made subject to existing conditions and servitudes, if any, including the reservation of rights to minerals.

(6) *Demolition of Buildings.*

The township owner shall at his own expense cause all buildings situated within the building line reserves, side spaces or over common boundaries, as well as all buildings not in conformity with the local authority's statutory requirements to be demolished to the satisfaction of the local authority, when required by the local authority to do so.

(3) *Stormwaterdreinering en Straatbou.*

(a) Die dorpseienaar moet op versoek van die plaaslike bestuur aan sodanige bestuur 'n gedetailleerde skema volledig met planne, deursneë en spesifikasies, opgestel deur 'n siviele ingenieur wat deur die plaaslike bestuur goedgekeur is, vir die opgaar en afvoer van stormwater deur die hele dorp deur middel van behoorlik aangelegde werke en vir die aanlê, teermacadamisering, beranding en kanalisering van die strate daarin, tesame met die verskaffing van sodanige keermure as wat die plaaslike bestuur nodig ag, vir goedkeuring voorlê. Verder moet die skema die roete en helling aandui deur middel waarvan elke erf toegang tot die aangrensende straat verkry.

(b) Die dorpseienaar moet onmiddellik nadat die skema deur die plaaslike bestuur goedgekeur is die skema op eie koste namens en tot bevrediging van die plaaslike bestuur, onder toesig van 'n siviele ingenieur deur die plaaslike bestuur goedgekeur, uitvoer.

(4) *Begiftiging.*

(a) Betaalbaar aan die plaaslike bestuur:

Die dorpseienaar moet ingevolge die bepalings van artikel 63(1) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, as begiftiging aan die plaaslike bestuur bedrae geld betaal gelykstaande met

(i) 1% van die grondwaarde van erwe in die dorp, welke bedrag deur die plaaslike bestuur aangewend moet word vir die verkryging van grond vir 'n stortingsterrein;

(ii) 1% van die grondwaarde van erwe in die dorp, welke bedrag deur die plaaslike bestuur aangewend moet word vir die verkryging van grond vir 'n begraafplaas.

Sodanige begiftiging moet ooreenkomstig die bepalings van artikel 74 van genoemde Ordonnansie betaal word.

(b) Betaalbaar aan die Transvaalse Onderwysdepartement:

Die dorpseienaar moet aan die Transvaalse Onderwysdepartement 'n begiftiging vir onderwysdoeleindes betaal op die grondwaarde van spesiale woonerwe in die dorp, die grootte waarvan bereken word deur 48,08 m² te vermenigvuldig met die getal spesiale woonerwe in die dorp.

Die waarde van die grond word bepaal kragtens die bepalings van artikel 74(3) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, en sodanige begiftiging is betaalbaar kragtens die bepalings van artikel 73 van die genoemde Ordonnansie.

(5) *Beskikking oor Bestaande Titelvoorwaardes.*

Alle erwe moet onderworpe gemaak word aan bestaande voorwaardes en serwitute, as daar is, met inbegrip van die voorbehoud van die regte op minerale.

(6) *Sloping van Geboue.*

Die dorpseienaar moet op eie koste alle geboue geleë binne boulynreserwes, kantruimtes of oor gemeenskaplike grense, asook alle geboue wat nie in ooreenstemming met die plaaslike bestuur se statutêre vereistes is nie, laat sloop tot bevrediging van die plaaslike bestuur wanneer die plaaslike bestuur dit vereis.

(7) *Removal or Replacement of Municipal Services.*

If by reason of the establishment of the township it should become necessary to remove or replace any existing municipal services the cost thereof shall be borne by the township owner.

(8) *Enforcement of Conditions.*

The township owner shall observe the conditions of establishment and shall take the necessary steps to secure the enforcement of the conditions of title and any other conditions imposed in terms of section 62 of Ordinance 25 of 1965: Provided that the Administrator shall have the power to relieve the township owner of all or any of the obligations and to vest such obligations in any other person or corporate body.

2. CONDITIONS OF TITLE.

The erven mentioned hereunder shall be subject to the conditions indicated imposed by the Administrator under the provisions of the Town-planning and Townships Ordinance, 1965.

(1) *All Erven.*

(a) The erven is subject to a servitude, 2 m wide, in favour of the local authority, for sewerage and other municipal purposes, along any two boundaries other than a street boundary as determined by the local authority.

(b) No building or other structure shall be erected within the aforesaid servitude area and no large-rooted trees shall be planted within the area of such servitude or within 2 m thereof.

(c) The local authority shall be entitled to deposit temporarily on the land adjoining the aforesaid servitude such material as may be excavated by it during the course of the construction, maintenance or removal of such sewerage mains and other works as it in its discretion may deem necessary and shall further be entitled to reasonable access to the said land for the aforesaid purposes, subject to any damage done during the process of the construction, maintenance or removal of such sewerage mains and other works being made good by the local authority.

(2) *Erf 962.*

The erf is subject to a servitude for municipal purposes in favour of the local authority, as indicated on the general plan.

Administrator's Notice 1572 19 October, 1977

KRUGERSDORP AMENDMENT SCHEME 1/98.

The Administrator hereby, in terms of section 89(1) of the Town-planning and Townships Ordinance, 1965, declares that he has approved an amendment scheme, being an amendment of Krugersdorp Town-planning Scheme 1, 1946, comprising the same land as included in the township of Rant-en-dal Extension 2.

Map 3 and the scheme clauses of the amendment scheme are filed with the Dierctor of Local Govern-

(7) *Verwydering of Vervanging van Munisipale Dienste.*

Indien dit as gevolg van die stigting van die dorp nodig word om enige bestaande munisipale dienste te verskuif of te verander, moet die koste daarvan deur die dorpseienaar gedra word.

(8) *Nakoming van Voorwaardes.*

Die dorpseienaar moet die stigtingsvoorwaardes nakom en die nodige stappe doen om te sorg dat die titelvoorwaardes en enige ander voorwaardes opgelê kragtens artikel 62 van Ordonnansie 25 van 1965 nagekom word: Met dien verstande dat die Administrateur die bevoegdheid besit om die dorpseienaar van almal of enigeen van die verpligtings te onthef en om sodanige verpligtings by enige ander persoon of liggaam met regspersoonlikheid te laat berus.

2. TITELVOORWAARDES.

Die erwe hieronder genoem is onderworpe aan die voorwaardes soos aangedui opgelê deur die Administrateur kragtens die bepalings van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965:

(1) *Alle Erwe.*

(a) Die erf is onderworpe aan 'n serwituut, 2 m breed, vir riolerings- en ander munisipale doeleindes, ten gunste van die plaaslike bestuur, langs enige twee grense uitgesonderd 'n straatgrens, soos deur die plaaslike bestuur bepaal.

(b) Geen gebou of ander struktuur mag binne die voornoemde serwituutgebied opgerig word nie en geen grootwortelbome mag binne die gebied van sodanige serwituut of binne 'n afstand van 2 m daarvan geplant word nie.

(c) Die plaaslike bestuur is geregtig om enige materiaal wat deur hom uitgegrawe word tydens die aanleg, onderhoud of verwydering van sodanige rioolhoofpypleidings en ander werke as wat hy na goeddunke noodsaaklik ag tydelik te plaas op die grond wat aan die voornoemde serwituut grens en voorts is die plaaslike bestuur geregtig tot redelike toegang tot genoemde grond vir die voornoemde doel; onderworpe daaraan dat die plaaslike bestuur enige skade vergoed wat gedurende die aanleg, onderhoud of verwydering van sodanige rioolhoofpypleidings en ander werke veroorsaak word.

(2) *Erf 962.*

Die erf is onderworpe aan 'n serwituut vir munisipale doeleindes ten gunste van die plaaslike bestuur, soos op die algemene plan aangedui.

Administrateurskennisgewing 1572 19 Oktober 1977

KRUGERSDORP-WYSIGINGSKEMA 1/98.

Die Administrateur verklaar hierby ingevolge die bepalings van artikel 89(1) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, dat hy 'n wysigingskema synde 'n wysiging van Krugersdorp-dorpsaanlegskema 1, 1946, wat uit dieselfde grond as die dorp Rant-en-dal Uitbreiding 2 bestaan, goedgekeur het.

Kaart 3 en die skemaklousules van die wysigingskema word in bewaring gehou deur die Direkteur van Plaas-

ment, Pretoria and the Town Clerk, Krugersdorp and are open for inspection at all reasonable times.

This amendment is known as Krugersdorp Amendment Scheme 1/98.

PB. 4-9-2-18-98

Administrator's Notice 1573 19 October, 1977

ALBERTON AMENDMENT SCHEME 114.

The Administrator hereby, in terms of section 89(1) of the Town-planning and Townships Ordinance, 1965, declares that he has approved an amendment scheme, being an amendment of Alberton Town-planning Scheme 1, 1948, comprising the same land as included in the township of Alberton Extension 15.

Map 3 and the scheme clauses of the amendment scheme are filed with the Director of Local Government, Pretoria and the Town Clerk, Alberton and are open for inspection at all reasonable times.

This amendment is known as Alberton Amendment Scheme 114.

PB. 4-9-2-4-114

Administrator's Notice 1574 19 October, 1977

KEMPTON PARK AMENDMENT SCHEME 1/75.

It is hereby notified in terms of section 38 of the Town-planning and Townships Ordinance, 1965, that whereas an error occurred in Kempton Park Amendment Scheme 1/75, the Administrator has approved the correction of the scheme by the substitution of Map 3, Annexure to Map 3 and scheme clauses, with a new Map 3, Annexure to Map 3 and scheme clauses.

PB. 4-9-2-16-75

Administrator's Notice 1575 19 October, 1977

JOHANNESBURG AMENDMENT SCHEME 1/862.

It is hereby notified in terms of section 36(1) of the Town-planning and Townships Ordinance, 1965, that the Administrator has approved the Amendment of Johannesburg Town-planning Scheme 1, 1946, by the deletion in Annexure E.114 to Amendment Scheme 1/350, in respect of Lot 198, Rosebank Township, of —

(i) the words "Offices, professional suites," in the first paragraph under the heading Use Zone VII "Special", and

(ii) the words "Offices: 2 parking bays per 100 square metres gross floor area" and the words "Medical suites: 6 parking bays per 100 square metres" in condition (c) Parking.

Map 3 and the scheme clauses of the amendment scheme are filed with the Director of Local Government, Pretoria and the Town Clerk, Johannesburg (Room 715, Civic Centre, Braamfontein) and are open for inspection at all reasonable times.

This amendment is known as Johannesburg Amendment Scheme 1/862.

PB. 4-9-2-2-862

like Bestuur, Pretoria en die Stadsklerk, Krugersdorp en is beskikbaar vir inspeksie op alle redelike tye.

Hierdie wysiging staan bekend as Krugersdorp-wysigingskema 1/98.

PB. 4-9-2-18-98

Administrateurskennisgewing 1573 19 Oktober 1977

ALBERTON-WYSIGINGSKEMA 114.

Die Administrateur verklaar hierby ingevolge die bepalings van artikel 89(1) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, dat hy 'n wysigingskema synde 'n wysiging van Alberton-dorpsaanlegskema 1, 1948, wat uit dieselfde grond as die dorp Alberton Uitbreiding 15 bestaan, goedgekeur het.

Kaart 3 en die skemaklousules van die wysigingskema word in bewaring gehou deur die Direkteur van Plaaslike Bestuur, Pretoria en die Stadsklerk, Alberton en is beskikbaar vir inspeksie op alle redelike tye.

Hierdie wysiging staan bekend as Alberton-wysigingskema 114.

PB. 4-9-2-4-114

Administrateurskennisgewing 1574 19 Oktober 1977

KEMPTONPARK-WYSIGINGSKEMA 1/75.

Hierby word ooreenkomstig die bepalings van artikel 38 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, bekend gemaak dat, nademaal 'n fout in Kemptonpark-wysigingskema 1/75 ontstaan het, het die Administrateur goedgekeur dat die bogenoemde skema gewysig word deur Kaart 3, die Bylae tot Kaart 3 en die skemaklousules met 'n nuwe Kaart 3, Bylae tot Kaart 3 en skemaklousules te vervang.

PB. 4-9-2-16-75

Administrateurskennisgewing 1575 19 October, 1977

JOHANNESBURG-WYSIGINGSKEMA 1/862.

Hierby word ooreenkomstig die bepalings van artikel 36(1) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965 bekend gemaak dat die Administrateur goedgekeur het dat Johannesburg-dorpsaanlegskema 1, 1946, gewysig word deur die skrapping in Bylae E.114 tot Wysigingskema 1/350, met betrekking tot Lot 198, dorp Rosebank, van —

(i) die woorde "Kantore, kantore vir beroepslui" in die eerste paragraaf onder die opskrif Gebruikstreek VII "Spesiaal", en

(ii) die woorde "Kantore: 2 parkeerinhamme per 100 vierkante meter bruto vloeroppervlakte" en die woorde "Mediese kamers: 6 parkeerinhamme per 100 vierkante meter" in voorwaarde (c) Parkering.

Kaart 3 en die skemaklousules van die wysigingskema word in bewaring gehou deur die Direkteur van Plaaslike Bestuur, Pretoria en die Stadsklerk, Johannesburg (Kamer 715, Burgersentrum, Braamfontein) en is beskikbaar vir inspeksie op alle redelike tye.

Hierdie wysiging staan bekend as Johannesburg-wysigingskema 1/862.

PB. 4-9-2-2-862

Administrator's Notice 1576 19 October, 1977

WIDENING OF PROVINCIAL ROAD: DISTRICT OF LICHTENBURG.

In terms of the provisions of section 3 of the Roads Ordinance, 1957 (Ordinance 22 of 1957) the Administrator hereby increases the reserve width of Provincial Road P28-3 over the farm Treurfontein 73-I.P., district of Lichtenburg, to varying widths of 40 metres to 54 metres.

The general direction and situation of the said road as well as the extent of the increase of the reserve width thereof is shown on the subjoined sketch plan.

In terms of the provisions of subsections (2) and (3) of section 5A of the said Ordinance it is hereby declared that the land taken up by the increase of the reserve width of the said road has been demarcated by means of cairns.

E.C.R. 1500 dated 30 August, 1977
DP. 07-075-23/21/P28-3

Administrateurskennisgewing 1576 19 Oktober 1977

VERBREDING VAN PROVINSIALE PAD: DISTRIK LICHTENBURG.

Ingevolge die bepalings van artikel 3 van die Padordonnansie, 1957 (Ordonnansie 22 van 1957) vermeerder die Administrateur hierby die reserwebreedte van Provinsiale Pad P28-3 oor die plaas Treurfontein 73-I.P., distrik Lichtenburg, na afwisselende breedtes van 40 meter tot 54 meter.

Die algemene rigting en ligging van genoemde pad asook die omvang van die vermeerdering van die reserwebreedte daarvan word op bygaande sketsplan aangetoon.

Ooreenkomstig die bepalings van subartikels (2) en (3) van artikel 5A van genoemde Ordonnansie, word hierby verklaar dat die grond, wat die vermeerdering van die reserwebreedte van genoemde pad in beslag neem, met klipstapels afgemerk is.

U.K.B. 1500 gedateer 30 Augustus 1977
DP. 07-075-23/21/P28-3

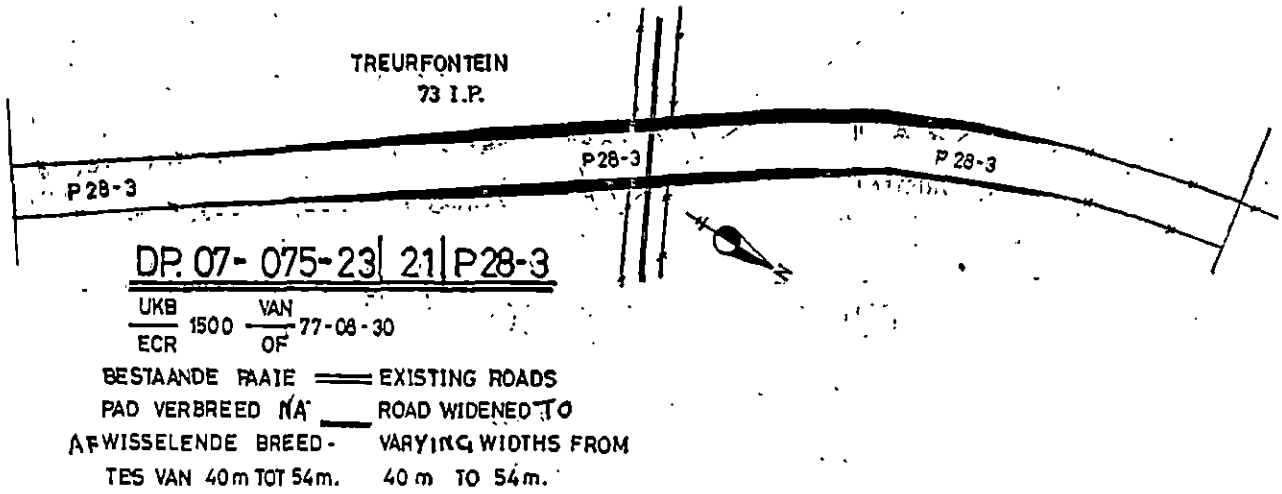

Administrator's Notice 1577 19 October, 1977

DECLARATION, DEVIATION AND WIDENING OF PUBLIC DISTRICT ROAD 2430 AND DECLARATION OF AN ACCESS ROAD: DISTRICTS OF DELAREYVILLE AND SCHWEIZER-RENEKE.

The Administrator:

(a) Hereby declares, in terms of the provisions of sections 5(1)(a) and 5(1)(c) of the Roads Ordinance, 1957 (Ordinance 22 of 1957) that the road, as shown on subjoined sketch plan (a) which runs over the farms Driekant 304-I.O., Zoutpan or Kopje Zyn Pan 221-I.O., Vaalkop 222-I.O., Schatryk 223-I.O., Rietpan 225-I.O., district of Delareyville and Poortje 248-I.O., district of Schweizer-Reneke, shall exist as Public District Road 2430;

(b) hereby deviates, in terms of the provisions of section 5(1)(d) and section 3 of the said Ordinance, the road as mentioned in paragraph (a) *supra* and increases the road reserve width thereof over the said farms to 25 metres, as shown on sketch plan (b);

Administrateurskennisgewing 1577 19 Oktober 1977

VERKLARING, VERLEGGING EN VERBREDING VAN OPENBARE DISTRIKSPAD 2430 EN VERKLARING VAN TOEGANGSPAD: DISTRIKTE DELAREYVILLE EN SCHWEIZER-RENEKE.

Die Administrateur:

(a) Verklaar hierby, ingevolge die bepalings van artikels 5(1)(a) en 5(1)(c) van die Padordonnansie, 1957 (Ordonnansie 22 van 1957) dat die pad, soos op bygaande sketsplan (a) aangetoon, wat oor die plase Driekant 204-I.O., Zoutpan of Kopje Zyn Pan 221-I.O., Vaalkop 222-I.O., Schatryk 223-I.O., Rietpan 225-I.O., distrik Delareyville en Poortje 248-I.O., distrik Schweizer-Reneke loop as Openbare Distrikspad 2430 sal bestaan;

(b) verlê hierby, ingevolge die bepalings van artikel 5(1)(d) en artikel 3 van genoemde Ordonnansie, die pad soos in paragraaf (a) *supra* genoem en vermeerder die reserwebreedte daarvan oor genoemde plase na 25 meter, soos op sketsplan (b) aangetoon;

(c) hereby declares, in terms of the provisions of section 5(1)(b) and section 3 of the said Ordinance that an unnumbered public road, 10 metres wide, shall exist over the farm Schatryk 223-I.O. as shown on subjoined sketch plan (c);

(d) hereby declares, in terms of the provisions of section 48(1)(a) of the said Ordinance that an access road, 10 metres wide, shall exist over the farm Schatryk 223-I.O. as shown on subjoined sketch plan (d).

The general direction and situation of the deviation and of the declared roads as well as the extent of the road reserves thereof are shown on the subjoined sketch plans.

In terms of the provisions of subsections (2) and (3) of section 5A of the said Ordinance it is hereby declared that cairns have been erected to demarcate the land taken up by the said public roads.

E.C.R. 246 dated 9 February, 1977
DP. 07-075D-23/17 (Sub 11)

(c) verklaar hierby, ingevolge die bepalings van artikel 5(1)(b) en artikel 3 van genoemde Ordonnansie dat 'n ongenommerde openbare pad, 10 meter breed, oor die plaas Schatryk 223-I.O., sal bestaan, soos op bygaande sketsplan (c) aangetoon;

(d) verklaar hierby, ingevolge die bepalings van artikel 48(1)(a) van genoemde Ordonnansie dat 'n toegangspad, 10 meter breed, oor die plaas Schatryk 223-I.O., sal bestaan, soos op bygaande sketsplan (d) aangetoon.

Die algemene rigting en ligging van die verlegging en van die verklaarde paaie asook die omvang van die reserwebreedtes daarvan word op bygaande sketsplanne aangetoon.

Ooreenkomstig die bepalings van subartikels (2) en (3) van artikel 5A van genoemde Ordonnansie word hierby verklaar dat die grond wat die genoemde paaie in beslag neem met klipstapels afgemerk is.

U.K.B. 246 gedateer 9 Februarie 1977
DP. 07-075D-23/71 (Sub 11)

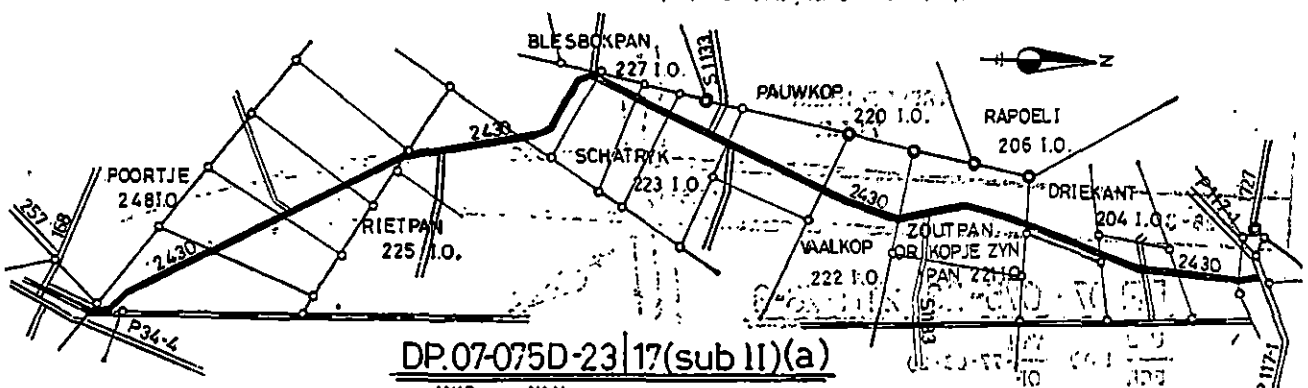

DP.07-075D-23/17(sub 11)(a)

UKB/ECR 246 VAN/OF 77-02-09

BESTAANDE PAAIE — EXISTING ROADS
PAD VERKLAAR AS OPENBARE PAD — ROAD DECLARED AS PUBLIC ROAD

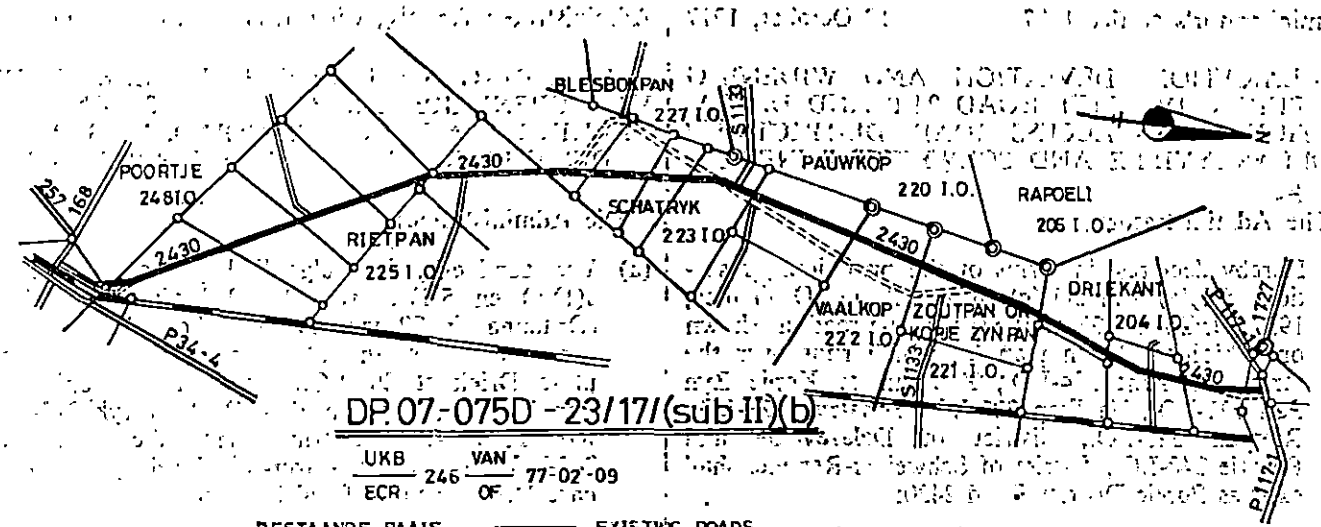

DP.07-075D-23/17/(sub 11)(b)

UKB/ECR 246 VAN/OF 77-02-09

BESTAANDE PAAIE — EXISTING ROADS
PAD GESLUIT — ROAD CLOSED
PAD VERLÊ EN VERBREED NA 25m. — ROAD DEVIATED AND WIDENED TO 25m.

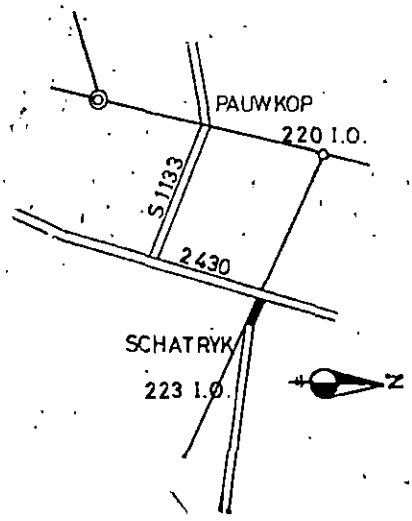

DP. 07-075D - 23 | 17(sub II)(c)

UKB/ECR 246 VAN/OF 77-02-09

BESTAANDE PAAIE — EXISTING ROADS
PAD VERKLAAR AS OPENBARE PAD 10 m BREED — ROAD DECLARED AS A PUBLIC ROAD 10 m WIDE

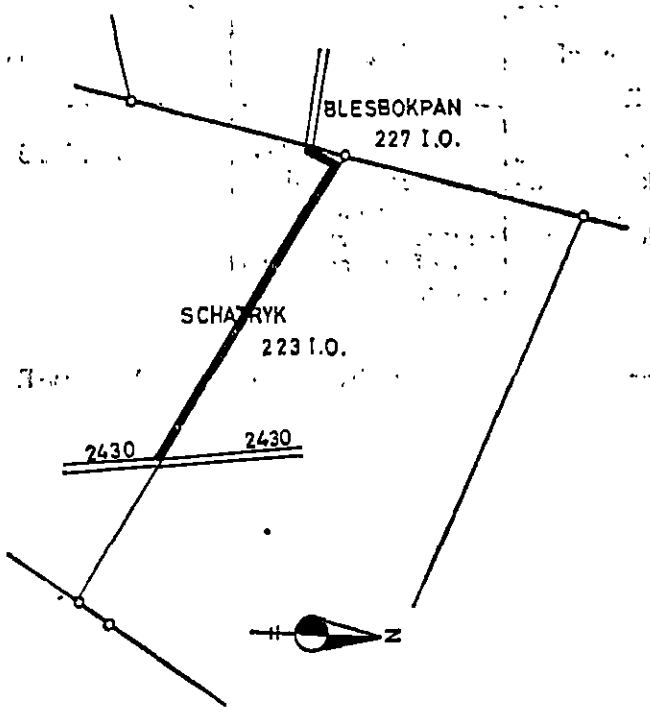

DP. 07-075D - 23 | 17(sub II)(d)

UKB/ECR 246 VAN/OF 77-02-09

BESTAANDE PAAIE — EXISTING ROADS
PAD VERKLAAR AS TOEGANGSPAD 10 m BREED — ROAD DECLARED AS ACCESS ROAD 10 m WIDE

Administrator's Notice 1578 — 19 October, 1977

APPOINTMENT OF MEMBER — ROAD BOARD, VENTERSDORP.

The Administrator is pleased to approve the appointment of Mr. J. L. Kruger as a member of the Road Board of Ventersdorp in terms of section 15(1) and (2) of the Roads Ordinance, 1957.

DP. 07-25/3/2
Approved on 13 September, 1977

Administrateurskennisgewing 1578 — 19 Oktober 1977

BENOEMING VAN LID — PADRAAD VAN VENTERSDORP.

Die Administrateur, ingevolge artikel 15(1) en (2) van die Padordonnansie, 1957 benoem mnr. J. L. Kruger tot lid van die Padraad van Ventersdorp.

DP. 07-25/3/2
Goedgekeur op 13 September 1977

GENERAL NOTICES

NOTICE 413 OF 1977.

PROPOSED ESTABLISHMENT OF TOWNSHIPS.

It is hereby notified in terms of section 58(8)(a) of the Town-planning and Townships Ordinance, 1965, that application has been made for permission to establish the townships mentioned in the accompanying Annexure.

The application together with the relevant plans, documents and information, is open for inspection at the office of the Director, Room B206A, 2nd Floor, Block B, Provincial Building, Pretorius Street, Pretoria, for a period of eight weeks from 12 October, 1977.

In terms of section 58(8)(a) of the said Ordinance any person who wishes to object to the granting of the application or who is desirous of being heard or of making representations in the matter, shall communicate in writing with the Director of Local Government. Such communication shall be received by the Director not later than eight weeks from the date of such first publication in the *Provincial Gazette*, that is 12 October, 1977.

All objections must be lodged in duplicate, and addressed to the Director of Local Government, Private Bag X437, Pretoria.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

ANNEXURE.

(a) Name of Township and (b) Owner(s)	Number of Erven	Description of Land	Situation	Reference Number
(a) Wilkoppies Extension 23 (b) P. J. Malan (Eiendoms) Beperk	General Residential : 8 Business : 1 Special : 1 Parks : 1	Holdings 14, 15 and 16 of Wilkoppies Agricultural Holdings, district Klerksdorp.	North of and abuts Holdings 11 and 13 of Wilkoppies Agricultural Holdings, east of and abuts Ian Street.	PB. 4-2-2-5536

All previous notices in connection with an application for permission to establish proposed Wilkoppies Extension 23 Township should be considered as cancelled.

ALGEMENE KENNISGEWINGS

KENNISGEWING 413 VAN 1977.

VOORGESTELDE STIGTING VAN DORPE.

Ingevolge artikel 58(8)(a) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, word hiermee bekend gemaak dat aansoek gedoen is om toestemming om die dorpe gemeld in meegaande Bylae te stig.

Die aansoek met die betrokke planne, dokumente en inligting lê ter insae by die kantoor van die Direkteur, Kamer B206A, 2de Vloer, Blok B, Provinsiale Gebou, Pretoriusstraat, Pretoria, vir 'n tydperk van agt weke vanaf 12 Oktober 1977.

Ingevolge artikel 58(8)(a) van die genoemde Ordonnansie, moet iedereen wat beswaar wil maak teen die toestaan van die aansoeke of wat begerig is om in die saak gehoor te word of vertoë te rig, die Direkteur skriftelik in kennis stel. Sodanige kennisgewing moet nie later nie as agt weke van die datum van sodanige eerste publikasie in die *Provinsiale Koerant* naamlik 12 Oktober 1977, deur die Direkteur van Plaaslike Bestuur ontvang word.

Alle besware moet in duplo ingedien word en gerig word aan die Direkteur van Plaaslike Bestuur, Privaatsak X437, Pretoria.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

BYLAE.

(a) Naam van Dorp en (b) Eienaar(s)	Aantal Erwe	Beskrywing van Grond	Ligging	Verwysingsnommer
(a) Wilkoppies Uitbreiding 23 (b) P. J. Malan (Eiendoms) Beperk	Algemene Woon : 8 Besigheid : 1 Spesiaal : 1 Parke : 1	Hoewes 14, 15 en 16 van Wilkoppies Landbouhoewes, distrik Klerksdorp.	Noord van en grens aan Hoewes 11 en 13 van Wilkoppies Landbouhoewes, oos van en grens aan Ianstraat.	PB. 4-2-2-5536

Alle vorige kennisgewings in verband met 'n aansoek om toestemming vir die stigting van die voorgestelde dorp Wilkoppies Uitbreiding 23 moet as gekanselleer beskou word.

NOTICE 414 OF 1977.

PROPOSED ESTABLISHMENT OF TOWNSHIPS.

It is hereby notified in terms of section 58(8)(a) of the Town-planning and Townships Ordinance, 1965, that application has been made for permission to establish the townships mentioned in the accompanying Annexure.

The application together with the relevant plans, documents and information, is open for inspection at the office of the Director, Room B206A, 2nd Floor, Block B, Provincial Building, Pretorius Street, Pretoria, for a period of eight weeks from 12 October, 1977.

In terms of section 58(8)(a) of the said Ordinance any person who wishes to object to the granting of the application or who is desirous of being heard or of making representations in the matter, shall communicate in writing with the Director of Local Government. Such communication shall be received by the Director not later than eight weeks from the date of such first publication in the *Provincial Gazette*, that is 12 October, 1977.

All objections must be lodged in duplicate, and addressed to the Director of Local Government, Private Bag X437, Pretoria.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

ANNEXURE.

(a) Name of Township and (b) Owner(s)	Number of Erven	Description of Land	Situation	Reference Number
(a) Paulshof Extension 14 (b) Tony van Oudheusden	General Residential : 1 Business : 2	Holding No. 1, Paulshof Agricultural Holdings Extension No. 3.	North of and abuts Witkoppen Road, east of and abuts Holding 26 of Paulshof Agricultural Holdings Extension No. 3.	PB. 4-2-2-5884
(a) Goedeburg Extension 2 (b) Elswade (Proprietary) Limited	Special Residential : 51 General Residential : 2 Parks : 2	Portion 11 (portion of Portion 1) of the farm Rietpan 66-I.R., district Benoni.	North-east of and abuts Venus Street, north-west of and abuts Portion 9 of the farm Rietpan 66-I.R., south-east of and abuts Brentwood Park Road.	PB. 4-2-2-5832

KENNISGEWING 414 VAN 1977.

VOORGESTELDE STIGTING VAN DORPE.

Ingevolge artikel 58(8)(a) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, word hiermee bekend gemaak dat aansoek gedoen is om toestemming om die dorpe gemeld in meegaande Bylae te stig.

Die aansoek met die betrokke planne, dokumente en inligting lê ter insae by die kantoor van die Direkteur, Kamer B206A, 2de Vloer, Blok B, Provinsiale Gebou, Pretoriusstraat, Pretoria, vir 'n tydperk van agt weke vanaf 12 Oktober 1977.

Ingevolge artikel 58(8)(a) van die genoemde Ordonnansie, moet iedereen wat beswaar wil maak teen die toestaan van die aansoeke of wat begerig is om in die saak gehoor te word of vertoë te rig, die Direkteur skriftelik in kennis stel. Sodanige kennisgewing moet nie later nie as agt weke van die datum van sodanige eerste publikasie in die *Provinsiale Koerant* naamlik 12 Oktober 1977, deur die Direkteur van Plaaslike Bestuur ontvang word.

Alle besware moet in duplo ingedien word en gerig word aan die Direkteur van Plaaslike Bestuur, Privaatsak X437, Pretoria.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

BYLAE.

(a) Naam van Dorp en (b) Eienaar(s)	Aantal Erwe	Beskrywing van Grond	Ligging	Verwysingsnommer
(a) Paulshof Uitbreiding 14 (b) Tony van Oudheusden	Algemene Woon : 1 Besigheid : 2	Hoewe No. 1, Paulshof Landbouhoewes Uitbreiding No. 3.	Noord van en grens aan Witkoppenweg, oos van en grens aan Hoewe 26, Paulshof Landbouhoewes Uitbreiding No. 3.	PB. 4-2-2-5884
(a) Goedeburg Uitbreiding 2 (b) Elswade (Proprietary) Limited	Spesiale Woon : 51 Algemene Woon : 2 Parke 2	Gedeelte 11 ('n gedeelte van Gedeelte 1) van die plaas Rietpan 66-I.R., distrik Benoni.	Noordoos van en grens aan Venusstraat, noordwes van en grens aan Gedeelte 9 van die plaas Rietpan 66-I.R., suidoos van en grens aan Brentwood Parkweg.	PB. 4-2-2-5832

NOTICE 416 OF 1977.

PROPOSED ESTABLISHMENT OF TOWNSHIPS.

It is hereby notified in terms of section 58(8)(a) of the Town-planning and Townships Ordinance, 1965, that application has been made for permission to establish the townships mentioned in the accompanying Annexure.

The applications together with the relevant plans, documents and information, is open for inspection at the office of the Director, Room B206A, 2nd Floor, Block B, Provincial Building, Pretorius Street, Pretoria, for a period of eight weeks from 19 October, 1977.

In terms of section 58(8)(a) of the said Ordinance any person who wishes to object to the granting of the applications or who is desirous of being heard or of making representations in the matter, shall communicate in writing with the Director of Local Government. Such communication shall be received by the Director not later than eight weeks from the date of such first publication in the *Provincial Gazette*, that is 19 October, 1977.

All objections must be lodged in duplicate, and addressed to the Director of Local Government, Private Bag X437, Pretoria.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

ANNEXURE.

(a) Name of Township and (b) Owner(s)	Number of Erven	Description of Land	Situation	Reference Number
(a) Towerby Extension 4 (b) A. R. Fyfe Armstrong Investments (Pty.) Limited	Special Residential : 1 Special (for flats detached or attached) : 1	Portion 79 (a portion of Portion 45) of the farm Turffontein 100-I.R., district of Johannesburg.	North of and abuts Rosettenville Extension 5, west of and abuts Rosettenville Extension 3.	PB. 4-2-2-4769
(a) Sabie Extension 9 South African Forest Investments Limited. (b) Acme Timber Industries Limited	Special Residential : 406 Business : 1 Church : 1 Garage : 1 Hotel : 1 Special (Escom) : 1 Parks : 11	(a) Portion of Remaining Extent of Portion 4. (b) Portion 95 (a portion) (a portion of portion). (c) Portion 101 all of the farm Grootfontein No. 96-J.I., district of Sabie.	North of and abuts Provincial Road P33-3, west of and abuts Sabie Railway Station.	PB. 4-2-2-5539

KENNISGEWING 416 VAN 1977.

VOORGESTELDE STIGTING VAN DORPE.

Ingevolge artikel 58(8)(a) van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, word hiermee bekend gemaak dat aansoek gedoen is om toestemming om die dorpe gemeld in meegaande Bylae te stig.

Die aansoeke met die betrokke planne, dokumente en inligting lê ter insae by die kantoor van die Direkteur, Kamer B206A, 2de Vloer, Blok B, Provinsiale Gebou, Pretoriusstraat, Pretoria, vir 'n tydperk van agt weke vanaf 19 Oktober 1977.

Ingevolge artikel 58(8)(a) van genoemde Ordonnansie, moet iedereen wat beswaar wil maak teen die toestaan van die aansoeke of wat begerig is om in die saak gehoor te word of vertoë te rig, die Direkteur skriftelik in kennis stel. Sodanige kennisgewing moet nie later nie as agt weke van die datum van sodanige eerste publikasie in die *Provinsiale Koerant* naamlik 19 Oktober 1977, deur die Direkteur van Plaaslike Bestuur ontvang word.

Alle besware moet in duplo ingedien word en gerig word aan die Direkteur van Plaaslike Bestuur, Privaatsak X437, Pretoria.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

BYLAE.

(a) Naam van Dorp en (b) Eienaar(s)	Aantal Erwe	Beskrywing van Grond	Ligging	Verwysingsnommer
(a) Towerby Uitbreiding 4 (b) A. R. Fyfe Armstrong Investments (Edms.) Beperk	Spesiale Woon : 1 Spesiaal (vir woonstelle aanmekaargeskakel of losstaande) : 1	Gedeelte 79 ('n gedeelte van Gedeelte 45) van die plaas Turffontein 100-I.R., distrik Johannesburg.	Noord van en grens aan Rosettenville Uitbreiding 5, wes van en grens aan Rosettenville Uitbreiding 3.	PB. 4-2-2-4769
(a) Sabie Uitbreiding 9 South African Forest Investments Beperk (b) Acme Timber Industries Beperk	Spesiale Woon : 406 Besigheid : 1 Kerk : 1 Garage : 1 Hotel : 1 Spesiaal (Evkom) : 1 Parke : 11	(a) 'n Gedeelte van die Resterende Gedeelte van Gedeelte 4. (b) Gedeelte 95 ('n gedeelte) ('n gedeelte van gedeelte). (c) Gedeelte 101 almal van die plaas Grootfontein No. 96-J.L., distrik Sabie.	Noord van en grens aan Provinsiale Pad P33-3, wes van en grens aan Sabie Spoorwegstasie.	PB. 4-2-2-5539

NOTICE 403 OF 1977.

BOOKMAKER'S LICENCE.

I, Anibal Manuel de Sousa Rodrigues, of 16 David Jones Street, Libradene, Boksburg, do hereby give notice that it is my intention to apply to the Transvaal Bookmaker's Licensing Committee for a certificate authorizing the issue of a bookmaker's licence in terms of Ordinance 26 of 1925.

Any person who wishes to object to the granting of such a certificate, or who wishes to lay before the Committee any fact or information in connection therewith, may do so in writing to the Secretary of the Transvaal Bookmaker's Licensing Committee, Private Bag X64, Pretoria, to reach him on or before 26 October, 1977. Every such person is required to state his full name, occupation and postal address.

KENNISGEWING 403 VAN 1977.

BEROEPSWEDDERSLISENSIE.

Ek, Anibal Manuel de Sousa Rodrigues, van David Jonesstraat 16, Libradene, Boksburg, gee hiermee kennis dat ek van voorneme is om by die Transvaalse Beroepswedderslisensiekomitee aansoek te doen om 'n sertifikaat waarby die uitreiking van 'n beroepswedderslisensie ingevolge Ordonnansie 26 van 1925 gemagtig word.

Iedereen wat beswaar wil maak teen die toestaan van so 'n sertifikaat of wat enige feit of inligting in verband daarmee aan die Komitee wil voorlê, kan dit skriftelik aan die Sekretaris van die Transvaalse Beroepswedderslisensiekomitee, Privaatsak X64, Pretoria, doen om hom voor of op 26 Oktober 1977 te bereik. Iedere sodanige persoon moet sy volle naam, beroep en posadres verstrek.

NOTICE 405 OF 1977.

NORTHERN JOHANNESBURG REGION AMENDMENT SCHEME 1019.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Portion Three of Lot Ten Athol (Proprietary) Limited, C/o Mr. N. B. Underwood Estate Agent, P.O. Box 65254, Benmore, for the amendment of Northern Johannesburg Region Town-planning Scheme, 1958 by rezoning Portion 3 of Lot 10, situated on Denoon Drive Atholl Township from "Special Residential" with a density of "One dwelling per 4 000 m²" to "Special Residential" with a density of "One dwelling per 2 000 m²".

The amendment will be known as Northern Johannesburg Region Amendment Scheme 1019. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Sandton and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 78001, Sandton at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-116-1019

KENNISGEWING 405 VAN 1977.

NOORDELIKE JOHANNESBURGSTREEK-WYSIGINGSKEMA 1019.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, Portion Three of Lot Ten Athol (Proprietary) Limited, P/a mnr. N. B. Underwood Estate Agent, Posbus 65254, Benmore, aansoek gedoen het om Noordelike Johannesburgstreek-dorpsaanlegskema 1958 te wysig deur die hersonering van Gedeelte 3 van Lot 10, geleë aan Denoonrylaan, dorp Atholl, van "Spesiale Woon" met 'n digtheid van "Een woonhuis per 4 000 m²" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 2 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Noordelike Johannesburgstreek-wysigingskema 1019 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Sandton ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 78001, Sandton skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-116-1019

NOTICE 406 OF 1977.

NORTHERN JOHANNESBURG REGION AMENDMENT SCHEME 1024.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner Mrs. D. L. Te Baerts, C/o Mr. W. Helmrich, P.O. Box 7, Johannesburg for the amendment of Northern Johannesburg Region Town-planning Scheme 1958 by rezoning Erf 846, situated on the corner of Main Road and Culross Road, Bryanston Township from "Special

KENNISGEWING 406 VAN 1977.

NOORDELIKE JOHANNESBURGSTREEK-WYSIGINGSKEMA 1024.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar mev. D. L. Te Baerts, P/a mnr. L. Helmrich, Posbus 7, Johannesburg, aansoek gedoen het om Noordelike Johannesburg-dorpsaanlegskema, 1958 te wysig deur die hersonering van Erf 846, geleë op die hoek van Mainweg en Culrossweg, dorp Bryanston van "Spesiale

Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 4 000 m²".

The amendment will be known as Northern Johannesburg Region Amendment Scheme 1024. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Sandton and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 78001, Sandton at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-116-1024

Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 4 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Noordelike Johannesburgstreek-wysigingskema 1024 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Sandton ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 78001, Sandton skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-116-1024

NOTICE 407 OF 1977.

JOHANNESBURG AMENDMENT SCHEME 1/1001.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner Mr. J. H. Lee, C/o Mr. Fred Fisher, P.O. Box 37038, Birnam Park, Johannesburg for the amendment of Johannesburg Town-planning Scheme 1, 1946 by rezoning Lot 172, situated on Rifle Range Road, Haddon Township from "General Residential" with a density of "One dwelling per 450 m²" to "Special" for general residential purposes, and with the consent of the Council, a horticultural nursery garden and purposes incidental thereto, subject to certain conditions.

The amendment will be known as Johannesburg Amendment Scheme 1/1001. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-2-1001

KENNISGEWING 407 VAN 1977.

JOHANNESBURG-WYSIGINGSKEMA 1/1001.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar mnr. J. H. Lee, P/a mnr. Fred Fisher, Posbus 37038, Birnampark, Johannesburg, aansoek gedoen het om Johannesburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Lot 172, geleë aan Rifle Rangeweg, dorp Haddon van "Algemene Woon" met 'n digtheid van "Een Woonhuis per 450 m²" tot "Spesiaal" vir algemene woondoeleindes en met die toestemming van die Raad, 'n kwekery en verwante doeleindes, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Johannesburg-wysigingskema 1/1001 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg, skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-2-1001

NOTICE 408 OF 1977.

RANDBURG AMENDMENT SCHEME 124.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. P. M. Bonette, 359 Kent Avenue, Ferndale, for the amendment of Randburg Town-planning Scheme 1976 by rezoning Erf 701 situated on Kent Avenue, Ferndale Township from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

KENNISGEWING 408 VAN 1977.

RANDBURG-WYSIGINGSKEMA 124.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. P. M. Bonette, Kentlaan 359, Ferndale, aansoek gedoen het om Randburg-dorpsbeplanningskema 1976 te wysig deur die hersonering van Erf 701, geleë aan Kentlaan, dorp Ferndale van "Residensieel 1" met 'n digtheid van "Een woonhuis per Erf" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 124. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-132H-124

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 124 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-132H-124

NOTICE 409 OF 1977.

RANDBURG AMENDMENT SCHEME 125.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mrs. J. Hartmann, P.O. Box 69907, Bryanston for the amendment of Randburg Town-planning Scheme, 1976 by rezoning Lot 239, situated on Pritchard Street, Johannesburg North Township from "Residential 1" with a density of "One dwelling per 1 250 m²" to "Residential 1" with a density of "One dwelling per 1 000 m²".

The amendment will be known as Randburg Amendment Scheme 125. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-132H-125

KENNISGEWING 409 VAN 1977.

RANDBURG-WYSIGINGSKEMA 125.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mev. J. Hartmann, Posbus 69907, Bryanston aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Lot 239, geleë aan Pritchardstraat, dorp Johannesburg-Noord van "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 250 m²" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 125 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-132H-125

NOTICE 410 OF 1977.

JOHANNESBURG AMENDMENT SCHEME 1/1005.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Avonwold House (Proprietary) Limited, C/o. Messrs. Rohrs, Nichol and De Swardt, P.O. Box 52035, Saxonwold for the amendment of Johannesburg Town-planning Scheme 1, 1946 by rezoning Remaining Extent of Lot 51, Rosebank Township, from "Special Residential" to "Special" for offices, a banking hall and building society and/or medical suites.

The amendment will be known as Johannesburg Amendment Scheme 1/1005. Further particulars of the Scheme are open for inspection at the office of the

KENNISGEWING 410 VAN 1977.

JOHANNESBURG-WYSIGINGSKEMA 1/1005.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Avonwold House (Proprietary) Limited, P/a. mnre. Rohrs, Nichol en De Swardt, Posbus 52035, Saxonwold aansoek gedoen het om Johannesburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Resterende Gedeelte van Lot 51, dorp Rosebank, van "Spesiale Woon" tot "Spesiaal" vir kantore, 'n banklokaal en bouvereniging en/of mediese spreekkamers.

Verdere besonderhede van hierdie wysigingskema (wat Johannesburg-wysigingskema 1/1005 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike

Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-2-1005

Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-2-1005

NOTICE 411 OF 1977.

PRETORIA AMENDMENT SCHEME 370.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, East End Properties (Eiendoms) Beperk, C/o. Messrs. Fehrsen and Douglas, P.O. Box 303, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 by rezoning Erf 740, situated between Kenmar-, Beval and Benedict Street, Constantia Park Extension 1 Township from "Special" to "Special Residential" with a density of "One dwelling per 1 000 m²".

The amendment will be known as Pretoria Amendment Scheme 370. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-3H-370

KENNISGEWING 411 VAN 1977.

PRETORIA-WYSIGINGSKEMA 370.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, East End Properties (Eiendoms) Beperk, P/a. mnre. Fehrsen en Douglas, Posbus 303, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema 1974 te wysig deur die hersonering van Erf 740, geleë aan Kenmar-, Beval- en Benedictstraat, dorp Constantia Park Uitbreiding 1 van "Spesiaal" na "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1.000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 370 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria, en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria, en die Stadsklerk, Posbus 440, Pretoria, skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-3H-370

NOTICE 412 OF 1977.

JOHANNESBURG AMENDMENT SCHEME 1/999.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Shell Oil South Africa (Proprietary) Limited, C/o. Messrs. Cedric S. Amoils and Mouton, P.O. Box 28816, Sandringham for the amendment of Johannesburg Town-planning Scheme 1, 1946 by rezoning Lot 20 and Consolidated Lot 19, situated on Louis Botha Avenue and Louis Road, Orchards Township, from "General Residential" with a density of "One dwelling per 1 500 m²" to "Special" use Zone VII for a Public Garage, subject to certain conditions.

The amendment will be known as Johannesburg Amendment Scheme 1/999. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

KENNISGEWING 412 VAN 1977.

JOHANNESBURG-WYSIGINGSKEMA 1/999.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Shell Oil South Africa (Proprietary) Limited, P/a. mnre. Cedric S. Amoils en Mouton, Posbus 28816, Sandringham aansoek gedoen het om Johannesburg-dorpsbeplanningskema 1, 1946 te wysig deur die hersonering van Lot 20 en Gekonsolideerde Lot 19, geleë aan Louis Bothalaan en Louisweg, dorp Orchards, van "Algemene Woon" met 'n digtheid van "Een woonhuis per 1 500 m²" tot "Spesiaal" Gebruikstreek VII vir 'n Publieke Garage, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Johannesburg-wysigingskema 1/999 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 12 October, 1977.

PB. 4-9-2-2-999

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 12 Oktober 1977.

PB. 4-9-2-2-999

NOTICE 417 OF 1977.

REMOVAL OF RESTRICTIONS ACT 84 OF 1967.

It is hereby notified in terms of section 3(6) of the above Act that the undermentioned applications have been received by the Director of Local Government and are open to inspection at Room B206A, Provincial Building, Pretorius Street, Pretoria and at the office of the relevant local authority. Any objections, with full reasons therefor, should be lodged in writing with the Director of Local Government, at the above address or Private Bag X437, Pretoria, on or before 16 November, 1977.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

Vivacor Ontwikkelings (Eiendoms) Beperk for:

(1) The amendment of the conditions of title of Erf 2735, Kempton Park Township, Registration Division I.R., Transvaal to permit the property to be used for "Special Business" of "Special" for garage purposes.

(2) The amendment of the Kempton Park Town-planning Scheme by the rezoning of Erf 2735, Kempton Park Township from "Special Business" to "Special" for garage purposes.

This amendment scheme will be known as Kempton Park Amendment Scheme 1/182.

PB. 4-14-2-665-22

The City Council of Johannesburg for the amendment of the conditions of title of Erf 157, Glenesk Township, district Johannesburg to permit the erf being used for the erection of a squash court complex, the hiring out thereof, and the selling of squash court equipment and ancillary matters.

PB. 4-14-2-536-1

KENNISGEWING 417 VAN 1977.

WET OP OPHEFFING VAN BEPERKINGS 84 VAN 1967.

Ingevolge artikel 3(6) van bostaande Wet word hiermee kennis gegee dat onderstaande aansoeke deur die Direkteur van Plaaslike Bestuur ontvang is en ter insae lê by Kamer B206A, Povinsiale Gebou, Pretoriusstraat, Pretoria, en in die kantoor van die betrokke plaaslike owerheid. Enige beswaar, met volledige redes daarvoor, moet skriftelik by die Direkteur van Plaaslike Bestuur, by bovermelde adres of Privaatsak X437, Pretoria, ingedien word op of voor 16 November 1977.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

Vivacor Ontwikkelings (Eiendoms) Beperk vir:

(1) Die wysiging van die titelvoorwaardes van Erf 2735, dorp Kemptonpark, Registrasie Afdeling I.R., Transvaal, ten einde die eiendom vir "Spesiale Besigheid" of "Spesiaal" vir garage doeleindes te gebruik.

(2) Die wysiging van die Kemptonpark-dorpsaanlegskema deur die hersonering van Erf 2735, dorp Kemptonpark van "Spesiale Besigheid" tot "Spesiaal" vir garage doeleindes.

Die wysigingskema sal bekend staan as Kemptonpark-wysigingskema 1/182.

PB. 4-14-2-665-22

Die Stadsraad van Johannesburg vir die wysiging van die titelvoorwaardes van Erf 157, dorp Glenesk, distrik Johannesburg ten einde dit moontlik te maak dat die erf vir die oprigting van 'n muurbalsentrum, die uitverhuur daarvan, en die verkoop van muurbal toerusting en verwante artikels gebruik kan word.

PB. 4-14-2-536-1

NOTICE 418 OF 1977.

JOHANNESBURG AMENDMENT SCHEME 1/1009.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. S. Chaskalson, C/o. Messrs. Van der Want, Nielson and Rostin, P.O. Box 3804, Johannesburg for the amendment of Johannesburg Town-planning Scheme 1, 1946 by rezoning Erf 69, situated on Third, Stella and Victoria Streets, Oaklands Township from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Johannesburg Amendment Scheme 1/1009. Further particulars of the

KENNISGEWING 418 VAN 1977.

JOHANNESBURG-WYSIGINGSKEMA 1/1009.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. S. Chaskalson, P/a mnre. Van der Want, Nielson en Rostin, Posbus 3804, Johannesburg aansoek gedoen het om Johannesburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Erf 69, geleë aan Third-, Stella- en Victoriastraat, dorp Oaklands van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Johannesburg-wysigingskema 1/1009 genoem sal word)

Scheme are open for inspection at the office of the Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-2-1009

NOTICE 419 OF 1977.

RANDBURG AMENDMENT SCHEME 127.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. T. H. Lotz, C/o. Messrs. H. P. van Hees en Smuts, P.O. Box 23, Krugersdorp for the amendment of Randburg Town-planning Scheme 1976 by rezoning Lot 1078, situated on the corner of Republic Road and Kent Avenue, Ferndale Township from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 127. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the ofice of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-127

NOTICE 420 OF 1977.

NORTHERN JOHANNESBURG REGION AMENDMENT SCHEME 1028.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Allison Land and Estates (Pty.) Ltd., C/o. Messrs. Swart, Olivier and Prinsen, P.O. Box 2405, Pretoria, for the amendment of Northern Johannesburg Region Town-planning Scheme, 1958, by rezoning Portion 6 of Lot 7 and the Remaining Extent of Lot 7, situated north of Maud Street and west of Main Road, Sandown Township from:

(a) Portion 6 of Lot 7 "Special Residential" with a density of "One dwelling per 4 000 m²";

(b) Remaining Extent of Lot 7: "General Residential 2";

lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-2-1009

KENNISGEWING 419 VAN 1977.

RANDBURG-WYSIGINGSKEMA 127.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. J. H. Lotz, P/a mnre. H. P. van Hees en Smuts, Posbus 23, Krugersdorp aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Lot 1078, geleë op die hoek van Republiekweg en Kentlaan, dorp Ferndale van "Residensieel 1" met 'n digtheid van "Een woonhuis per Erf" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 127 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-127

KENNISGEWING 420 VAN 1977.

NOORDELIKE JOHANNESBURGSTREEK-WYSIGINGSKEMA 1028.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Allison Land and Estates (Pty.) Ltd., P/a mnre. Swart, Olivier en Prinsen, Posbus 2405, Pretoria aansoek gedoen het om Noordelike Johannesburgstreek-dorpsaanlegskema, 1958 te wysig deur die hersonering van Gedeelte 6 van Lot 7 en die Restant van Lot 7, geleë noord van Maudstraat en wes van Mainweg, dorp Sandown van:

(a) Gedeelte 6 van Lot 7: "Spesiale Woon" met 'n digtheid van "Een woonhuis per 4 000 m²",

(b) Restant van Lot : "Algemene Woon 2", beide tot "Spesiaal" gebruikstreek VI vir kantore en professionele kamers, onderworpe aan sekere voorwaardes.

both to "Special" use Zone VI for purposes of offices and professional apartments subject to certain conditions.

The amendment will be known as Northern Johannesburg Region Amendment Scheme 1028. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Sandton and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 78001, Sandton at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-116-1028

Verdere besonderhede van hierdie wysigingskema (wat Noordelike Johannesburgstreek-wysigingskema 1028 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Sandton ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 78001, Sandton, skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-116-1028

NOTICE 421 OF 1977.

RANDBURG AMENDMENT SCHEME 126.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. G. Piazza-Musso, 42 Blairgowrie Drive, Blairgowrie, Randburg for the amendment of Randburg Town-planning Scheme 1, 1976 by rezoning Erf 940, situated on Surrey Avenue, Ferndale Township from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 126. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-126

KENNISGEWING 421 VAN 1977.

RANDBURG-WYSIGINGSKEMA 126.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. G. Piazza-Musso, Blairgowrierylaan, Blairgowrie, Randburg aansoek gedoen het om Randburg-dorpsbeplanningskema 1, 1976 te wysig deur die hersonering van Erf 940, geleë aan Surreylaan, dorp Ferndale van "Residensieel 1" met 'n digtheid van "Een woonhuis per Erf" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 126 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-126

NOTICE 422 OF 1977.

SOUTHERN JOHANNESBURG REGION AMENDMENT SCHEME 123.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. The Bottom Drawer (Proprietary) Limited, C/o. Mr. Fred Fisher, P.O. Box 37038, Birnam Park for the amendment of Southern Johannesburg Region Town-planning Scheme, 1962 by rezoning Lots 78, 79, 80, 88 and 89, situated on Fourth Avenue and Fifth Avenue, Armadale Township, from "Special Residential" with a density of "One dwelling per Erf" to "General Industrial", subject to certain conditions.

KENNISGEWING 422 VAN 1977.

SUIDELIKE JOHANNESBURGSTREEK-WYSIGINGSKEMA 123.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. The Bottom Drawer (Proprietary) Limited, P/a mnr. Fred Fisher, Posbus 37038, Birnam Park, aansoek gedoen het om Suidelike Johannesburgstreek-dorpsaanlegskema, 1962 te wysig deur die hersonering van Lotte 78, 79, 80, 88 en 89, geleë aan Vierdelaan en Vyfdelaan, dorp Armadale van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Algemene Nywerheid", onderworpe aan sekere voorwaardes.

The amendment will be known as Southern Johannesburg Region Amendment Scheme 123. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-213-123

Verdere besonderhede van hierdie wysigingskema (wat Suidelike Johannesburgstreek-wysigingskema 123 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-213-123

NOTICE 423 OF 1977.

RANDBURG AMENDMENT SCHEME 119.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mrs. O. Barker, P.O. Box 668, Randburg for the amendment of Randburg Town-planning Scheme 1976 by rezoning Lot 14, situated on the corner of Cork Avenue and North Street, Ferndale Township, from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 119. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-119

KENNISGEWING 423 VAN 1977.

RANDBURG-WYSIGINGSKEMA 119.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mev. O. Barker, Posbus 668, Randburg aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Lot 14 geleë op die hoek van Corklaan en Northstraat, dorp Ferndale van "Residensieel 1" met 'n digtheid van "Een woonhuis per Erf" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 119 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-119

NOTICE 424 OF 1977.

JOHANNESBURG AMENDMENT SCHEME 1/1002.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Seeff's Properties (Proprietary) Limited, C/o. Mr. Fred Fisher, P.O. Box 37038, Birnam Park, Johannesburg for the amendment of Johannesburg Town-planning Scheme 1, 1946 by rezoning Lot 12, situated on the corner of Booysens Reserve Road and Fraser Street, Booysens Township from "General Residential" Hight Zone 5 to "Special" to permit offices, show rooms and warehouses and with the concent of the Council a scrap yard and workshops.

The amendment will be known as Johannesburg Amendment Scheme 1/1002. Further particulars of the

KENNISGEWING 424 VAN 1977.

JOHANNESBURG-WYSIGINGSKEMA 1/1002.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Seeff's Properties (Proprietary) Limited, P/a mnr. Fred Fisher, Posbus 37038, Birnampark, Johannesburg aansoek gedoen het om Johannesburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Lot 12, geleë op die hoek van Booysens Reserveweg en Fraserstraat, dorp Booysens van "Algemene Woon", Hoogtestreek 5 tot "Spesiaal" ten einde kantore, vertoonlokale en pakhuise toe te laat en met die toestemming van die Raad, afvalwerf en werkswinkels.

Verdere besonderhede van hierdie wysigingskema (wat Johannesburg-wysigingskema 1/1002 genoem sal

Scheme are open for inspection at the office of the Town Clerk, Johannesburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 1049, Johannesburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-2-1002

word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Johannesburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 1049, Johannesburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-2-1002

NOTICE 425 OF 1977.

BOKSBURG AMENDMENT SCHEME 191.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Atlasville Township (Proprietary) Limited, C/o. Messrs. Fehrsen and Douglas, P.O. Box 303, Pretoria for the amendment of Boksburg Town-planning Scheme 1, 1946 by rezoning Erven 231, 236, 238 and 239, situated on Star Street, Melkweg Street, Maan Street and Pluto Street, Atlasville Township from (a) Erven 231, 238 and 239 "General Residential" and (b) Erf 236 "Special" for Hotel purposes, all to "Special Residential" with a density of "One dwelling per 1 000 m²".

The amendment will be known as Boksburg Amendment Scheme 191. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Boksburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 215, Boksburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-8-191

KENNISGEWING 425 VAN 1977.

BOKSBURG-WYSIGINGSKEMA 191.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Atlasville Township (Proprietary) Limited, P/a mnre. Fehrsen en Douglas, Posbus 303, Pretoria aansoek gedoen het om Boksburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Erwe 231, 236, 238 en 239, geleë aan Star-, Melkweg-, Maan- en Plutostraat, dorp Atlasville van (a) Erwe 231, 238 en 239 "Algemene Woon" en (b) Erf 236 "Spesiaal" vir Hoteldoeleindes, almal tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Boksburg-wysigingskema 191 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Boksburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 215, Boksburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-8-191

NOTICE 426 OF 1977.

KLERKSDORP AMENDMENT SCHEME 109.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Dr. J. G. M. Oosthuizen, C/o. Messrs. De Wet and Partners, P.O. Box 1504, Klerksdorp for the amendment of Klerksdorp Town-planning Scheme, 1974 by rezoning Erf 1596, situated on Irene Street, Klerksdorp Extension 8 Township from "Special Residential" with a density of "One dwelling per Erf" to "Special" for attached or detached residential units, subject to certain conditions.

The amendment will be known as Klerksdorp Amendment Scheme 109. Further particulars of the Scheme

KENNISGEWING 426 VAN 1977.

KLERKSDORP-WYSIGINGSKEMA 109.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, dr. J. G. M. Oosthuizen, P/a mnre. De Wet en Vennote, Posbus 1504, Klerksdorp aansoek gedoen het om Klerksdorp-dorpsaanlegskema, 1947 te wysig deur die hersonering van Erf 1596, geleë aan Irenestraat, dorp Klerksdorp Uitbreiding 8 van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiaal" vir aaneengeskakelde of losstaande wooneenhede, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Klerksdorp-wysigingskema 109 genoem sal word)

are open for inspection at the office of the Town Clerk, Klerksdorp and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 99 at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-17-109

NOTICE 427 OF 1977.

ERMELO AMENDMENT SCHEME 1/50.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Electricity Supply Commission, P.O. Box 1091, Johannesburg for the amendment of Ermelo Town-planning Scheme 1, 1954 by rezoning a Part of Portion 2 (Driehoek) of the farm Jan Hendriksfontein 263-I.T., situated on the corner of Kampong Road and Eike Avenue, Camden Township, from "Special Residential" to "Special" for a petrol filling station, subject to certain conditions.

The amendment will be known as Ermelo Amendment Scheme 1/50. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Ermelo and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 48, Ermelo at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-14-50

NOTICE 428 OF 1977.

EDENVALE AMENDMENT SCHEME 1/137.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. C. J. Pieterse, C/o. Messrs. Charl Viljoen and Partners, P.O. Box 4529, Pretoria for the amendment of Edenvale Town-planning Scheme 1, 1954 by rezoning Portion 2 of Lot 41, situated on the corner of Tenth Street and Eighth Avenue, Edenvale Township from "Special Residential" to

(a) the northern half: "General Business" Use Zone 111 and

(b) the southern half: "Special" Use Zone XVIII for Commercial Purposes including warehouses, subject to certain conditions.

lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Klerksdorp ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 99, Klerksdorp skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-17-109

KENNISGEWING 427 VAN 1977.

ERMELO-WYSIGINGSKEMA 1/50.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, Elektrisiteitsvoorsieningskommissie, Posbus 1091, Johannesburg aansoek gedoen het om Ermelo-dorpsaanlegskema 1, 1954 te wysig deur die hersonering van 'n gedeelte van Gedeelte 2 (Driehoek) van die plaas Jan Hendriksfontein 263-I.T. geleë op die hoek van Kampongweg en Eikelaan, dorp Camden van "Spesiale Woon" tot "Spesiaal" vir 'n petrolvulstasie, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Ermelo-wysigingskema 1/50 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Ermelo ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 48, Ermelo skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-14-50

KENNISGEWING 428 VAN 1977.

EDENVALE-WYSIGINGSKEMA 1/137.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. C. J. Pieterse, P/a mnre. Charl Viljoen en Vennote, Posbus 4529, Pretoria aansoek gedoen het om Edenvale-dorpsaanlegskema 1, 1954 te wysig deur die hersonering van Gedeelte 2 van Lot 41 geleë op die hoek van Tiendestraat en Agtstelaan, dorp Edenvale van "Spesiale Woon" tot

(a) die noordelike helfte: "Algemene Besigheid" Gebruikstreek 111 en

(b) die suidelike helfte: "Spesiaal" Gebruikstreek XVIII vir Kommersiële Doeleindes insluitende pakhuise, onderworpe aan sekere voorwaardes.

The amendment will be known as Edenvale Amendment Scheme 1/137. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Edenvale and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 25, Edenvale at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-13-137

Verdere besonderhede van hierdie wysigingskema (wat Edenvale-wysigingskema 1/137 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Edenvale ter insae.

Enige beswaar of vertoë teen die aansoek kan te enigen tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 25, Edenvale skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-13-137

NOTICE 429 OF 1977.

RANDBURG AMENDMENT SCHEME 131.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. J. W. Twine, P.O. Box 837, Randburg for the amendment of Randburg Town-planning Scheme, 1976, by rezoning Erf 89, situated on Remblok Street, Strijdompark Township from "Residential 1" with a density of "One dwelling per Erf" to "Industrial 1".

The amendment will be known as Randburg Amendment Scheme 131. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-131

KENNISGEWING 429 VAN 1977.

RANDBURG-WYSIGINGSKEMA 131.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. J. W. Twine, Posbus 837, Randburg aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Erf 89, geleë aan Remblokstraat, dorp Strijdompark Uitbreiding 2 van "Residensieel 1", met 'n digtheid van "Een woonhuis per Erf" tot "Nywerheid 1".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 131 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-131

NOTICE 430 OF 1977.

PRETORIA AMENDMENT SCHEME 397.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Trek-Petroleum (Proprietary) Limited, C/o. Mr. G. F. W. Ockert, P.O. Box 28257, Sunnyside, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 by rezoning Lot 507, situated on Fehrsen, Charles and William Street, Brooklyn Township from "Special Residential" with a density of "One dwelling per Erf" to "Special" for a public garage subject to certain conditions.

The amendment will be known as Pretoria Amendment Scheme 397. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of

KENNISGEWING 430 VAN 1977.

PRETORIA-WYSIGINGSKEMA 397.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, Trek-Petroleum (Proprietary) Limited, P/a mnr. G. F. W. Ockert, Posbus 28527, Sunnyside, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema, 1974 te wysig deur die hersonering van Lot 507 geleë van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiaal" vir 'n openbare garage, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 397 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pre-

Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-3H-397

NOTICE 431 OF 1977.

PRETORIA AMENDMENT SCHEME 396.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. W. P. L. Pienaar, C/o. Messrs. Haacke, Sher and Aab, P.O. Box 174, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 by rezoning Erf 159, situated on Fauna Road, Flaurana Township from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 1 000 m²".

The amendment will be known as Pretoria Amendment Scheme 396. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-3H-396

NOTICE 432 OF 1977.

RANDBURG AMENDMENT SCHEME 129.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. F. A. van der Hoek, 300 Surrey Avenue, Ferndale, Randburg for the amendment of Randburg Town-planning Scheme, 1976 by rezoning Lot 944, situated on Surrey Avenue, Ferndale Township from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 129. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag

toria en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 440, Pretoria skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-3H-397

KENNISGEWING 431 VAN 1977.

PRETORIA-WYSIGINGSKEMA 396.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. W. P. L. Pienaar, P/a mnre. Haacke, Sher en Aab, Posbus 174, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema, 1974 te wysig deur die hersonering van Erf 159, geleë aan Faunaweg, dorp Flaurana van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 396 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 440, Pretoria skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-3H-396

KENNISGEWING 432 VAN 1977.

RANDBURG-WYSIGINGSKEMA 129.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. F. A. van der Hoek, Surreyweg 300, Ferndale, Randburg aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Lot 944, geleë aan Surreyweg, dorp Ferndale van "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 129 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak

1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-129

NOTICE 433 OF 1977.

PRETORIA AMENDMENT SCHEME 375.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Curapest (Pty.) Limited, C/o. Messrs. Viljoen, Van Zyl, Gunning and Stead, P.O. Box 1889, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 by rezoning Erf 844, situated on Burger Street, Pretoria-North Township, from "Special Residential" to "General Business".

The amendment will be known as Pretoria Amendment Scheme 375. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria, at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-3H-375

NOTICE 434 OF 1977.

VANDERBIJLPARK AMENDMENT SCHEME 65.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. W. C. Duursema. C/o. Messrs. Rooth and Wessels, P.O. Box 21, Vanderbijlpark for the amendment of Vanderbijlpark Town-planning Scheme, 1961 by rezoning Erf 208, situated on the corner of Beethoven Street and Mozart Street, Vanderbijlpark South West 5 Township from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 2 000 m²".

The amendment will be known as Vanderbijlpark Amendment Scheme 65. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Vanderbijlpark and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 3, Vanderbijlpark at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-34-65

X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-129

KENNISGEWING 433 VAN 1977.

PRETORIA-WYSIGINGSKEMA 375.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Curapest (Edms.) Beperk, P/a mnre. Viljoen, Van Zyl, Gunning en Stead, Posbus 1889, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema, 1974 te wysig deur die hersonering van Erf 844, geleë aan Burgerstraat, dorp Pretoria-Noord, van "Spesiale Woon" tot "Algemene Besigheid".

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 375 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 440, Pretoria skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-3H-375

KENNISGEWING 434 VAN 1977.

VANDERBIJLPARK-WYSIGINGSKEMA 65.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. W. C. Duursema, P/a mnre. Rooth en Wessels, Posbus 21, Vanderbijlpark aansoek gedoen het om Vanderbijlpark-dorpsaanlegskema, 1961 te wysig deur die hersonering van Erf 208 geleë op die hoek van Beethoven- en Mozartstraat, dorp Vanderbijlpark Suidwes 5 van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 2 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Vanderbijlpark-wysigingskema 65 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Vanderbijlpark ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 3, Vanderbijlpark skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-34-65

NOTICE 435 OF 1977.

RANDBURG AMENDMENT SCHEME 113.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. S. P. Horsthemke, P.O. Box 50090, Randburg for the amendment of Randburg Town-planning Scheme, 1976 by rezoning Lot 603, situated on Vale Avenue, Ferndale Township. from "Residential 1" with a density of "One dwelling per Erf" to "Residential 1" with a density of "One dwelling per 1 500 m²".

The amendment will be known as Randburg Amendment Scheme 113. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Randburg and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, Private Bag 1, Randburg at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-132H-113

KENNISGEWING 435 VAN 1977.

RANDBURG-WYSIGINGSKEMA 113.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. S. P. Horsthemke, Posbus 50090, Randburg aansoek gedoen het om Randburg-dorpsbeplanningskema, 1976 te wysig deur die hersonering van Lot 603, geleë aan Valelaan, dorp Ferndale, van "Residensieel 1" met 'n digtheid van "Een woonhuis per Erf" tot "Residensieel 1" met 'n digtheid van "Een woonhuis per 1 500 m²".

Verdere besonderhede van hierdie wysigingskema (wat Randburg-wysigingskema 113 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Randburg ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Privaatsak 1, Randburg skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-132H-113

NOTICE 436 OF 1977.

SOUTHERN JOHANNESBURG REGION AMENDMENT SCHEME 125.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Prism Estates (Proprietary) Limited, C/o. Messrs. Swart, Olivier and Prinsen, P.O. Box 2405, Pretoria for the amendment of Southern Johannesburg Region Town-planning Scheme, 1962 by rezoning Erf 1925, situated on Coral Street and Garingboom Street, Mayberry Park Township from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 800 m²".

The amendment will be known as Southern Johannesburg Region Amendment Scheme 125. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Alberton and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 4, Alberton at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-213-125

KENNISGEWING 436 VAN 1977.

SUIDELIKE JOHANNESBURGSTREEK-WYSIGINGSKEMA 125.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Prism Estates (Proprietary) Limited, P/a mnre. Swart, Olivier en Prinsen, Posbus 2405, Pretoria aansoek gedoen het om Suidelike Johannesburgstreek-dorpsaanlegskema, 1962 te wysig deur die hersonering van Erf 1925, geleë aan Coralstraat en Garingboomstraat, dorp Mayberrypark van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 800 m²".

Verdere besonderhede van hierdie wysigingskema (wat Suidelike Johannesburgstreek-wysigingskema 125 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Alberton ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 4, Alberton skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-213-125

NOTICE 437 OF 1977.

ROODEPOORT-MARAISBURG AMENDMENT SCHEME 305.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Messrs. Floretha (Proprietary) Limited, C/o. Messrs. H. P. van Hees and Smuts, P.O. Box 23, Krugersdorp for the amendment of Roodepoort-Maraisburg Town-planning Scheme 1, 1946 by rezoning Erf 1069, situated on Shamrock Street Florida Extension Township from "Special Residential" with a density of "One dwelling per Erf" to "Special" Use Zone XII for the erection of a dwelling-house, provided that with the consent of the Council the erf may also be used for a place of worship, place of instruction, social hall, institution, special building and a tenement-house, subject to certain conditions.

The amendment will be known as Roodepoort-Maraisburg Amendment Scheme 305. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Roodepoort and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 217, Roodepoort at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-30-305

KENNISGEWING 437 VAN 1977

ROODEPOORT-MARAISBURG-WYSIGINGSKEMA 305.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnre. Floretha (Proprietary) Limited, P/a mnre. H. P. van Hees en Smuts, Posbus 23, Krugersdorp aansoek gedoen het om Roodepoort-Maraisburg-dorpsaanlegskema 1, 1946 te wysig deur die hersonering van Erf 1069, geleë aan Shamrockstraat, dorp Florida Uitbreiding van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiaal" Gebruikstreek XII, vir die oprigting van 'n woonhuis, met dien verstande dat, met die toestemming van die Stadsraad die erf ook vir 'n plek vir godsdiensoefening, onderrigplek, geselligheidsaal, 'n inrigting, spesiale geboue en 'n huurkamerwoning gebruik mag word, onderworpe aan sekere voorwaardes.

Verdere besonderhede van hierdie wysigingskema (wat Roodepoort-Maraisburg-wysigingskema 305 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die Stadsklerk van Roodepoort ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 217, Roodepoort skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-30-305

NOTICE 438 OF 1977.

PRETORIA AMENDMENT SCHEME 376.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mr. P. J. Theron, C/o. Messrs. Swart, Olivier and Prinsen, P.O. Box 2405, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 in order to provide that two dwelling-houses may exist on the northern part of Remaining Extent of Lot 1559, 4 000 m² in extent situated on Jack Hindon Street, Pretoria-North Township.

The amendment will be known as Pretoria Amendment Scheme 376. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-3H-376

KENNISGEWING 438 VAN 1977.

PRETORIA-WYSIGINGSKEMA 376.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mnr. P. J. Theron, P/a mnre. Swart, Olivier en Prinsen, Posbus 2405, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema, 1974 te wysig om voorsiening te maak dat twee woonhuise op die noordelike gedeelte van Resterende Gedeelte van Lot 1559, groot 4 000 m², geleë aan Jack Hindonstraat, dorp Pretoria-Noord mag bestaan.

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 376 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 440, Pretoria skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-3H-376

NOTICE 439 OF 1977.

PRETORIA AMENDMENT SCHEME 398.

It is hereby notified in terms of section 46 of the Town-planning and Townships Ordinance, 1965, (as amended) that application has been made by the owner, Mrs. Joyce Pienaar (neé Cuppleditch), C/o Messrs. Swart, Olivier and Prinsen, P.O. Box 2405, Pretoria for the amendment of Pretoria Town-planning Scheme, 1974 by rezoning Lot 152, situated on Fourth Street, Menlo Park Township from "Special Residential" with a density of "One dwelling per Erf" to "Special Residential" with a density of "One dwelling per 1 000 m²".

The amendment will be known as Pretoria Amendment Scheme 398. Further particulars of the Scheme are open for inspection at the office of the Town Clerk, Pretoria and at the office of the Director of Local Government, Room B206A, Provincial Building, Pretorius Street, Pretoria.

Any objection or representations in regard to the application shall be submitted to the Director of Local Government, in writing at the above address or Private Bag X437, Pretoria and the Town Clerk, P.O. Box 440, Pretoria at any time within a period of 4 weeks from the date of this notice.

E. UYS,
Director of Local Government.

Pretoria, 19 October, 1977.

PB. 4-9-2-3H-398

KENNISGEWING 439 VAN 1977.

PRETORIA-WYSIGINGSKEMA 398.

Hierby word ooreenkomstig die bepalings van artikel 46 van die Ordonnansie op Dorpsbeplanning en Dorpe, 1965, (soos gewysig) bekend gemaak dat die eienaar, mev. Joyce Pienaar (neé Cuppleditch), P/a mnre. Swart, Olivier en Prinsen, Posbus 2405, Pretoria aansoek gedoen het om Pretoria-dorpsbeplanningskema, 1974 te wysig deur die hersonering van Lot 152, geleë aan Vierdestraat, dorp Menlo Park van "Spesiale Woon" met 'n digtheid van "Een woonhuis per Erf" tot "Spesiale Woon" met 'n digtheid van "Een woonhuis per 1 000 m²".

Verdere besonderhede van hierdie wysigingskema (wat Pretoria-wysigingskema 398 genoem sal word) lê in die kantoor van die Direkteur van Plaaslike Bestuur, Kamer B206A, Provinsiale Gebou, Pretoriusstraat, Pretoria en in die kantoor van die Stadsklerk van Pretoria ter insae.

Enige beswaar of vertoë teen die aansoek kan te eniger tyd binne 'n tydperk van 4 weke vanaf die datum van hierdie kennisgewing aan die Direkteur van Plaaslike Bestuur by bovermelde adres of Privaatsak X437, Pretoria en die Stadsklerk, Posbus 440, Pretoria skriftelik voorgelê word.

E. UYS,
Direkteur van Plaaslike Bestuur.

Pretoria, 19 Oktober 1977.

PB. 4-9-2-3H-398

NOTICE 440 OF 1977.

APPLICATIONS TO ENTER INTO CONTRACT FOR CONVEYANCE OF SCHOOL CHILDREN.

Applications are hereby invited for the conveyance of school children as set out in the subjoined schedule.

Description	Number of Pupils	Tariff per School-day	Distance	School Board
Olympia Park-Brakpan	72	R38,21 (1977 model bus)	13,7 km	Springs

Applications must be submitted in duplicate on the prescribed forms T.E.D. 111(a), placed in sealed envelopes marked: "Conveyance of School Children" and also bear the description of service as stated in column one above: be addressed to the Secretary of the School Board concerned, and must be in his hands not later than eleven o'clock on the 25th day of November, 1977.

Full particulars as well as the necessary application forms T.E.D. 111(a) and contract forms T.E.D. 108A are obtainable from the Secretary of the School Board, Springs.

The Transvaal Education Department does not bind itself to accept any application, nor will it assign any reason for the rejection of any application.

KENNISGEWING 440 VAN 1977.

AANSOEK OM SLUITING VAN KONTRAK VIR DIE VERVOER VAN SKOOLKINDERS.

Aansoeke word gevra vir die vervoer van skoolkinders soos in die onderstaande skedule uiteengesit.

Beskrywing	Getal leerlinge	Tarief per Skoodag	Afstand	Skoolraad
Olympia Park-Brakpan	72	R38,21 (1977 model bus)	13,7 km	Springs

Aansoeke moet op die voorgeskrewe vorms T.O.D. 111(a) in duplikaat, gedoen en in verseëlde koeverte geplaas word met die woord "Aansoek: Vervoer van Skoolkinders" asook die beskrywing van die diens soos vermeld in kolom een hierbo daarop. Aansoeke moet aan die Sekretaris van die betrokke Skoolraad gerig word en moet hom nie later as elfuur op die 25ste dag van November 1977 bereik nie.

Volle besonderhede sowel as die nodige aansoekvorms T.O.D. 111(a) en kontrakvorms T.O.D. 108A is by die Skoolraadsekretaris Springs verkrygbaar.

Die Transvaalse Onderwysdepartement verbind hom nie om enige aansoek aan te neem nie of enige rede vir die afwysing van 'n aansoek te verstrek nie.

NOTICE 441 OF 1977.

APPLICATIONS TO ENTER INTO CONTRACT FOR CONVEYANCE OF SCHOOL CHILDREN.

Applications are hereby invited for the conveyance of school children as set out in the subjoined schedule.

Description	Number of Pupils	Tariff per School-day	Distance	School Board
Rotunda Park-Alberton	106	R38,97 (1977 model bus)	21,5 km	Suid-Rand

Applications must be submitted in duplicate on the *prescribed forms T.E.D. 111(a), placed in sealed envelopes* marked: "Conveyance of School Children" and also bear the description of service as stated in column one above: be addressed to the Secretary of the School Board concerned, and must be in his hands not later than eleven o'clock on the 25th day of November, 1977.

Full particulars as well as the necessary application forms T.E.D. 111(a) and contract forms T.E.D. 108A are obtainable from the Secretary of the School Board, Suid-Rand.

The Transvaal Education Department does not bind itself to accept any application, nor will it assign any reason for the rejection of any application.

KENNISGEWING 441 VAN 1977.

AANSOEK OM SLUITING VAN KONTRAK VIR DIE VERVOER VAN SKOOLKINDERS.

Aansoeke word gevra vir die vervoer van skoolkinders soos in die onderstaande skedule uiteengesit.

Beskrywing	Getal leerlinge	Tarief per Skooldag	Afstand	Skoolraad
Rotunda Park-Alberton	106	R38,97 (1977 model bus)	21,5 km	Suid-Rand

Aansoeke moet op die voorgeskrewe vorms T.O.D. *111(a) in duplikaat, gedoen en in verseëlde koeverte* geplaas word met die woord "Aansoek: Vervoer van Skoolkinders" asook die beskrywing van die diens soos vermeld in kolom een hierbo daarop. Aansoeke moet aan die Sekretaris van die betrokke Skoolraad gerig word en moet hom nie later as elfuur op die 25ste dag van November 1977 bereik nie.

Volle besonderhede sowel as die nodige aansoekvorms T.O.D. 111(a) en kontrakvorms T.O.D. 108A is by die Skoolraadsekretaris Suid-Rand verkrygbaar.

Die Transvaalse Onderwysdepartement verbind hom nie om enige aansoek aan te neem nie of enige rede vir die afwysing van 'n aansoek te verstrek nie.

NOTICE 442 OF 1977.

APPLICATIONS TO ENTER INTO CONTRACT FOR CONVEYANCE OF SCHOOL CHILDREN.

Applications are hereby invited for the conveyance of school children as set out in the subjoined schedule.

Description	Number of Pupils	Tariff per School-day	Distance	School Board
Olympia Park-Dalview	56	R35,50 (1977 model bus)	19,8 km	Springs

Applications must be submitted in duplicate on the prescribed forms T.E.D. *111(a), placed in sealed envelopes* marked: "Conveyance of School Children" and also bear the description of service as stated in column one above: be addressed to the Secretary of the School Board concerned, and must be in his hands not later than eleven o'clock on the 25th day of November, 1977.

Full particulars as well as the necessary application forms T.E.D. 111(a) and contract forms T.E.D. 108A are obtainable from the Secretary of the School Board, Springs.

The Transvaal Education Department does not bind itself to accept any application, nor will it assign any reason for the rejection of any application.

KENNISGEWING 442 VAN 1977.

AANSOEK OM SLUITING VAN KONTRAK VIR DIE VERVOER VAN SKOOLKINDERS.

Aansoeke word gevra vir die vervoer van skoolkinders soos in die onderstaande skedule uiteengesit.

Beskrywing	Getal leerlinge	Tarief per Skooldag	Afstand	Skoolraad
Olympia Park-Dalview	56	R35,50 (1977 model bus)	19,8 km	Springs

Aansoeke moet op die voorgeskrewe vorms T.O.D. *111(a) in duplikaat, gedoen en in verseëlde koeverte* geplaas word met die woord "Aansoek: Vervoer van Skoolkinders" asook die beskrywing van die diens soos vermeld in kolom een hierbo daarop. Aansoeke moet aan die Sekretaris van die betrokke Skoolraad gerig word en moet hom nie later as elfuur op die 25ste dag van November 1977 bereik nie.

Volle besonderhede sowel as die nodige aansoekvorms T.O.D. 111(a) en kontrakvorms T.O.D. 108A is by die Skoolraadsekretaris Springs verkrygbaar.

Die Transvaalse Onderwysdepartement verbind hom nie om enige aansoek aan te neem nie of enige rede vir die afwysing van 'n aansoek te verstrek nie.

NOTICE 443 OF 1977.

APPLICATIONS TO ENTER INTO CONTRACT FOR CONVEYANCE OF SCHOOL CHILDREN.

Applications are hereby invited for the conveyance of school children as set out in the subjoined schedule.

Description	Number of Pupils	Tariff per School-day	Distance	School Board
Germiston-Vlakplaas	70	R49,68 (1977 model bus)	41,8 km	Germiston

Applications must be submitted in duplicate on the prescribed forms T.E.D. 111(a), placed in sealed envelopes marked: "Conveyance of School Children" and also bear the description of service as stated in column one above: be addressed to the Secretary of the School Board concerned, and must be in his hands not later than eleven o'clock on the 25th day of November, 1977.

Full particulars as well as the necessary application forms T.E.D. 111(a) and contract forms T.E.D. 108A are obtainable from the Secretary of the School Board, Germiston.

The Transvaal Education Department does not bind itself to accept any application, nor will it assign any reason for the rejection of any application.

KENNISGEWING 443 VAN 1977.

AANSOEK OM SLUITING VAN KONTRAK VIR DIE VERVOER VAN SKOOLKINDERS.

Aansoeke word gevra vir die vervoer van skoolkinders soos in die onderstaande skedule uiteengesit.

Beskrywing	Getal leerlinge	Tarief per Skool-dag	Afstand	Skoolraad
Germiston-Vlakplaas	70	R49,68 (1977 model bus)	41,8 km	Germiston

Aansoeke moet op die voorgeskrewe vorms T.O.D. 111(a) in duplikaat, gedoen en in verseëlde koeverte geplaas word met die woord "Aansoek: Vervoer van Skoolkinders" asook die beskrywing van die diens soos vermeld in kolom een hierbo daarop. Aansoeke moet aan die Sekretaris van die betrokke Skoolraad gerig word en moet hom nie later as elfuur op die 25ste dag van November 1977 bereik nie.

Volle besonderhede sowel as die nodige aansoekvorms T.O.D. 111(a) en kontrakvorms T.O.D. 108A is by die Skoolraadsekretaris Germiston verkrygbaar.

Die Transvaalse Onderwysdepartement verbind hom nie om enige aansoek aan te neem nie of enige rede vir die afwysing van 'n aansoek te verstrek nie.

NOTICE 444 OF 1977.

Case No. 11376/77
PH 29

IN THE SUPREME COURT OF SOUTH AFRICA (WITWATERSRAND LOCAL DIVISION)

JOHANNESBURG, THE 13th DAY OF SEPTEMBER, 1977 BEFORE THE HONOURABLE MR. JUSTICE BOSHOFF A. J. P.

In the matter of: —

AUTOMOTIVE & GIRLING PROPERTIES (PROPRIETARY) LIMITED

Applicant —

Having heard Counsel for the Applicant and having read the documents filed of record:

IT IS ORDERED:

1. THAT a Rule *Nisi* do issue calling upon all persons concerned to appear and to show cause, if any, to this Court on the 25th day of October, 1977 at 10h00 why an Order should not be granted:

1.1 AUTHORISING and directing the Rand Townships Registrar to substitute for condition (j) of the certificate of consolidated title No. 1820/1961 dated 15 May, 1961 the following condition:

"Buildings, including outbuildings, hereafter erected on the erf should be located not less than 4,5 metres from the western boundary of the erf and not less than 7,62 metres from any other street boundary."

KENNISGEWING 444 VAN 1977.

Saak No. 11376/1977
PH 29

IN DIE HOOGGEREGSHOF VAN SUID-AFRIKA (WITWATERSRAND PLAASLIKE AFDELING)

JOHANNESBURG, DIE 13de DAG VAN SEPTEMBER 1977 VOOR SY EDELE REGTER BOSHOFF, WND. R. P.

In die saak van: —

AUTOMOTIVE & GIRLING PROPERTIES (EDMS.) BPK.

Aansoeker —

Na aanhoor van die Advokaat namens die Aansoeker, en na deurlees van die kennisgewing van mosie en die ander dokumente geliasseer:

BEVEEL DIE HOF:

1. DAT 'n Bevel *Nisi* uitgereik word wat alle belanghebbende persone oproep om op die 25ste dag van Oktober 1977 om 10h00 voor hierdie Hof te verskyn en redes, indien enige, aan te voer, waarom 'n bevel nie toegestaan moet word nie:

1.1 OM die Registrateur van Randdorpgebiede te magtig en te gelas om voorwaarde (j) van die Sertifikaat van Konsolideerde Titel No. 1820/1961, gedateer 15 Mei 1961 te vervang met die volgende voorwaarde:

"Geen geboue of buitegeboue mag op die erf opgerig word nader as 4,5 meter van die westelike grens van die erf en 7,62 meter vanaf enige ander straatgrens nie."

2. THAT service of the Rule *Nisi* be effected in the following manner:

2.1 By publication in one issue of "The Star" and one issue of "Die Vaderland" being daily newspapers in the English and Afrikaans languages respectively and in one issue of *"The Transvaal Provincial Gazette"*.

2.2 By posting copies of the Rule *Nisi* per prepaid registered post to each stand owner in the Township of Isando Extension No. 1, whose names appear in the Rating Records of the Town Council of Kempton Park and the addresses appearing in such records.

BOWMAN GILFILLAN & BLACKLOCK.

By the Court,

D. F. JOUBERT,
Asst. Registrar.

2. DAT bediening van die Bevel *Nisi* uitgevoer word op die volgende wyse:

2.1 Deur publikasie in een uitgawe van "The Star" en een uitgawe van "Die Vaderland" synde daaglikse koerante in die Engelse en Afrikaanse tale respektiewelik en in een uitgawe van *"Die Transvaalse Provinsiale Koerant"*.

2.2 Deur afskrifte van die Bevel *Nisi* per vooruitbetaalde registreerde pos te stuur na elke standplaaseienaar in die dorpsgebied van Isando Uitbreiding No. 1, wie se name en adresse in die Belastingrekords van die Stadsraad van Kemptonpark verskyn.

BOWMAN GILFILLAN & BLACKLOCK.

Deur die Hof,

D. F. Joubert,
Asst. Registrateur.

TENDERS

N.B. — Tenders previously published and where the closing dates have *not* yet passed, have *not* been *repeated* in this notice. Tenders are normally published 3-5 weeks before the closing date.

TENDERS

L.W. — Tenders wat voorheen gepubliseer is en waarvan die *sluitingsdatum nog nie verstreke is nie*, word nie in hierdie kennisgewing herhaal nie. Tenders word normaalweg 3-5 weke voor die sluitingsdatum gepubliseer.

TRANSVAAL PROVINCIAL ADMINISTRATION.

TENDERS.

Tenders are invited for the following services / supplies / sales. (Unless otherwise indicated in the description tenders are for supplies):—

TRANSVAALSE PROVINSIALE ADMINISTRASIE.

TENDERS.

Tenders vir die volgende dienste / voorrade / verkope word ingewag. (Tensy dit in die uiteensetting anders aangegee word, word tenders vir voorrade bedoel):—

Tender No.		Description of Service / Beskrywing van Diens	Closing Date / Sluitingsdatum
W.F.T.B.	269/77	Alberton Primary School: Renovation/Opknapping	11/11/1977
W.F.T.B.	270/77	H. F. Verwoerd Hospital: Alterations to neuro-surgical section/H. F. Verwoerd-hospitaal: Veranderings aan neuro-chirurgiese afdeling. Item 2071/74	25/11/1977
W.F.T.B.	271/77	H. F. Verwoerd Hospital: Erection of accommodation for a linear accelerator/H. F. Verwoerd-hospitaal: Oprigting van akkommodasie vir 'n lineêre versneller. Item 2067/74	25/11/1977
W.F.T.B.	272/77	Northcliff Second High School: Erection/Oprigting. Item 1050/73	25/11/1977
W.F.T.B.	273/77	Laerskool Suidheuwels: Renovation/Opknapping	11/11/1977
W.F.T.B.	274/77	Central Hospital Stores, Johannesburg: Renovation/Sentrale Hospitaalpakhuis, Johannesburg: Opknapping	11/11/1977
W.F.T.B.	275/77	Vereeniging Hospital: Erection of a block of flats for doctors./Vereenigingse Hospitaal: Oprigting van 'n woonstelblok vir dokters. Item 2059/73	25/11/1977
W.F.T.B.	276/77	Witwatersrand West: Transfer of prefabricated buildings./Witwatersrand-Wes: Ooplasing van voorafvervaardigde geboue	11/11/1977
R.F.T.	81/77	Commercial type petrol-driven or diesel-driven motor vehicles, heavy duty./Handelstipe petrol- of dieselaangedrewe motorvoertuie, swaardiens	18/11/1977
R.F.T.	82/77	Mobile cranes/Loopkrane	18/11/1977

IMPORTANT NOTES.

1. The relative tender documents including the Administration's official tender forms, are obtainable on application from the relative address indicated below. Such documents and any tender/contract conditions not embodied in the tender documents are also available for inspection at the said address:

Tender Ref.	Postal address, Pretoria	Office in New Provincial Building, Pretoria			
		Room No.	Block	Floor	Phone Pretoria
HA 1 & HA 2	Director of Hospital Services, Private Bag X221.	A740	A	7	48-9260
HB	Director of Hospital Services, Private Bag X221.	A728	A	7	48-9205
HC	Director of Hospital Services, Private Bag X221.	A728	A	7	48-9206
HD	Director of Hospital Services, Private Bag X221.	A730	A	7	48-0354
PFT	Provincial Secretary (Purchases and Supplies) Private Bag X64.	A1119	A	11	48-0924
RFT	Director, Transvaal Roads Department, Private Bag X197.	D307	D	3	48-0530
TED	Director, Transvaal Education Department, Private Bag X76.	A490 A489	A	4	48-9231 48-9437
WFT	Director, Transvaal Department of Works, Private Bag X228.	C112	C	1	48-0675
WFTB	Director, Transvaal Department of Works, Private Bag X228.	E105	E	1	48-0306

2. The Administration is not bound to accept the lowest or any tender and reserves the right to accept a portion of a tender.

3. In the case of each W.F.T.B. tender the tenderer must pay a deposit of R4 before he will be supplied with the tender documents. Such deposit must be in the form of cash, a bank initialled cheque, or a department standing deposit receipt (R10). The said deposit will be refunded if a **bona fide** tender is received from the tenderer or if the tender documents including plans, specifications and bills of quantities are returned by the tenderer within 14 days after the closing date of the tender to the relative address shown in note 1 above.

4. All tenders must be submitted on the Administration's official tender forms.

5. Each tender must be submitted in a separate sealed envelope addressed to the Chairman, Transvaal Provincial Tender Board, P.O. Box 1040, Pretoria, and must be clearly superscribed to show the tenderer's name and address, as well as the number, description and closing date of the tender. Tenders must be in the hands of the Chairman by 11h00 on the closing date indicated above.

6. If tenders are delivered by hand, they must be deposited in the Formal Tender Box at the Enquiry Office in the foyer of the New Provincial Building, at the Pretorius Street main entrance (near Bosman Street corner), Pretoria, by 11h00 on the closing date.

C. W. Grunow, Chairman, Transvaal Provincial Tender Board.
Pretoria, 5 October, 1977.

BELANGRIKE OPMERKINGS.

1. Die betrokke tenderdokumente, met inbegrip van die amptelike tendervorms van die Administrasie, is op aanvraag by die onderstaande adresse verkrygbaar. Sodanige dokumente asmede enige tender/kontrakvoorwaardes wat nie in die tenderdokumente opgeneem is nie, is ook by die genoemde adres vir inspeksie verkrygbaar:

Tender verwysing	Posadres te Pretoria	Kantoor in Nuwe Provinsiale Gebou, Pretoria			
		Kamer No.	Blok	Verdieping	Foon Pretoria
HA 1 & HA 2	Direkteur van Hospitaaldienste, Privaatsak X221.	A740	A	7	48-9260
HB	Direkteur van Hospitaaldienste, Privaatsak X221.	A728	A	7	48-9205
HC	Direkteur van Hospitaaldienste, Privaatsak X221.	A728	A	7	48-9206
HD	Direkteur van Hospitaaldienste, Privaatsak X221.	A730	A	7	48-0354
PFT	Provinsiale Sekretaris (Aankope en Voorrade), Privaatsak X64.	A1119	A	11	48-0924
RFT	Direkteur, Transvaalse Paaiedepartement, Privaatsak X197.	D307	D	3	48-0530
TOD	Direkteur, Transvaalse Onderwysdepartement, Privaatsak X76.	A490 A489	A	4	48-9231 48-9437
WFT	Direkteur, Transvaalse Werkedepartement, Privaatsak X228.	C112	C	1	48-0675
WFTB	Direkteur, Transvaalse Werkedepartement, Privaatsak X228.	E105	E	1	48-0306

2. Die Administrasie is nie daartoe verplig om die laagste of enige tender aan te neem nie en behou hom die reg voor om 'n gedeelte van 'n tender aan te neem.

3. In die geval van iedere W.F.T.B.-tender moet die tenderaar 'n deposito van R4 stort alvorens hy van die tenderdokumente voorsien sal word. Sodanige deposito moet in kontantgeld wees, 'n tjek deur die bank geparafeer of 'n departementele legorder kwitansie (R10). Genoemde depositobedrag sal terugbetaal word as 'n **bona fide**-inskrywing van die tenderaar ontvang word of as die tenderdokumente, met inbegrip van planne, spesifikasies en hoeveelheidslyste, binne 14 dae na die sluitingsdatum van die tenderaar teruggestuur word na die betrokke adres in opmerking 1 hierbo aangetoon.

4. Alle tenders moet op die amptelike tendervorm van die Administrasie voorgelê word.

5. Iedere inskrywing moet in 'n afsonderlike verseëlde koevert ingedien word, geadresseer aan die Voorsitter, Die Transvaalse Provinsiale Tenderraad, Posbus 1040, Pretoria, en moet duidelik van die opskrif voorsien wees ten einde die tenderaar se naam en adres aan te toon, asook die nommer, beskrywing en sluitingsdatum van die tender. Inskrywings moet teen 11h00 op die sluitingsdatum hierbo aangetoon, in die Voorsitter se hande wees.

6. Indien inskrywings per hand ingedien word, moet hulle teen 11h00 op die sluitingsdatum in die Formele Tenderbus geplaas wees by die navraagkantoor in die voorportaal van die nuwe Provinsiale Gebou by die hoofingang aan Pretoriusstraat se kant (naby die hoek van Bosmanstraat), Pretoria.

C. W. Grunow, Voorsitter, Transvaalse Provinsiale Tenderraad,
Pretoria, 5 Oktober 1977.

Notices By Local Authorities
Plaaslike Bestuurskennisgewings

VILLAGE COUNCIL OF GRASKOP.

AMENDMENT OF ABATTOIR REGULATIONS.

Notice is hereby given in terms of *section 96 of the Local Government* Ordinance, 1939, that the Council intends to request the Administrator to amend the following by-laws.

ABATTOIR REGULATIONS.

Amendment of standing fees.

Copies of this amendments lie open for inspection at the office of the Council for a period of fourteen days of publication hereof.

Any person who wishes to object against this amendments, must do so, in writing at the undersigned, within fourteen days after this notice has been published in the Provincial Gazette.

J. A. SCHEEPERS,
Town Clerk.

Municipal Office,
P.O. Box 18,
Graskop.
1270
12 October, 1977.
Notice No. 4/77.

DORPSRAAD VAN GRASKOP.

WYSIGING VAN ABATTOIRTARIEWE.

Daar word hierby ingevolge artikel 96 van die Ordonnansie op Plaaslike Bestuur, 1939, bekend gemaak dat die Raad voornemens is om die volgende verordeninge te wysig.

ABATTOIRTARIEWE.

Wysiging van bestaande tariewe.

Afskrifte van hierdie wysigings lê ter insae by die kantoor van die Raad vir 'n tydperk van veertien dae vanaf die datum van publikasie hiervan.

Enige persoon wat beswaar teen genoemde wysigings wens aan te teken, moet dit skriftelik doen binne 14 dae *na publikasie van hierdie kennisgewing* in die Provinsiale Koerant by die ondergetekende.

J. A. SCHEEPERS,
Stadsklerk.

Munisipale Kantore,
Posbus 18,
Graskop.
1270
12 Oktober 1977.
Kennisgewing No. 4/77.

1047—12—19

VILLAGE COUNCIL OF SWARTRUGGENS.

VALUATION ROLLS.

Notice is hereby given that the Triennial Valuation Roll 1977/80, and Interim Valuation Roll, 1974/77, have been completed and certified in accordance with the provisions of the Local Authorities Rating Ordinance, 1933, as amended, and that the said Rolls shall become fixed and binding upon all parties, who shall not have appealed within one month from the date of the first publication of this notice, against the decision of the Valuation Court, in the manner prescribed in the said Ordinance.

By order of the President of the Court.

P. J. LIEBENBERG,
Clerk of the Valuation Court.

Municipal Offices,
Private Bag 1018,
Swartruggens.
12 October, 1977.
Notice No. 15/77.

DORPSRAAD VAN SWARTRUGGENS.

WAARDERINGSLYSTE.

Kennis word hiermee gegee dat die Driejaarlikse Waarderingslys, 1977/80, en die tussentydse Waarderingslys, 1974/77, voltooi en gesertifiseer is, ooreenkomstig die bepalings van artikel 14 van die Plaaslike Bestuur-Belastingordonnansie, 1933, soos gewysig, en dat die lyste vasgestel en bindend sal wees op alle partye wat nie binne een maand vanaf datum van die eerste plasing van hierdie kennisgewing teen die beslissing van die Waarderingshof appelleer nie op die wyse soos in genoemde Ordonnansie voorgeskryf word.

Op las van die President van die Hof.

P. J. LIEBENBERG,
Klerk van die Waarderingshof.

Munisipale Kantore,
Privaatsak 1018,
Swartruggens.
12 Oktober 1977.
Kennisgewing No. 15/77.

1060—12—19

TOWN COUNCIL OF ALBERTON.

AMENDMENT TO ELECTRICITY BY-LAWS.

Notice is hereby given in terms of the provisions of section 96 of the Local Government Ordinance, 1939, as amended, that the Town Council of Alberton has amended its Electricity By-laws, adopted by the Council under Administrator's Notice 1475 of 30 August, 1972.

The general purport of the amendment is to increase the tariff for the supply of electricity in bulk in accordance with the increase thereof by the Electricity Supply Commission.

Copies of the abovementioned amendment are open for inspection during office hours at the office of the Council for a period of fourteen days from the date of publication of this notice.

Any person who desires to record his objection to the said amendment shall do so in writing to the Town Clerk within fourteen days of the date of publication of this notice.

A. G. LÖTTER,
Town Clerk.

Municipal Offices,
Alberton.
19 October, 1977.
Notice No. 56/1977.

STADSRAAD VAN ALBERTON.

WYSIGING VAN ELEKTRISITEITSVERORDENINGE.

Kennis geskied hiermee ingevolge die bepalinge van artikel 96 van die Ordonnansie op Plaaslike Bestuur, 1939, *soos gewysig, dat die Stadsraad* van Alberton sy Elektrisiteitsverordeninge aangeneem by Administrateurskennisgewing 1475 van 30 Augustus 1972, gewysig het.

Die algemene strekking van die wysigings is die verhoging in die prys vir die verskaffing van elektrisiteit in grootmaat in ooreenstemming met die verhoging daarvan deur die Elektrisiteitsvoorsieningskommissie. Afskrifte van bovermelde wysigings sal vir 'n tydperk van veertien dae vanaf die datum van publikasie van hierdie kennisgewing by die kantoor van die Raad gedurende kantoorure ter insae lê.

Enige persoon wat beswaar teen vermelde wysigings wil aanteken, moet dit skriftelik by die Stadsklerk doen binne *veertien dae na die datum van publikasie* van hierdie kennisgewing.

A. G. LÖTTER,
Stadsklerk.

Munisipale Kantoor,
Alberton.
19 Oktober 1977.
Kennisgewing No. 56/1977.

1067—19

TOWN COUNCIL OF BENONI.

AMENDMENT OF BY-LAWS.

Notice is hereby given in terms of section 96 of the Local Government Ordinance No. 17 of 1939, as amended, that the Council proposes to amend the following by-laws:

1. Water Supply By-laws:

To be amended to provide for the increased tariffs levied by the Rand Water Board with effect from 1st October, 1977.

2. By-laws Relating to Licences and Business Control:

To be amended to provide for a tariff of R1,00 for determining the mass of any vehicle on the public mass *measuring bridge, instead of the present* 50c per vehicle.

Copies of the proposed amendments, will be open for inspection in the office of the Clerk of the Council, Municipal Offices, Elston Avenue, Benoni, for a period of fourteen days from the date of publication hereof in the Provincial Gazette.

Any person who is desirous of recording his objection to the proposed amendments, must lodge such objection in writing with the undersigned within fourteen days after publication of this notice in the Provincial Gazette.

F. W. PETERS,
Town Clerk.

Municipal Offices,
Benoni.
19 October, 1977.
Notice No. 98 of 1977.

STADSRAAD VAN BENONI.

WYSIGING VAN VERORDENINGE.

Kennisgewing geskied hierby ooreenkomstig artikel 96 van die Ordonnansie op Plaaslike Bestuur No. 17 van 1939, soos gewysig, dat die Stadsraad voornemens is om die volgende verordeninge te wysig:

1. Watervoorsieningsverordeninge:

Gewysig te word om voorsiening te maak vir die verhoogde tariewe wat met ingang 1 Oktober 1977 deur die Randwaterraad gehef word.

2. Verordeninge Betreffende Lisensies en Beheer oor Besighede:

Gewysig te word om voorsiening te maak vir 'n tarief van R1,00 om die massa van enige voertuig op die openbare massameettoestel te bepaal, in plaas van die huidige 50c per voertuig.

Afskrifte van die voorgestelde wysigings is ter insae in die kantoor van die Klerk van die Raad, Munisipale Kantore, Elstonlaan, Benoni, vir 'n tydperk van veertien dae vanaf datum van publikasie hiervan in die Provinsiale Koerant.

Enige persoon wat beswaar teen die voorgestelde wysigings wil aanteken, moet sodanige beswaar skriftelik by die ondergetekende indien binne veertien dae vanaf die publikasiedatum van hierdie kennisgewing in die Provinsiale Koerant.

F. W. PETERS,
Stadsklerk.

Munisipale Kantore,
Benoni.
19 Oktober 1977.
Kennisgewing No. 98 van 1977.

1068—19

TOWN COUNCIL OF BETHAL.

ALIENATION OF GROUND.

Notice is hereby given in terms of section 79(18) of Ordinance 17 of 1939 that the Town Council proposes to sell by public auction, the industrial erven in Extension 6, Bethal.

A plan showing all the erven are open for inspection during office hours at the office of the Clerk of the Council, Municipal Offices, Bethal and any person who has an objection to the proposed selling of erven, should lodge his objection in writing to the undersigned within fourteen days after publication of this notice.

G. J. J. VISSER,
Town Clerk.

Municipal Offices,
P.O. Box 3,
Bethal.
2310.
19 October, 1977.
Notice No. 48/10/77.

STADSRAAD VAN BETHAL.

VERVREEMDING VAN EIENDOM.

Kennis geskied hiermee ingevolge artikel 79(18) van Ordonnansie 17 van 1939 dat die Stadsraad van voorneme is om die nywerheidserwe vir Uitbreiding 6, Bethal, per openbare veiling te verkoop.

'n Plan wat die voorgestelde erwe aantoon lê gedurende kantoorure ter insae in die kantoor van die Klerk van die Raad, Munisipale Kantore, Bethal en enigiemand wat besware en/of vertoë wil rig teen die voorgestelde verkoping van erwe, moet dit skriftelik doen, binne veertien dae na publikasie van hierdie kennisgewing.

G. J. J. VISSER,
Stadsklerk.

Munisipale Kantore,
Posbus 3,
Bethal.
2310.
19 Oktober 1977.
Kennisgewing No. 48/10/77.

1069—19

TOWN COUNCIL OF BOKSBURG.

PROCLAMATION OF WIDENING OF ROAD OVER ERF NO. 4, CASON TOWNSHIP.

(Notice in terms of section 5 of the Local Authorities Roads Ordinance, 1904).

Notice is hereby given in terms of the Local Authorities Roads Ordinance (No. 44 of 1904) as amended, that the Town Council of Boksburg has petitioned the Honourable, the Administrator, to proclaim the widening of the Road over Erf No. 4, Cason Township, as described in the schedule appended hereto.

A copy of the petition and plan showing the proposed road widening can be inspected in Room 106, First Floor, Municipal Offices, Boksburg during ordinary office hours from the date hereof until 5 December, 1977.

Objections, if any, to the proposed proclamation of the widening of the road must be lodged in writing and in duplicate with the Administrator of the Transvaal and the Town Clerk of Boksburg on or before 5 December, 1977.

LEON FERREIRA,
Town Clerk.

Town Hall,
Boksburg.
19 October, 1977.
Notice No. 53/77.

SCHEDULE.

DESCRIPTION OF THE ROAD REFERRED TO IN THE ABOVE NOTICE.

Trichardts Road is hereby widened on its western side by a strip of ground 3,5 metres wide proceeding northwards from the southern boundary of Erf No. 4, Cason Township for a distance of approximately 46 metres whence there is an irregular splay at the corner of Trichardts and Cason Roads, as will more fully appear on a plan signed by Surveyor R. E. Johnston and lying for inspection in Room 106, First Floor, Municipal Offices, Boksburg.

STADSRAAD VAN BOKSBURG.

PROKLAMERING VAN VERBREDING VAN PAD OOR ERF NO. 4, CASON DORPSGEBIED.

(Kennisgewing ingevolge artikel 5 van die Local Authorities Roads Ordinance, 1904).

Kennisgewing geskied hiermee ingevolge die bepalings van die "Local Authorities Roads Ordinance" (No. 44 of 1904) soos gewysig, dat die Stadsraad van Boksburg 'n versoekskrif aan sy Edele die Administrateur voorgelê het om die verbreding van die pad oor Erf No. 4, Cason Dorpsgebied soos in die bygaande bylae omskrywe, as openbare padgedeelte te proklameer.

'n Afskrif van die versoekskrif en 'n plan wat die voorgestelde padverbreding aandui lê vanaf datum hiervan tot en met 5 Desember 1977 gedurende gewone kantoorure ter insae in Kamer 106, Eerste Vloer, Stadhuis, Boksburg.

Besware teen die voorgestelde proklamasie van die padverbreding, indien enige, moet skriftelik in tweevoud, by sy Edele die Administrateur van Transvaal en die Stadsklerk van Boksburg uiterlik op 5 Desember 1977 ingedien word.

LEON FERREIRA,
Stadsklerk.

Stadhuis,
Boksburg.
19 Oktober 1977.
Kennisgewing No. 53/77.

BYLAE.

BESKRYWING VAN DIE PAD WAARNA DAAR IN BOSTAANDE KENNISGEWING VERWYS WORD.

Trichardtsweg word aan sy westekant verbreed deur 'n strook grond, 3,5 meter wyd, wat vanaf die suidelike grens van Erf No. 4, Cason Dorpsgebied noordwaarts vir 'n afstand van ongeveer 46 meter strek, waarvandaan daar 'n onegalige afskuinsing op die hoek van Trichardts- en Casonweg is soos meer volledig aangetoon op 'n plan geteken deur Landmeter R. E. Johnston en wat in Kamer No. 106, Eerste Vloer, Stadhuis, Boksburg ter insae lê.

1070—19—26—2

CARLETONVILLE MUNICIPALITY.

VALUATION ROLLS 1977/1980.

Notice is hereby given in terms of section 14 of the Local Authorities Rating Ordinance, 1933, as amended, that the General Valuation Roll and the Interim Valuation Roll have been completed and certified which will become binding upon all parties concerned, who did not lodge an appeal as prescribed in the Ordinance against the decision

of the Valuation Court on or before Monday, 21 November, 1977.

G. P. DU PREEZ,
Clerk of the Valuation Court.

Municipal Offices,
P.O. Box 3,
Carletonville.
19 October, 1977.
Notice No. 40/1977.

MUNISIPALITEIT VAN CARLETONVILLE.

WAARDERINGSLYSTE 1977/1980.

Kennis geskied hiermee ingevolge die bepalings van artikel 14 van die Plaaslike-Bestuur-Belastingordonnansie, 1933, soos gewysig, dat die Algemene Waarderingslys en die Tussentydse Waarderingslyste voltooi en gesertifiseer is en dat voormelde lyste vas en bindend sal wees op al die betrokke partye wat nie op of voor Maandag, 21 November 1977, op die wyse soos in die Ordonnansie voorgeskryf teen die Waarderingshof se beslissing appèl aangeteken het nie.

G. P. DU PREEZ,
Klerk van die Waarderingshof.

Munisipale Kantoor,
Posbus 3,
Carletonville.
19 Oktober 1977.
Kennisgewing No. 40/1977.

1071—19—26

HEALTH COMMITTEE OF DENDRON.

AMENDMENT TO BY-LAWS.

It is hereby notified, in terms of section 96 of the Local Government Ordinance, 1939, as amended, that the Health Committee of Dendron proposes to amend the following by-laws:

1. Removal of Refuse Tariff.
2. Slaughtering Fees.
3. Water Supply Tariff.
4. Townlands Regulations.

The purpose of the proposed amendments is to increase the tariffs for the supply of the above-mentioned services so as to adapt them to increasing costs.

Copies of this proposed amendments are for inspection at the office of the Secretary during office hours for a period of 14 (fourteen) days from the date of publication hereof. Any person who desire to record his objection to the proposed amendment shall do so in writing to the Secretary within fourteen days after the date of publication of this notice.

Q. T. STRYDOM,
Secretary.

Health Committee Offices,
P.O. Box 44,
Dendron.
0715
19 October, 1977.

GESONDHEIDSKOMITEE VAN DENDRON.

WYSIGING VAN VERORDENINGE.

Daar word ingevolge die bepalings van artikel 96 van die Ordonnansie op Plaaslike Bestuur, soos gewysig, bekend gemaak dat die Gesondheidskomitee van Dendron van voorneme is om die volgende verordeninge te wysig:

1. Vullisverwyderingstarief.
2. Slagfooie.
3. Waterverbruik.
4. Dorpsgrondregulasies.

Die doel van die voorgestelde wysigings is om tariewe vir die voorsiening van bogenoemde dienste te verhoog om by verhoogde kostes aan te pas. Afskrifte van die voorgestelde verordeninge lê ter insae by die kantoor van die Sekretaris vir 'n tydperk van 14 (veertien) dae gereken vanaf die datum van publikasie hiervan. Enige persoon wat beswaar teen die voorgenome wysigings wens aan te teken, moet dit skriftelik by die Sekretaris doen, binne veertien dae van die datum van publikasie hiervan.

Q. T. STRYDOM,
Sekretaris.

Gesondheidskomiteekantore,
Posbus 44,
Dendron,
0715.
19 Oktober 1977.

1072—19

CITY OF JOHANNESBURG.

PROPOSED AMENDMENT TO SOUTHERN JOHANNESBURG REGION TOWN-PLANNING SCHEME (SOUTHERN JOHANNESBURG REGION AMENDMENT SCHEME 122).

The City Council of Johannesburg has prepared a draft scheme to be known as Southern Johannesburg Region Amendment Scheme 122.

This draft scheme contains the following proposal:

To rezone part of Erf 2609, Lenasia Extension 1 Township, abutting on Tenth Avenue West (Sparrow Road) and Ninth Avenue (Penguin Road), from Public Open Space to Municipal.

The nearest intersection is Tenth Avenue West (Sparrow Road) and Ninth Avenue (Penguin Road) Lenasia Extension 1.

The effect of this scheme is to permit the erection of a subsidiary health clinic.

Particulars of this scheme are open for inspection at Room 715, 7th Floor, Civic Centre, Braamfontein, Johannesburg, for a period of four weeks from the date of the first publication of this notice, which is 19 October, 1977.

Any owner or occupier of immovable property situated within the area to which the above-named draft scheme applies or within 2 km of the boundary thereof may in writing lodge any objection with or may make any representations to the above-named local authority in respect of such draft scheme within four weeks of the first publication of this notice, which is 19 October 1977, and he may when lodging any such objection or making such representations request in writing that he be heard by the local authority.

S. D. MARSHALL,
Clerk of the Council.

Civic Centre,
Braamfontein,
Johannesburg.
19 October, 1977.

STAD JOHANNESBURG.

VOORGESTELDE WYSIGING VAN DIE SUIDELIKE JOHANNESBURGSTREEK-DORPSAANLEGSKEMA (WYSIGINGSKEMA 122 VAN DIE SUIDELIKE JOHANNESBURGSTREEKDORPSAANLEGSKEMA).

Die Stadsraad van Johannesburg het 'n ontwerpwysigingskema opgestel wat bekend sal staan as Wysigingskema 122 van die Suidelike Johannesburgstreekdorpsaanlegskema.

Hierdie ontwerpskema bevat die volgende voorstel:

Die indeling van 'n deel van Erf 2609, Lenasia Uitbreiding 1, wat aan Tiendelaan-Wes (Sparrow-weg) en Negendelaan (Penquinweg) grens, word van openbare oop ruimte na munisipale doeleindes verander.

Die naaste kruising is Tiendelaan-Wes (Sparrow-weg) en Negendelaan (Penquinweg), Lenasia Uitbreiding 1.

Die skema bring mee dat 'n bykliniek opgerig kan word.

Besonderhede van hierdie skema lê ter insae in Kamer 715, Sewende Verdieping, Burgersentrum, Braamfontein, Johannesburg, vir 'n tydperk van vier weke vanaf die datum waarop hierdie kennisgewing die eerste keer gepubliseer word, naamlik 19 Oktober 1977.

Enige eienaar of okkupant van vaste eiendom binne die gebied van die bogemelde dorpsbeplanningskema of binne 2 km van die grens daarvan het die reg om teen die skema beswaar te maak of om vertoë ten opsigte daarvan te rig en indien hy dit wil doen, moet hy die plaaslike bestuur binne vier weke vanaf die eerste publikasie van hierdie kennisgewing, naamlik 19 Oktober 1977, skriftelik in kennis stel en vermeld of hy deur die plaaslike bestuur gehoor wil word of nie.

S. D. MARSHALL,
Klerk van die Raad.

Burgersentrum,
Braamfontein,
Johannesburg.
19 Oktober 1977.

1073—19—26

CITY OF JOHANNESBURG.

PROPOSED AMENDMENT TO JOHANNESBURG TOWN-PLANNING SCHEME NO. 1, 1946, (JOHANNESBURG AMENDMENT SCHEME 1/1011).

The City Council of Johannesburg has prepared a draft scheme to be known as Johannesburg Amendment Scheme 1/1011.

This draft scheme contains the following proposal:

1. To rezone Erf 308, Waverley Extension 1 Township, being 10 Crawford Avenue, from Government to Special Residential at a density of one dwelling per erf.

2. To rezone Erf 312, Waverley Extension 1 Township, being 8 Crawford Avenue, from Public Open Space to Special Residential at a density of one dwelling per 1 000 m².

The nearest intersection is Crawford Avenue and Burns Street.

The effect of this scheme is to allow the erection of dwelling houses for occupation by a single family.

Particulars of this scheme are open for inspection at Room 715, 7th Floor, Civic Centre, Braamfontein, Johannesburg, for a period of four weeks from the date of the first publication of this notice, which is 19 October, 1977.

Any owner or occupier of immovable property situated within the area to which the above-named draft scheme applies or within 2 km of the boundary thereof may in writing lodge any objection with or may make any representations to the above-named local authority in respect of such draft scheme within four weeks of the first publication of this notice, which is 19 October, 1977, and he may when lodging any such objection or making such representations request in writing that he be heard by the local authority.

S. D. MARSHALL,
Clerk of the Council.

Civic Centre,
Braamfontein,
Johannesburg.
19 October, 1977.

STAD JOHANNESBURG.

VOORGESTELDE WYSIGING VAN DIE JOHANNESBURG-DORPSAANLEGSKEMA NO. 1, 1946 (JOHANNESBURG SE WYSIGINGSKEMA 1/1011).

Die Stadsraad van Johannesburg het 'n ontwerpwysigingskema, opgestel wat bekend sal staan as Johannesburg se Wysigingskema 1/1011.

Hierdie ontwerpskema bevat die volgende voorstel:

1. Die indeling van Erf 308, Waverley Uitbreiding 1, naamlik Crawfordlaan 10, word van regeringsdoeleindes na spesiale doeleindes, een woonhuis per erf, verander.

2. Die indeling van Erf 312, Waverley Uitbreiding 1, naamlik Crawfordlaan 8, word van openbare oop ruimte na spesiale woondoeleindes, een woonhuis per 1 000 m², verander.

Die naaste kruising is Crawfordlaan en Burnsstraat.

Die skema bring mee dat woonhuise vir bewoning deur 'n enkele gesin opgerig mag word.

Besonderhede van hierdie skema lê ter insae in Kamer 715, Sewende Verdieping, Burgersentrum, Braamfontein, Johannesburg, vir 'n tydperk van vier weke vanaf die datum waarop hierdie kennisgewing die eerste keer gepubliseer word, naamlik 19 Oktober 1977.

Enige eienaar of okkupant van vaste eiendom binne die gebied van die bogemelde dorpsbeplanningskema of binne 2 km van die grens daarvan het die reg om teen die skema beswaar te maak of om vertoë ten opsigte daarvan te rig en indien hy dit wil doen, moet hy die plaaslike bestuur binne vier weke vanaf die eerste publikasie van hierdie kennisgewing, naamlik 19 Oktober 1977, skriftelik in kennis stel en vermeld of hy deur die plaaslike bestuur gehoor wil word of nie.

S. D. MARSHALL,
Klerk van die Raad.

Burgersentrum,
Braamfontein,
Johannesburg.
19 Oktober 1977.

1074—19—26

CITY OF JOHANNESBURG.

PROPOSED AMENDMENT TO NORTHERN JOHANNESBURG REGION TOWN-PLANNING SCHEME (NORTHERN JOHANNESBURG REGION AMENDMENT SCHEME 786).

The City Council of Johannesburg has prepared a draft scheme to be known as Northern Johannesburg Region Amendment Scheme 786.

This draft scheme contains the following proposal:

To rezone Flax Street, Berario, between San Juan and Dolores Avenues from Public Street to Public Open Space.

The nearest intersections are San Juan Avenue and King Street and Dolores Avenue and King Street.

The effect of this scheme is to consolidate the existing park sites.

Particulars of this scheme are open for inspection at Room 715, 7th Floor, Civic Centre, Braamfontein, Johannesburg, for a period of four weeks from the date of the first publication of this notice, which is 19 October, 1977.

Any owner or occupier of immovable property situated within the area to which the abovenamed draft scheme applies or within 2 km of the boundary thereof may in writing lodge any objection with or may make any representations to the abovenamed local authority in respect of such draft scheme within four weeks of the first publication of this notice, which is 19 October, 1977, and he may when lodging any such objection or making such representations request in writing that he be heard by the local authority.

S. D. MARSHALL,
Clerk of the Council.

Civic Centre,
Braamfontein,
Johannesburg.
19 October, 1977.

STAD JOHANNESBURG.

VOORGESTELDE WYSIGING VAN DIE NOORD-JOHANNESBURGSE STREEK-DORPSAANLEGSKEMA (WYSIGINGSKEMA 786 VAN DIE NOORD-JOHANNESBURGSE STREEK-DORPSAANLEGSKEMA).

Die Stadsraad van Johannesburg het 'n ontwerpwysigingsdorpsaanlegskema opgestel wat bekend sal staan as Wysigingskema 786 van die Noord-Johannesburgse Streek-dorpsaanlegskema.

Hierdie ontwerpskema bevat die volgende voorstel:

Die indeling van Flaxstraat, Berario, tussen San Juan- en Doloreslaan, word van openbare straat na openbare oop ruimte verander.

Die naaste kruisings is San Juanlaan en Kingstraat en Doloreslaan en Kingstraat.

Die skema bring mee dat die bestaande parkterreine verenig kan word.

Besonderhede van hierdie skema lê ter insae in Kamer 715, sewende verdieping, Burgersentrum, Braamfontein, Johannesburg, vir 'n tydperk van vier weke vanaf die datum waarop hierdie kennisgewing die eerste keer gepubliseer word, naamlik 19 Oktober 1977.

Enige eienaar of okkupant van vaste eiendom binne die gebied van die bogemelde dorpsbeplanningskema of binne 2 km van die grens daarvan het die reg om teen die skema beswaar te maak of om vertoë ten opsigte daarvan te rig en indien hy dit wil doen, moet hy die plaaslike bestuur binne vier weke vanaf die eerste publikasie van hierdie kennisgewing, naamlik 19 Oktober 1977, skriftelik in kennis stel en vermeld of hy deur die plaaslike bestuur gehoor wil word of nie.

S. D. MARSHALL,
Klerk van die Raad.

Burgersentrum,
Braamfontein,
Johannesburg.
19 Oktober 1977.

1075—19—26

MEYERTON TOWN COUNCIL.

AMENDMENT TO WATER SUPPLY REGULATIONS.

It is hereby notified in terms of section 96 of the Local Government Ordinance, 1939, that the Town Council intends amending the following by-laws:

The Water Supply Regulations, published under Administrator's Notice 498, dated 29 December, 1943.

The general purport of the proposed amendments is to adopt higher tariffs to cover the increased tariffs of the Rand Water Board.

Copies of the proposed amendments are open for inspection at the office of the Clerk of the Council, Municipal Offices, Meyerton, for a period of fourteen days from the date of publication of this notice.

Objections, if any, to the proposed amendments, must be lodged in writing with the undersigned within fourteen days from the date of publication of this notice.

A. D. NORVAL,
Town Clerk.

Municipal Offices,
P.O. Box 9,
Meyerton,
1960.
19 October, 1977.
Notice No. 212.

STADSRAAD VAN MEYERTON.

WYSIGING VAN WATERBEWARINGSREGULASIES.

Daar word hiermee ingevolge artikel 96 van die Ordonnansie op Plaaslike Bestuur, 1939, bekend gemaak dat die Stadsraad voornemens is om die volgende verordeninge te wysig:

Die Waterbewaringsregulasies, afgekondig by Administrateurskennisgewing 498 van 29 Desember 1943.

Die algemene strekking van die voorgestelde wysigings is om verhoogde tariewe te aanvaar om die verhoogde tariewe van die Randwaterraad, te dek.

Afskrifte van die voorgestelde wysigings lê ter insae by die kantoor van die Klerk van die Raad, Munisipale Kantore, Meyerton, vir 'n tydperk van veertien dae vanaf die datum van publikasie van hierdie kennisgewing.

Besware, indien enige, teen die voorgestelde wysigings moet skriftelik binne veertien dae na die publikasie

van hierdie kennisgewing by die ondergetekende ingedien word.

A. D. NORVAL,
Stadsklerk.

Munisipale Kantore,
Posbus 9,
Meyerton.
1960.
19 Oktober 1977.
Kennisgewing No. 212.

1076—19

TOWN COUNCIL OF NELSPRUIT.

NELSPRUIT AMENDMENT SCHEME 1/61.

The Town Council of Nelspruit has prepared a draft amendment town-planning scheme to be known as Nelspruit Amendment Scheme 1/61.

This draft scheme contains the following proposals:

1. The rezoning of Erven 591, 599, 774 and 808, West Acres Extension 6 from "Municipal" to "Special Residential" with a density of "One dwelling per 10 000 ft²".

2. The rezoning of Erf 602, West Acres Extension 6 from "Special Residential" to "Public Street".

Particulars of this scheme lie open for inspection at the office of the Town Engineer, 3rd Floor, S.A. Permanent Building Society, Brown Street, Nelspruit for a period of 4 weeks from the date of the first publication of this notice which is 19 October, 1977.

Any owner or occupier of immovable property within the area of the abovementioned Town-planning Scheme or within 2 kilometres of the boundary thereof has the right to object to the scheme or to make representations in respect thereof and if he wishes to do so he shall within 4 weeks of the first publication of this notice which is 19 October, 1977, inform the local authority in writing of such objection or representation and shall state whether or not he wishes to be heard by the local authority.

J. N. JONKER,
Town Clerk.

Town Hall,
P.O. Box 45,
Nelspruit.
1200.
19 October, 1977.
Notice No. 77/77.

STADSRAAD VAN NELSPRUIT.

NELSPRUIT-WYSIGINGSKEMA 1/61.

Die Stadsraad van Nelspruit het 'n wysigingsdorpsbeplanningskema opgestel wat bekend sal staan as Nelspruit-wysigingskema 1/61.

Hierdie ontwerpskema bevat die volgende voorstelle:

1. Die hersonering van Erwe 591, 599, 774 en 808, West Acres Uitbreiding 6 van "Munisipaal" na "Spesiale Woon" met 'n digtheid van "Een woonhuis per 10 000 vt²".

2. Die hersonering van Erf 602, West Acres Uitbreiding 6 vanaf "Spesiale Woon" na "Publieke Straat".

Besonderhede van hierdie skema lê ter insae in die kantoor van die Stadsingenieur, 3de Vloer, S.A. Permanente Bouvereniginggebou, Brownstraat, Nelspruit vir 'n tydperk van 4 weke vanaf die datum van die eerste publikasie van hierdie kennisgewing naamlik 19 Oktober 1977.

Enige eienaar of okkupant van vaste eiendom binne die gebied van bogemelde dorpsbeplanningskema of binne 2 kilometer van die grens daarvan het die reg om teen die skema beswaar te maak of om vertoë ten opsigte daarvan te rig en indien hy dit wil doen moet hy die plaaslike bestuur binne 4 weke vanaf die eerste publikasie van hierdie kennisgewing naamlik 19 Oktober 1977 skriftelik van sodanige beswaar of vertoë in kennis stel en vermeld of hy deur die plaaslike bestuur gehoor wil word of nie.

J. N. JONKER,
Stadsklerk.

Munisipale Kantore,
Posbus 45,
Nelspruit.
1200.
19 Oktober 1977.
Kennisgewing No. 77/77.

1077—19—26

TOWN COUNCIL OF NELSPRUIT.

ADOPTION OF AND AMENDMENT TO BY-LAWS.

Notice is hereby given in terms of section 96 of the Local Government Ordinance, 1939, that the Town Council of Nelspruit intends to:

1. Amend the Public Health By-laws of the Nelspruit Municipality published under Administrator's Notice 148 dated 21 February, 1951, to increase the penalties for contravention of the by-laws and to allow only approved meat in butcher's shops;

2. adopt Parking Area By-laws to control the parking of vehicles in parking areas and to levy tariffs for such parking.

Copies of these by-laws are open for inspection during normal office hours at the office of the Clerk of the Council for a period of fourteen (14) days from the date of publication of this notice in the Provincial Gazette.

Any person who desires to record his objection to the adoption or amendment of the by-laws, must do so in writing to the Town Clerk within fourteen (14) days after date of publication of this notice in the Provincial Gazette.

J. N. JONKER,
Town Clerk.

Town Hall,
P.O. Box 45,
Nelspruit.
1200
19 October, 1977.
Notice No. 79/77.

STADSRAAD VAN NELSPRUIT.

AANVAARDING EN WYSIGING VAN VERORDENINGE.

Kennis geskied hiermee ingevolge die bepalings van artikel 96 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Stadsraad van Nelspruit van voorneme is om:

1. Die Publieke Gesondheidsverordeninge van die Munisipaliteit Nelspruit, afgekondig by Administrateurskennisgewing 148 van 21 Februarie 1951, te wysig deur die strawwe vir oortreding van die verordeninge te verhoog en slegs goedgekeurde vleis in slagterswinkels toe te laat;

2. Parkeerterreinverordeninge te aanvaar om die parkering van voertuie op parkeerterreine te reguleer en tariewe vir sodanige parkering te hef.

Afskrifte van hierdie verordeninge lê ter insae gedurende gewone kantoorure by die kantoor van die Klerk van die Raad vir 'n tydperk van veertien (14) dae vanaf die datum van publikasie van hierdie kennisgewing in die Provinsiale Koerant.

Enige persoon wat beswaar teen die aanvaarding of wysiging van die verordeninge wens aan te teken, moet dit skriftelik aan die Stadsklerk rig binne veertien (14) dae na die datum van publikasie van hierdie kennisgewing in die Provinsiale Koerant.

J. N. JONKER,
Stadsklerk.

Stadhuis,
Posbus 45,
Nelspruit.
1200
19 Oktober 1977.
Kennisgewing No. 79/77.

1078—19

VILLAGE COUNCIL OF OTTOSDAL.

PROPOSED CLOSING OF CEMETERY.

Notice is hereby given in terms of section 67 read with section 68 of the Local Government Ordinance, 1939, as amended, that it is the intention of the Council to close permanently the Cemetery situated in the Park on Louw-, Louisa- and Otto Streets, in extent 803 m².

The Cemetery shall be transferred to the Government for the purpose of the Ottosdal Commando.

A plan showing the cemetery and the relevant Council resolution may be inspected during normal office hours at the office of the Town Clerk.

Any person who has any objection to the intention of the Council or who may have any claim to compensation if such closing is carried out, must lodge his objection or claim, as the case may be, in writing with the undersigned on or before Wednesday, 21 December, 1977.

J. T. POTGIETER,
Town Clerk.

Municipal Office,
Ottosdal.
19 October, 1977.
Notice No. 12/1977.

DORPSRAAD VAN OTTOSDAL.

VOORGESTELDE SLUITING VAN BEGRAAFPLAAS.

Hiermee word ingevolge artikel 67 saamgelees met artikel 68 van die Ordonnansie op Plaaslike Bestuur, 1939, soos gewysig, kennis gegee dat die Raad voornemend is om, onderhewig aan die goedkeuring van die Administrateur, die Begraafplaas geleë in die Park aan Louw-, Louisa- en Ottostraat, groot 803 m², permanent te sluit.

Die Begraafplaas word aan die Regering oorgedra vir die doeleindes van die Ottosdal Kommando.

'n Plan waarop die Begraafplaas aangetoon word en die betrokke Raadsbesluit is gedurende gewone kantoorure by die kantoor van die Stadsklerk ter insae.

Enigiemand wat besware teen die voorneme van die Raad wil maak, of wat enige eis om vergoeding mag hê indien die sluiting plaasvind, moet sy beswaar of eis, al na die geval, skriftelik voor of op Woensdag, 21 Desember 1977, by die ondergetekende indien.

J. T. POTGIETER,
Stadsklerk.

Munisipale Kantoor,
Ottosdal.
19 Oktober 1977.
Kennisgewing No. 12/1977.

1079—19

TRANSVAAL BOARD FOR THE DEVELOPMENT OF PERI-URBAN AREAS.

AMENDMENT TO CEMETERY BY-LAWS.

It is hereby notified in terms of the provisions of section 96 of the Local Government Ordinance, 1939, that it is the Board's intention to amend the Cemetery By-laws in order to increase the tariffs for burials in the Mid-Ennerdale cemetery.

Copies of these amendments are open for inspection in Room A.408 at the Board's Head Office, 320 Bosman Street, Pretoria, for a period of fourteen days from the date of publication hereof.

Any person who desires to record his objection to the said amendments must do so in writing to the undermentioned within fourteen days after the date of publication of this notice in the Provincial Gazette.

J. J. H. BESTER,
Secretary.

P.O. Box 1341,
Pretoria.
19 October, 1977.
Notice No. 134/1977.

TRANSVAALSE RAAD VIR DIE ONTWIKKELING VAN BUITESTEDELIKE GEBIEDE.

WYSIGING VAN BEGRAAFPLAASVERORDENINGE.

Dit word bekend gemaak, ingevolge die bepalings van artikel 96 van die Ordonnansie op Plaaslike Bestuur, 1939, dat die Raad van voorneme is om die Begraafplaasverordeninge te wysig ten einde die tariewe vir teraardebestellings in die Mid-Ennerdale begraafplaas te verhoog.

Afskrifte van hierdie wysiging lê ter insae in Kamer A408 by die Raad se Hoofkantoor, Bosmanstraat 320, Pretoria vir 'n tydperk van veertien dae na die datum van publikasie hiervan.

Enige persoon wat beswaar teen genoemde wysigings wil aanteken moet dit skriftelik binne veertien dae na die datum van publikasie van hierdie kennisgewing in die Provinsiale Koerant by die ondergetekende doen.

J. J. H. BESTER,
Sekretaris.

Posbus 1341,
Pretoria.
19 Oktober 1977.
Kennisgewing No. 134/1977.

1080—19

PHALABORWA TOWN COUNCIL.

AMENDMENT TO UNIFORM TRAFFIC BY-LAWS AND REGULATIONS.

It is hereby notified that the Town Council of Phalaborwa proposes to request the Administrator to promulgate an amendment to the Uniform Traffic By-laws and Regulations published under Administrator's Notice 135 dated 25 February, 1959 and made applicable mutatis mutandis to the Phalaborwa Municipality by Administrator's Notice 307 dated 20 April, 1960, as amended.

The general purport of the amendment is to repeal all tariffs presently levied in terms of the above-mentioned by-laws.

Copies of the relevant amendment are open for inspection at the office of the Clerk of the Council during office hours for a period of 14 days from the date of publication hereof.

Any objections against the proposed amendment of the said by-laws must be lodged in writing with the undersigned not later than Thursday, 3 November, 1977.

W. J. PRETORIUS,
Town Clerk.

Municipal Offices,
P.O. Box 67,
Phalaborwa,
1390.
Tel. 2111.
19 October, 1977.
Notice No. 42/77.

STADSRAAD VAN PHALABORWA.

WYSIGING VAN EENVORMIGE VERKEERSVERORDENINGE.

Kennis geskied hiermee dat die Stadsraad van Phalaborwa van voorneme is om die Administrateur te versoek om die Eenvormige Verkeersverordeninge en regulasies afgekondig by Administrateurskennisgewing 135 van 25 Februarie 1959 en mutatis mutandis van toepassing gemaak op die Munisipaliteit van Phalaborwa by Administrateurskennisgewing 307 van 20 April 1960, soos gewysig, te wysig.

Die algemene strekking van die wysiging is om alle tariewe wat kragtens bovermelde verordeninge gehef word, te herroep.

Afskrifte van die betrokke wysiging lê ter insae by die kantoor van die Klerk van die Raad vir 'n tydperk van 14 dae vanaf publikasie hiervan.

Enige besware teen die betrokke wysiging van die verordeninge moet skriftelik by die ondergetekende ingedien word voor of op Donderdag 3 November 1977.

W. J. PRETORIUS,
Stadsklerk.

Munisipale Kantoor,
Posbus 67,
Phalaborwa,
1390.
Tel. 2111.
19 Oktober 1977.
Kennisgewing No. 42/77.

1081—19

TOWN COUNCIL OF SANDTON.

PROPOSED PERMANENT CLOSING OF MAGALIESZICHT AVENUE, DUNKELD WEST EXTENSION 5 TOWNSHIP.

(Notice in terms of section 67 of the Local Government Ordinance, 1939).

It is hereby made known that subject to the approval of the Administrator in terms of section 67 of the Local Government Ordinance, 1939, the Town Council of Sandton intends to permanently close Magalieszicht Avenue, Dunkeld West Extension 5 Township.

Further details and a plan showing the proposed street closure may be inspected during office hours in Room 506, Municipal Offices, West Street, Sandown, Sandton.

Any person who wishes to object to the proposal or to lodge a claim for compensation in respect of the proposals, must lodge such objection or claim in writing with the Town Clerk, P.O. Box 78001, Sandton, 2146, not later than 19 December, 1977.

J. J. HATTINGH,
Town Clerk.

Sandton.
19 October, 1977.
Notice No. 61/77.

STADSRAAD VAN SANDTON.

VOORGESTELDE PERMANENTE SLUITING VAN MAGALIESZICHTLAAN, DUNKELD WEST UITBREIDING 5 DORPSGEBIED.

(Kennisgewing ingevolge die bepalings van artikel 67 van die Ordonnansie op Plaaslike Bestuur, 1939).

Dit word hiermee bekend gemaak dat, onderhewig aan die goedkeuring van die Administrateur ingevolge artikel 67 van die Ordonnansie op Plaaslike Bestuur, 1939, die Stadsraad van Sandton voornemens is om Magalieszichtlaan, Dunkeld West Uitbreiding 5, permanent te sluit.

Verdere besonderhede en 'n plan wat die voorgestelde permanente straatsluiting aandui, lê gedurende kantoorure ter insae by Kamer 506, Munisipale kantore, Weststraat, Sandown, Sandton.

Enige persoon wat beswaar wil aanteken of 'n eis om skadevergoeding wil instel ten opsigte van die voorgestelde permanente straatsluiting moet sodanige beswaar of eis, voor of op 19 Desember 1977 skriftelik indien by die Stadsklerk, Posbus 78001, Sandton 2146.

J. J. HATTINGH,
Stadsklerk.

Sandton,
19 Oktober 1977.
Kennisgewing No. 61/77.

1082—19

TOWN COUNCIL OF SPRINGS.

PROPOSED CLOSING AND ALIENATION OF PORTION OF ASHLEY STREET, NEW STATE AREAS TOWNSHIP.

Notice is hereby given in terms of sections 67 and 79(18)(b) of the Local Government Ordinance, 1939, as amended, that it is the intention of the Town Council of Springs to permanently close a portion of Ashley Street, New State

Areas Township and to alienate same thereafter to the State.

Further particulars of the closing and alienation of the said street portion and a plan showing same are available for inspection at the office of the undersigned during ordinary office hours.

Any person who wishes to object to the closing and/or alienation of the said street portion and/or who may have a claim for compensation should such closing be carried out must lodge his objection and/or claim, as the case may be, in writing with the undersigned within sixty days after 19 October, 1977.

H. A. DU PLESSIS,
Clerk of the Council.

Civic Centre,
Springs.
19 October, 1977.
Notice No. 124/1977.

STADSRAAD VAN SPRINGS.

VOORGESTELDE SLUITING EN VERVREEMDING VAN 'N GEDEELTE VAN ASHLEYSTRAAT, DORP NEW STATE AREAS.

Kennis geskied hiermee ingevolge artikels 67 en 79(18)(b) van die Ordonnansie op Plaaslike Bestuur, 1939, soos gewysig, dat die Stadsraad van Springs van voorneme is om 'n gedeelte van Ashleystraat, dorp New State Areas permanent te sluit en daarna aan die Staat te vervreem.

Nadere besonderhede oor die sluiting en vervreemding van die straatgedeelte en 'n plan wat die straatgedeelte aantoon, lê ter insae in die kantoor van die ondergetekende tydens gewone kantoorure.

Enige persoon wat 'n beswaar het teen die sluiting van gemelde straatgedeelte en/of die vervreemding daarvan en/of wat 'n eis om skadevergoeding sal hê indien sodanige sluiting uitgevoer word, moet sodanige beswaar en/of eis, na gelang van die geval, skriftelik by die ondergetekende indien binne 'n tydperk van sestig dae na 19 Oktober 1977.

H. A. DU PLESSIS,
Klerk van die Raad.

Burgersentrum,
Springs.
19 Oktober 1977.
Kennisgewing No. 124/1977.

1083—19

TOWN COUNCIL OF STANDERTON.

PROPOSED AMENDMENT TO BY-LAWS.

It is hereby notified in terms of section 96 of the Local Government Ordinance No. 17 of 1939, as amended, that the Council intends to:

(a) Further amend the Swimming Bath By-laws published under Administrator's Notice No. 599 dated 21 August, 1957, as amended, by deleting all the charges;

(b) amend the Standard Water Supply By-laws published under Administrator's Notice No. 1273 dated 31 August, 1977, as amended, by adding certain tariffs 3 to 11.

The general purport of these amendments is to:

(a) Make the swimming bath available to the public and schools free of charge;

(b) make provisions in the "Tariff of Charges" which is attached as a Schedule to the Standard Water Supply By-laws for all the tariffs mentioned in the said by-laws.

Copies of these amendments are open for inspection at the office of the Council for a period of fourteen days from the date of publication hereof.

Any person who desires to record his objection to the said amendments must do so in writing to the undermentioned within 14 days after the date of publication of this notice in the Provincial Gazette.

J. C. VAN DER MERWE,
Acting Town Clerk.

Municipal Offices,
P.O. Box 66,
Standerton,
2430.
19 October, 1977.
Notice No. 44/1977.

STADSRAAD VAN STANDERTON.

VOORGENOME WYSIGING VAN VERORDENINGE.

Daar word hierby ingevolge artikel 96 van die Ordonnansie op Plaaslike Bestuur No. 17 van 1939, soos gewysig, bekend gemaak dat die Raad voornemens is om:

(a) Die Swembadverordeninge soos afgekondig by Administrateurskennisgewing No. 599 gedater 21 Augustus 1957, soos gewysig, hierby verder te wysig deur die betrokke gelde te skrap;

(b) die Standaard Watervoorsieningsverordeninge afgekondig by Administrateurskennisgewing No. 1273 gedateer 31 Augustus 1977, te wysig deur die byvoeging van sekere tariewe Nos. 3 tot 11.

Die algemene strekking van hierdie wysigings is om:

(a) Die swembad gratis aan die publiek en skole beskikbaar te stel;

(b) in die "Tarief van Gelde" wat as bylae tot die Standaard Watervoorsieningsverordeninge aangeheg, is voorsiening te maak vir al die tariewe gemeld in die genoemde verordeninge.

Afskrifte van hierdie wysigings lê ter insae by die kantoor van die Raad vir 'n tydperk van veertien dae vanaf datum van publikasie hiervan.

Enige persoon wat beswaar teen die genoemde wysigings wens aan te teken moet dit skriftelik binne 14 dae na die datum van publikasie van hierdie kennisgewing in die Provinsiale Koerant by die ondergetekende doen.

J. C. VAN DER MERWE,
Waarnemende Stadsklerk.

Munisipale Kantore,
Posbus 66,
Standerton.
2430
19 Oktober 1977.
Kennisgewing No. 44/1977.

1084—19

VOLKSRUST TOWN COUNCIL.

BY-LAWS RELATING TO HAWKERS.

Notice is hereby given that the Volksrust Town Council, subject to the approval of the Administrator intends to adopt by-laws to regulate and control hawkers.

Copies of the proposed by-laws in both official languages, are open for inspection during normal office hours in the office of the Town Clerk and objections, if any, should be lodged in writing to reach the undersigned within 14 days of publication hereof in the Provincial Gazette.

A. STRYDOM,
Town Clerk.

Municipal Offices,
P.O. Box 48,
Volksrust.
2470
19 October, 1977.
Notice No. 12/1977.

STADSRAAD VAN VOLKSRUST.

VERORDENINGE BETREFFENDE SMOUSE.

Kennisgewing geskied hiermee dat die Stadsraad van Volksrust van voorneme is om, onderhewig aan goedkeuring van die Administrateur, verordeninge om die bedrywighede van smouse te reguleer en te beheer aan te neem.

Afskrifte van die konsepverordeninge in beide amptelike tale, lê gedurende kantoorure ter insae vir inspeksie in die kantoor van die Stadsklerk. Besware, indien enige, moet skriftelik aan die ondergetekende gerig word en moet hom bereik binne 14 dae na publikasie hiervan in die Provinsiale Koerant.

A. STRYDOM,
Stadsklerk.

Munisipale Kantore,
Posbus 48,
Volksrust.
2470
19 Oktober 1977.
Kennisgewing No. 12/1977.

1085—19

TOWN COUNCIL OF WESTONARIA.

AMENDMENT TO WATER SUPPLY BY-LAWS.

Notice is hereby given in terms of section 96 of the Local Government Ordinance No. 17 of 1939, as amended, that it is the intention of the Town Council of Westonaria to amend its Water Supply By-laws published under Administrator's Notice 787 of 18 October, 1950, as amended.

The General purport of the amendment is to increase the tariffs.

Copies of the proposed amendments to the by-laws and tariffs, are open for inspection during office hours at the Municipal Offices, P.O. Box 19, Westonaria for a period of fourteen days after publication of this notice in the Official Gazette.

Any objection or representations to the proposed amendments must be lodged in writing with the undersigned within a period of fourteen days from

date of publication of this notice in the Official Gazette.

J. H. VAN NIEKERK,
Town Clerk.

Municipal Offices,
P.O. Box 19,
Westonaria.
19 October, 1977.
Municipal Notice No. 25/77.

STADSRAAD VAN WESTONARIA.

WYSIGING VAN WATERVOORSIENINGSVERORDENINGE.

Ingevolge die bepalings van artikel 96 van die Ordonnansie op Plaaslike Bestuur No. 17 van 1939, soos gewysig, word hiermee bekend gemaak dat die Stadsraad van Westonaria voornemens is om die Watervoorsieningsverordeninge afgekondig by Administrateurskennisgewing 787 van 18 Oktober 1950, soos gewysig, verder te wysig.

Die algemene strekking van hierdie wysiging is die verhoging van tariewe.

Afskrifte van die voorgestelde wysigings aan die verordeninge en tariewe lê ter insae by die Munisipale Kantoor, Posbus 19, Westonaria gedurende kantoorure vir 'n tydperk van veertien dae vanaf publikasie van hierdie kennisgewing in die Provinsiale Koerant.

Enige besware of vertoë teen die voorgestelde wysigings moet skriftelik by ondergetekende ingedien word binne 'n tydperk van veertien dae vanaf datum van publikasie van hierdie kennisgewing in die Provinsiale Koerant.

J. H. VAN NIEKERK,
Stadsklerk.

Munisipale Kantoor,
Posbus 19,
Westonaria.
19 Oktober 1977.
Kennisgewing No. 26/77.

1086—19

TOWN COUNCIL OF ZEERUST.

PROPOSED AMENDMENT TO THE ZEERUST TOWN-PLANNING SCHEME 1958.

The Town Council of Zeerust has prepared a draft amendment town-planning scheme to be known as Amendment Scheme 1/18.

This draft scheme contains the following proposal:

The inclusion of Zeerust Extension 2 in the Town-planning Scheme of Zeerust and the amendment of certain erven.

Particulars of this scheme are open for inspection at the office of the Town Clerk, for a period of four weeks from the date of the first publication of this notice which is 19 October, 1977.

The local authority will consider whether or not the scheme should be adopted.

Any owner or occupier of immovable property within the area of the abovementioned town-planning scheme or within 2 km of the boundary thereof has the right to object to the scheme or to make representations in respect thereof and if he wishes to do so he shall within four weeks of the first publication of this notice which is 19 October, 1977, inform the local authority, in writing, of such state whether or not he wishes to be heard by the local authority.

B. J. ROBINSON,
Town Clerk.

Municipal Offices,
P.O. Box 92,
Zeerust.
19 October, 1977.
Notice No. 21/1977.

STADSRAAD VAN ZEERUST.

VOORGESTELDE WYSIGING VAN ZEERUST-DORPSAANLEGSKEMA 1958.

Die Stadsraad van Zeerust het 'n ontwerp-wysigingsdorpbeplanningskema opgestel wat bekend sal staan as Wysigingskema 1/18.

Hierdie ontwerpskema bevat die volgende voorstel:

Die *insluiting van Zeerust Uitbreiding* 2 in die Dorpbeplanningskema van Zeerust en wysiging van sekere erwe.

Besonderhede van hierdie skema lê ter insae in die kantoor van die Stadsklerk, vir 'n tydperk van vier weke vanaf die datum van die eerste publikasie van hierdie kennisgewing naamlik 19 Oktober 1977.

Die plaaslike owerheid sal die skema oorweeg en besluit of dit aangeneem moet word al dan nie.

Enige eienaar of okkupant van vaste eiendom binne die gebied van bogemelde dorpsbeplanningskema of binne 2 km van die grens daarvan het die reg om teen die skema beswaar te maak of om vertoë ten opsigte daarvan te rig en indien hy dit wil doen, moet hy die plaaslike owerheid binne vier weke vanaf die eerste publikasie van hierde kennisgewing, naamlik 19 Oktober 1977, skriftelik van sodanige beswaar of vertoë in kennis stel en vermeld of hy deur die plaaslike owerheid gehoor wil word of nie.

B. J. ROBINSON,
Stadsklerk.

Munisipale Kantoor,
Posbus 92,
Zeerust.
19 Oktober 1977.
Kennisgewing No. 21/1977.

1087—19—26

TOWN COUNCIL OF BOKSBURG.

PROCLAMATION OF WIDENING OF DAYAN ROAD, DAYANGLEN AND DAYANGLEN EXTENSION NO. 1 TOWNSHIP.

(Notice in terms of section 5 of the Local Authorities Roads Ordinance, 1904).

Notice is hereby given in terms of the Local Authorities Roads Ordinance (No. 44 of 1904), as amended, that the Town Council of Boksburg has petitioned the Honourable, the Administrator, to proclaim the widening of Dayan Road as described in the schedule appended hereto.

A copy of the petition and a plan showing the proposed road widening can be inspected in Room 106, First Floor, Municipal Offices, Boksburg during normal working hours from the date hereof until 5 December, 1977.

Objections, if any, to the proposed proclamation of the widening of the road must be lodged in writing and in duplicate with the Administrator of Transvaal and the Town Clerk of Boksburg on or before 5 December, 1977.

LEON FERREIRA,
Town Clerk.

Town Hall,
Boksburg.
19 October, 1977.
Notice No. 48/77.

SCHEDULE.

POINT-TO-POINT DESCRIPTION: PROCLAMATION OF WIDENING OF DAYAN ROAD, DAYANGLEN AND DAYANGLEN EXTENSION NO. 1 TOWNSHIP.

A portion of Dayan Road in the townships of Dayanglen and Dayanglen Extension No. 1 is hereby widened on its Northern side by a strip of land 6,55 metres wide along the entire southern boundaries of Portions 177, 178 and 195 of the farm Driefontein No. 85-I.R. and for a distance of approximately 13 metres from the south-western corner of Portion 179 of the farm Driefontein No. 85-I.R. as will more fully appear from a plan prepared by Land Surveyor A. M. Dunstan and lying for inspection *during normal office hours in Room No.* 106, First Floor, Municipal Offices, Boksburg.

STADSRAAD VAN BOKSBURG.

PROKLAMERING VAN VERBREDING VAN DAYANWEG, DAYANGLEN EN DAYANGLEN UITBREIDING NO. 1 DORPSGEBIED.

(Kennisgewing ingevolge artikel 5 van die Local Authorities Roads Ordinance, 1904).

Kennisgewing geskied hiermee ingevolge die bepalings van die "Local Authorities Road Ordinance" (No. 44 van 1904) soos gewysig, dat die Stadsraad van Boksburg 'n versoekskrif aan sy Edele die *Administrateur voorgelê* het om die verbreding van Dayanweg soos in die bygaande bylae omskrywe, as openbare padgedeeltes te proklameer.

'n Afskrif van die versoekskrif en 'n plan wat die voorgestelde padverbreding aandui lê vanaf datum hiervan tot en met 5 Desember 1977 gedurende gewone kantoorure ter insae in Kamer 106, Eerste Vloer, Stadhuis, Boksburg.

Besware teen die voorgestelde proklamasie van die padverbreding, indien *enige, moet skriftelik in tweevoud*, by sy Edele die Administrateur van Transvaal en die Stadsklerk van Boksburg uiterlik op 5 Desember 1977 ingedien word.

LEON FERREIRA,
Stadsklerk.

Stadhuis,
Boksburg.
19 Oktober 1977.
Kennisgewing No. 48/77.

BYLAE.

PUNT-TOT-PUNT-BESKRYWING: PROKLAMERING VAN VERBREDING VAN DAYANWEG, DAYANGLEN EN DAYANGLEN UITBREIDING NO. 1 DORPSGEBIED.

'n Gedeelte van Dayanglen in die dorpsgebiede Dayanglen en Dayanglen Uitbreiding No. 1 word hiermee aan sy noordekant deur 'n strook grond, 6,55 meter wyd, langs die volle suidelike

grense van Gedeeltes 177, 178 en 195 van die plaas Driefontein No. 85-I.R. en vir 'n afstand van ongeveer 13 meter vanaf die suidwestelike hoek van **Gedeelte 179 van die plaas Driefontein No. 85-I.R. verbreed soos meer volledig aangetoon op 'n plan wat deur Landmeter A. M. Dunstan opgestel is en wat** gedurende gewone kantoorure in Kamer 106, Eerste Vloer, Stadhuis, Boksburg ter insae lê.

1088—19—26—2

CONTENTS

Proclamations

214. Boksburg Municipality: Proclamation of road ... 3369
215. Verwoerdburg Municipality: Proclamation of road ... 3369
216. Proclamation of Roads (as described) as building restriction roads ... 3370
217. Amendment of Title Conditions of Erf 1070, Three Rivers Township Extension 1, district Vereeniging ... 3376
218. Amendment of Title Conditions of Erf 1193, Ferndale Township, district Johannesburg and Randburg Amendment Scheme 44 ... 3373
219. Amendment of Title Conditions of Portion 74 and the Remaining Extent of Portion 75 of the farm Roodekopjes or Zwartkopjes 427-J.Q., district Brits ... 3376
220. Amendment of Title Conditions of Lot 1169, Ferndale Township, district Johannesburg and Randburg Amendment Scheme 95 3377
221. Amendment of Title Conditions of Holding 32, Simarlo Agricultural Holdings Extension 2, district Pretoria ... 3376
222. Amendment of Title Conditions of Erf 151, Casseldale Township, district Springs ... 3377
223. Amendment of Title Conditions of Lot 1243, Yeoville Township, Registration Division I.R., Transvaal ... 3380
224. Amendment of Title Conditions of Erf 246, Eloffsdal Township, Registration Division J.R., Transvaal ... 3380
225. Amendment of Title Conditions of Holding 476, North Riding Agricultural Holdings, district Roodepoort ... 3380

Administrator's Notices

1546. Barberton Municipality: Adoption of Standard By-laws Relating to Cafés, Restaurants and Eating-houses ... 3381
1547. Correction Notice. Town Council of Brakpan: Withdrawal of Exemption from Rating 3381
1548. Bedfordview Municipality: Flammable Liquids and Substances By-laws ... 3381
1549. Benoni Municipality: Amendment to Drainage and Plumbing By-laws ... 3423
1550. Carletonville Municipality: Amendment to Water Supply By-laws ... 3425
1551. Graskop Municipality: Sanitary and Refuse Removals Tariff ... 3427
1552. Krugersdorp Municipality: Amendment to Parking Grounds By-laws ... 3428
1553. Messina Municipality: Adoption of Standard Water Supply By-laws ... 3429
1554. Meyerton Municipality: Adoption of Standard Drainage By-laws ... 3429
1555. Meyerton Municipality: Amendment to Water Supply Regulations ... 3429
1556. Middelburg Municipality: Amendment to Traffic By-laws ... 3430
1557. Middelburg Municipality: Amendment to By-laws Relating to Dogs ... 3431
1558. Nylstroom Municipality: Amendment to Electricity By-laws ... 3431
1559. Nylstroom Municipality: Amendment to Townlands By-laws ... 3433
1560. Orkney Municipality: Amendment to By-laws for the Fixing of Fees for the Issuing of Certificates, the Furnishing of Information and Copies of Plans, the Hiring of Equipment and Sundry Matters ... 3433
1561. Ottosdal Municipality: Amendment to Library By-laws ... 3434
1562. Ottosdal Municipality: Adoption of Standard By-laws Relating to Cafés, Restaurants and Eating-houses ... 3434
1563. Phalaborwa Municipality: Adoption of Amendment to Standard Food-handling By-laws ... 3435
1564. Pietersburg Municipality: Amendment to Electricity By-laws ... 3435
1565. Application of Amendment to Standard Food-handling By-laws to the Pongola Health Committee ... 3436

INHOUD

Proklamasies

214. Munisipaliteit Boksburg: Proklamasie van pad ... 3369
215. Munisipaliteit Verwoerdburg: Proklamasie van pad ... 3369
216. Proklamering van paaie (soos beskryf) tot boubeperkingspaaie ... 3370
217. Wysiging van Titelvoorwaardes van Erf 1070, dorp Three Rivers Uitbreiding 1, distrik Vereeniging ... 3376
218. Wysiging van Titelvoorwaardes van Erf 1193, dorp Ferndale, distrik Johannesburg en Randburg-wysigingskema 44 ... 3373
219. Wysiging van Titelvoorwaardes van Gedeelte 74 en die Resterende Gedeelte van Gedeelte 75 van die plaas Roodekopjes of Zwartkopjes 427-J.Q., distrik Brits ... 3376
220. Wysiging van Titelvoorwaardes van Lot 1169, dorp Ferndale, distrik Johannesburg en Randburg-wysigingskema 95 ... 3377
221. Wysiging van Titelvoorwaardes van Hoewe 32, Simarlo Landbouhoewes Uitbreiding 2, distrik Pretoria ... 3376
222. Wysiging van Titelvoorwaardes van Erf 151, dorp Casseldale, distrik Springs ... 3377
223. Wysiging van Titelvoorwaardes van Lot 1243, dorp Yeoville, Registrasie Afdeling I.R., Transvaal ... 3380
224. Wysiging van Titelvoorwaardes van Erf 246, dorp Eloffsdal, Registrasie Afdeling J.R., Transvaal ... 3380
225. Wysiging van Titelvoorwaardes van Hoewe 476, North Riding Landbouhoewes, distrik Roodepoort ... 3380

Administrateurskennisgewings

1546. Munisipaliteit Barberton: Aanname van Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise ... 3381
1547. Kennisgewing van Verbetering. Stadsraad van Brakpan: Intrekking van vrystelling van Eiendomsbelasting ... 3381
1548. Munisipaliteit Bedfordview: Vlambare Vloeistowwe en Stowwe Verordeninge ... 3381
1549. Munisipaliteit Benoni: Wysiging van Rioleerings- en Loodgietersverordeninge ... 3423
1550. Munisipaliteit Carletonville: Wysiging van Watervoorsieningsverordeninge ... 3425
1551. Munisipaliteit Graskop: Sanitêre en Vullisverwyderingstarief ... 3427
1552. Munisipaliteit Krugersdorp: Wysiging van Parkeerterreinverordeninge ... 3428
1553. Munisipaliteit Messina: Aanname van Standaard Watervoorsieningsverordeninge ... 3429
1554. Munisipaliteit Meyerton: Aanname van Standaard Rioleringsverordeninge ... 3429
1555. Munisipaliteit Meyerton: Wysiging van Waterbewaringsregulasies ... 3429
1556. Munisipaliteit Middelburg: Wysiging van Verkeersverordeninge ... 3430
1557. Munisipaliteit Middelburg: Wysiging van Verordeninge Betreffende Honde ... 3431
1558. Munisipaliteit Nylstroom: Wysiging van Elektrisiteitsverordeninge ... 3431
1559. Munisipaliteit Nylstroom: Wysiging van Dorpsgrondeverordeninge ... 3433
1560. Munisipaliteit Orkney: Wysiging van Verordeninge insake die Vasstelling van Gelde vir die Uitreiking van Sertifikate, die Verskaffing van Inligting en Afdrukke van Planne, die Huur van Toerusting en Allerlei Aangeleenthede ... 3433
1561. Munisipaliteit Ottosdal: Wysiging van Biblioteekverordeninge ... 3434
1562. Munisipaliteit Ottosdal: Aanname van Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise ... 3434
1563. Munisipaliteit Phalaborwa: Aanname van Wysiging van Standaardvoedselhanteringsverordeninge ... 3435
1564. Munisipaliteit Pietersburg: Wysiging van Elektrisiteitsverordeninge ... 3435
1565. Toepassing van Wysiging van Standaardvoedselhanteringsverordeninge op die Gesondheidskomitee van Pongola ... 3436

1566. Application of Standard By-laws Relating to Cafés, Restaurants and Eating-houses to the Pongola Health Committee 3436
1567. Ventersdorp Municipality: Amendment to Dog and Dog Licence By-laws 3436
1568. Vereeniging Municipality: Amendment to Cemetery By-laws 3437
1569. Vereeniging Municipality: By-laws Relating to the Hire of the Vereeniging Civic Theatre 3438
1570. Wolmaransstad Municipality: Sanitary and Refuse Removals Tariff 3448
1571. Rant-en-dal Extension 2 Township: Declaration of an approved township 3449
1572. Krugersdorp Amendment Scheme 1/98 3451
1573. Alberton Amendment Scheme 114 3452
1574. Notice of Correction: Kempton Park Amendment Scheme 1/75 3452
1575. Johannesburg Amendment Scheme 1/862 3452
1576. Widening of Provincial Road: District of Lichtenburg 3453
1577. Declaration, Deviation and Widening of Public District Road 2430 and declaration of an access road: Districts of Delareyville and Schweizer-Reneke 3453
1578. Appointment of Road Board Member 3455

General Notices

403. Bookmaker's Licence: A. M. de S. Rodriques 3462
405. Northern Johannesburg Region Amendment Scheme 1019 3462
406. Northern Johannesburg Region Amendment Scheme 1024 3462
407. Johannesburg Amendment Scheme 1/1001 3463
408. Randburg Amendment Scheme 124 3463
409. Randburg Amendment Scheme 125 3464
410. Johannesburg Amendment Scheme 1/1005 3464
411. Pretoria Amendment Scheme 370 3465
412. Johannesburg Amendment Scheme 1/999 3465
413. Proposed Establishment of Townships: Readvertisement. 1) Wilkoppies Extension 23 3456
414. Proposed Establishment of Townships: 1) Paulshof Extension 14; 2) Goedeburg Extension 2 3458
416. Proposed Establishment of Townships. 1) Towerby Extension 4; 2) Sabie Extension 9 3460
417. Removal of Restrictions Act 84 of 1967 3466
418. Johannesburg Amendment Scheme 1/1009 3466
419. Randburg Amendment Scheme 127 3467
420. Northern Johannesburg Region Amendment Scheme 1028 3467
421. Randburg Amendment Scheme 126 3468
422. Southern Johannesburg Region Amendment Scheme 123 3468
423. Randburg Amendment Scheme 119 3469
424. Johannesburg Amendment Scheme 1/1002 3469
425. Boksburg Amendment Scheme 191 3470
426. Klerksdorp Amendment Scheme 109 3470
427. Ermelo Amendment Scheme 1/50 3471
428. Edenvale Amendment Scheme 1/137 3471
429. Randburg Amendment Scheme 131 3472
430. Pretoria Amendment Scheme 397 3472
431. Pretoria Amendment Scheme 396 3473
432. Randburg Amendment Scheme 129 3473
433. Pretoria Amendment Scheme 375 3474
434. Vanderbijlpark Amendment Scheme 65 3474
435. Randburg Amendment Scheme 113 3475
436. Southern Johannesburg Region Amendment Scheme 125 3475
437. Roodepoort-Maraisburg Amendment Scheme 305 3476
438. Pretoria Amendment Scheme 376 3476
439. Pretoria Amendment Scheme 398 3477
440. Application to enter into contract for conveyance of school children 3477
441. Application to enter into contract for conveyance of school children 3478
442. Application to enter into contract for conveyance of school children 3478
443. Application to enter into contract for conveyance of school children 3479
444. In the Supreme Court of South Africa 3479

Tenders 3481

Notices by Local Authorities 3483

1566. Toepassing van Standaardverordeninge Betreffende Kafees, Restaurante en Eethuise op die Gesondheidskomitee van Pongola 3436
1567. Munisipaliteit Ventersdorp: Wysiging van Verordeninge Betreffende Honde en Hondelisensies 3436
1568. Munisipaliteit Vereeniging: Wysiging van Begraafplaasverordeninge 3437
1569. Munisipaliteit Vereeniging: Verordeninge Betreffende die Verhuur van die Vereeniging Stadskouburg 3438
1570. Munisipaliteit Wolmaransstad: Sanitêre en Vullisverwyderingstarief 3448
1571. Dorp Rant-en-dal Uitbreiding 2: Verklaring tot goedgekeurde dorp 3449
1572. Krugersdorp-wysigingskema 1/98 3451
1573. Alberton-wysigingskema 114 3452
1574. Kennisgewing van Verbetering. Kemptonpark-wysigingskema 1/75 3452
1575. Johannesburg-wysigingskema 1/862 3452
1576. Verbreding van Provinsiale Pad: Distrik Lichtenburg 3453
1577. Verklaring, Verlegging en Verbreding van Openbare Distrikspad 2430 en verklaring van toegangspad: Distrikte Delareyville en Schweizer-Reneke 3453
1578. Benoeming van Padraadlid 3455

Algemene Kennisgewings.

403. Bookmakerslisensie: A. M. de S. Rodriques 3462
405. Noordelike Johannesburgstreek-wysigingskema 1019 3462
406. Noordelike Johannesburgstreek-wysigingskema 1024 3462
407. Johannesburg-wysigingskema 1/1001 3463
408. Randburg-wysigingskema 124 3463
409. Randburg-wysigingskema 125 3464
410. Johannesburg-wysigingskema 1/1005 3464
411. Pretoria-wysigingskema 370 3465
412. Johannesburg-wysigingskema 1/999 3465
413. Voorgestelde Stigting van Dorpe: Heradvertensie. 1) Wilkoppies Uitbreiding 23 3457
414. Voorgestelde Stigting van Dorpe: 1) Paulshof Uitbreiding 14; 2) Goedeburg Uitbreiding 2 3459
416. Voorgestelde Stigting van Dorpe: 1) Towerby Uitbreiding 4; 2) Sabie Uitbreiding 9 3461
417. Wet op Opheffing van Beperkings 84 van 1967 3466
418. Johannesburg-wysigingskema 1/1009 3466
419. Randburg-wysigingskema 127 3467
420. Noordelike Johannesburgstreek-wysigingskema 1028 3467
421. Randburg-wysigingskema 126 3468
422. Suidelike Johannesburgstreek-wysigingskema 123 3468
423. Randburg-wysigingskema 119 3469
424. Johannesburg-wysigingskema 1/1002 3469
425. Boksburg-wysigingskema 191 3470
426. Klerksdorp-wysigingskema 109 3470
427. Ermelo-wysigingskema 1/50 3471
428. Edenvale-wysigingskema 1/137 3471
429. Randburg-wysigingskema 131 3472
430. Pretoria-wysigingskema 397 3472
431. Pretoria-wysigingskema 396 3473
432. Randburg-wysigingskema 129 3473
433. Pretoria-wysigingskema 375 3474
434. Vanderbijlpark-wysigingskema 65 3474
435. Randburg-wysigingskema 113 3475
436. Suidelike Johannesburgstreek-wysigingskema 125 3475
437. Roodepoort-Maraisburg-wysigingskema 305 3476
438. Pretoria-wysigingskema 376 3476
439. Pretoria-wysigingskema 398 3477
440. Aansoek om sluiting van kontrak vir vervoer van skoolkinders 3477
441. Aansoek om sluiting van kontrak vir vervoer van skoolkinders 3478
442. Aansoek om sluiting van kontrak vir vervoer van skoolkinders 3478
443. Aansoek om sluiting van kontrak vir vervoer van skoolkinders 3479
444. In die Hooggeregshof van Suid-Afrika 3479

Tenders 3481

Plaaslike Bestuurskennisgewings 3483

Printed for the Transvaal Provincial Administration, Pta., by Hoofstadpers Beperk, P.O. Box 422, Pretoria.

Gedruk vir die Transvaalse Provinsiale Administrasie, Pta., deur Hoofstadpers Beperk, Posbus 422, Pretoria.